



STATIONARY WORKHOLDING

SinterGrip

The New Choice



Lowest clamping depth without pre-marking



SINTERGRIP


The New Choice



The advantages of the system

SinterGrip: the new choice

Page 4



Jaws

All in one, Standard, Starter Kit

Page 14



Technical features


Page 6



Products

All in one, Standard, Starter Kit

Page 16



Charts

Penetration depth / clamping force

Page 10



Accessories

Page 20



Clak System

Quick change system

Page 12



Clak

Modular parallels

Page 21



Application examples


Milling on horizontal machining centre, vertical machining centre and 5 axis

Page 13

SinterGrip


The New Choice

Clamping Insert

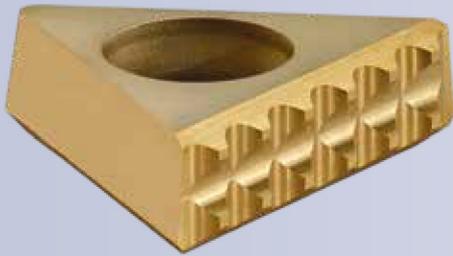

SinterGrip Clamping Insert


WATCH THE VIDEO



Marks on the Workpiece




Comparison Clamping Depths

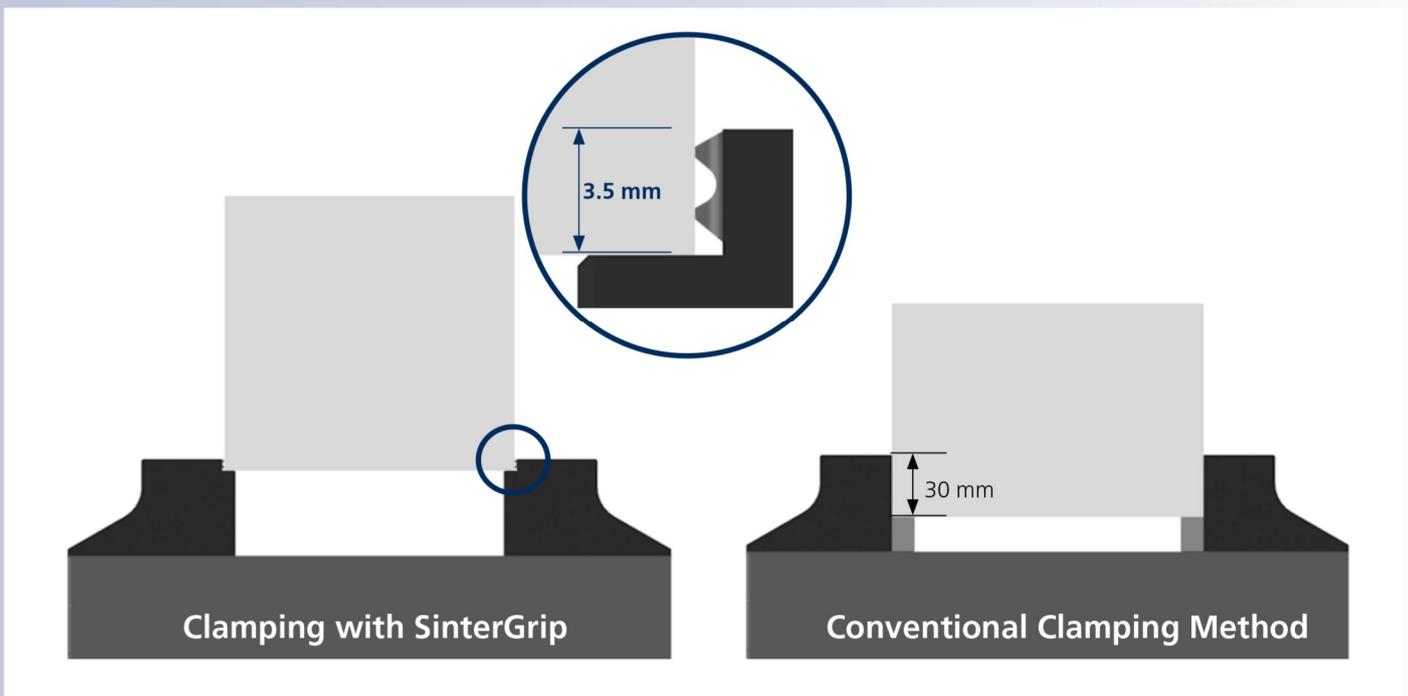

Lowest clamping depth of workpieces – no pre-marking

Benefits

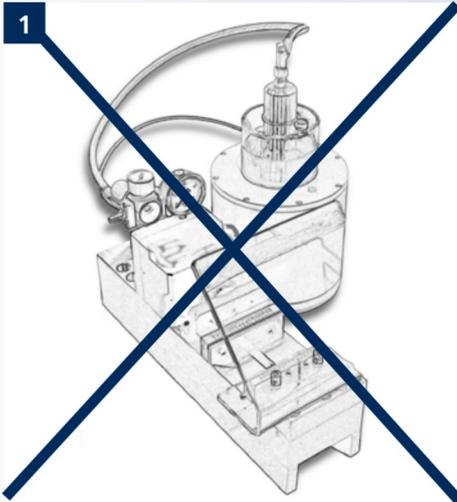

No pre-marking necessary

- Elimination of the costs for a pre-mark machine and set-up times




No dove tail pre-machining of the workpiece necessary

- Elimination of the costs for the pre-machining


3 different versions for all materials:

- Steel
- Hardened Steel | Titanium (until 54 HRC)
- Aluminium | Plastic

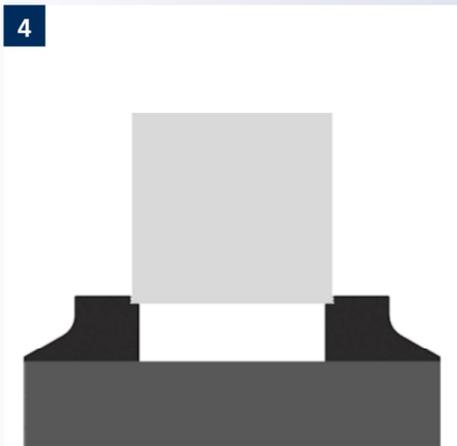


Best accessibility and highest holding forces

- Safe clamping of workpieces
- Ideal for 5-axis machining
- High material saving due to lowest clamping depth only 3.5 mm

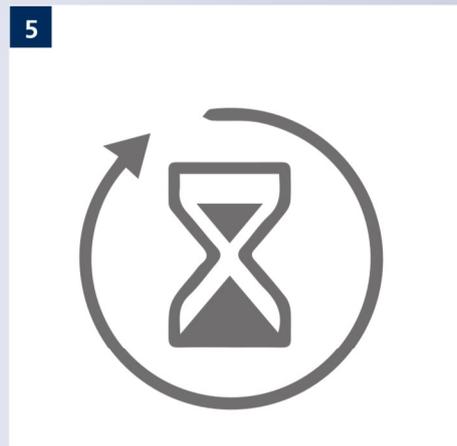

Maximum lifetime | No wear costs Huge metal removal rate = less time to machine the workpiece

- SinterGrip clamping inserts are made from coated carbide steel and have maximum lifetime

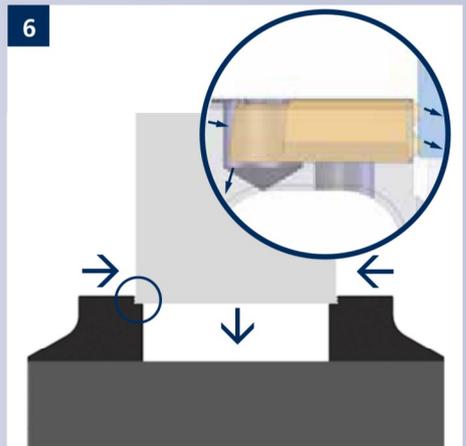

Pull-down effect | Active vibration absorption


- Even distribution of the clamping forces and active vibration absorption
- Geometric couplings without any clearance

SinterGrip


The New Choice

Technical Features


SinterGrip are solid carbide serrated inserts type ISO P30:P35 and coated with method PVD

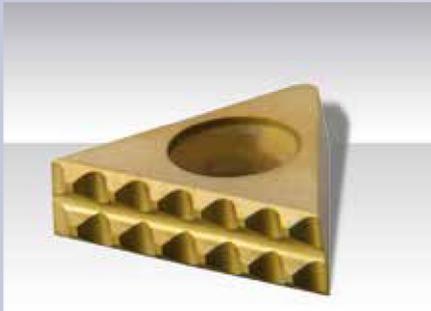

Coated cemented carbide currently represents 80-90% of all cutting tool inserts. Its success as a tool material is due to its unique combination of wear resistance and toughness, and its ability to be formed in complex shapes.

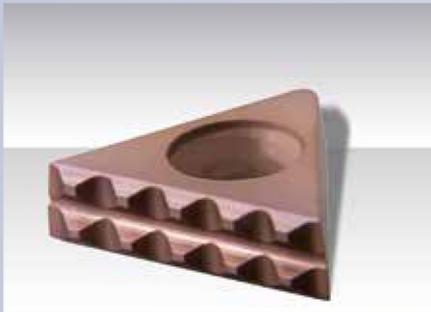

Coated cemented carbide combines cemented carbide with a coating. Together they form a grade which is customized for its application.

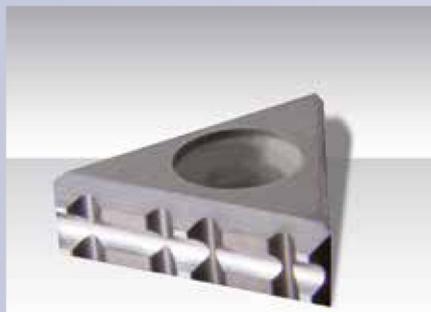





The big advantage of **SinterGrip** is therefore the combination of this material together with its own teeth sharpening, the special tapered shape and the special triangular shape, coming from detailed studies by our technical department.

In a general sense, the insert with its own special section of pyramid shape and special teeth sharpening penetrates into the material of the workpiece and creates some coupling without any clearance, unloading the forces and the vibrations, becoming a sole body with the vise and the workpiece.



Technical Features

- 1 The special triangular shape creates a coupling without any clearance, in fact:
 - It divides the clamping forces;
 - It allows high coupling precision between the gripper (insert) and the jaw of the vise;
 - It absorbs the vibrations, allowing high stability.
- 2 The special tapered shape (5 degrees) of the inserts section: creates pull-down effect into the insert which is transferred to the workpiece, avoiding the lifting of the same.
- 3 The special teeth sharpening:
 - The lower angle is bigger than the upper one. This creates a pull-down effect on the workpiece;
 - Permits, after the engraving, to clamp the workpiece with a lower clamping force, avoiding any deformation of the same.
- 4 The combination of both elements (the tapered shape and the teeth sharpening) creates a double **pull-down** effect.

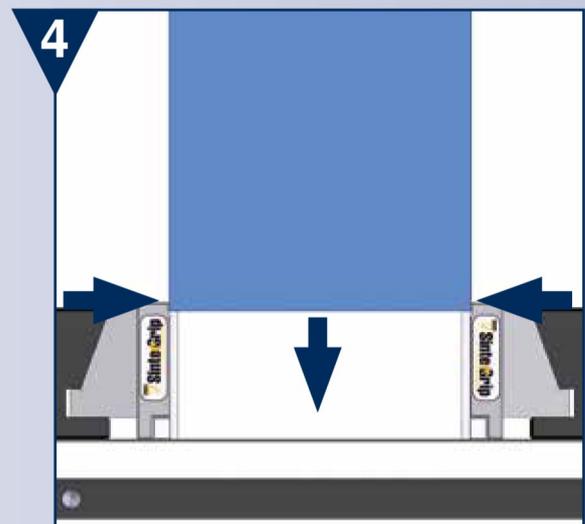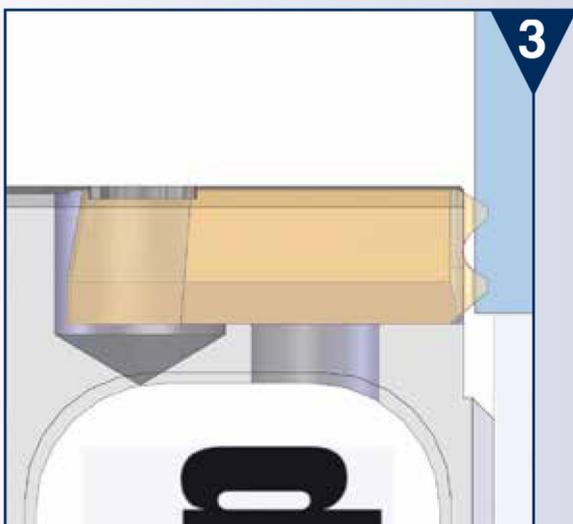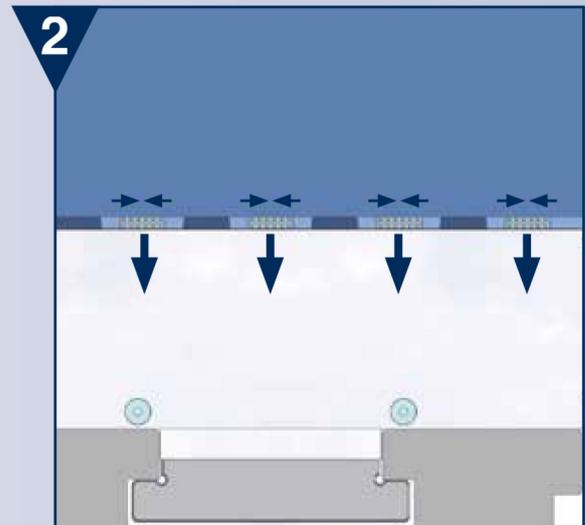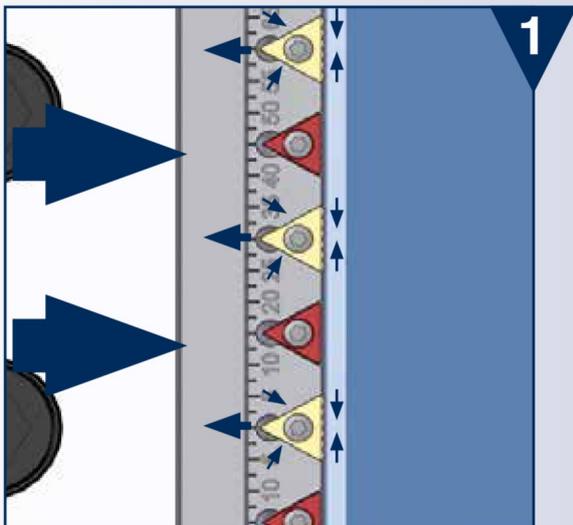


SinterGrip

The New Choice


Technical Features



SinterGrip insert for steel (STD)

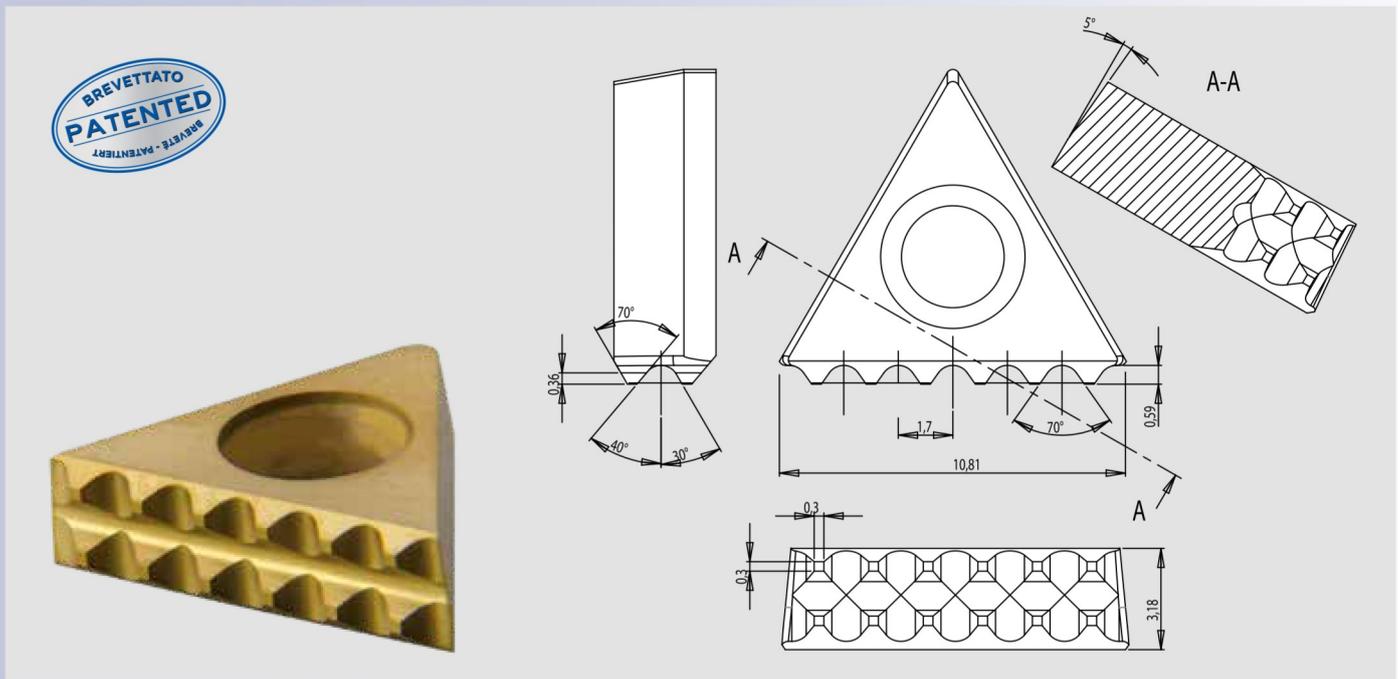


SinterGrip insert for hard steel / titanium (until 50-54 HRC)

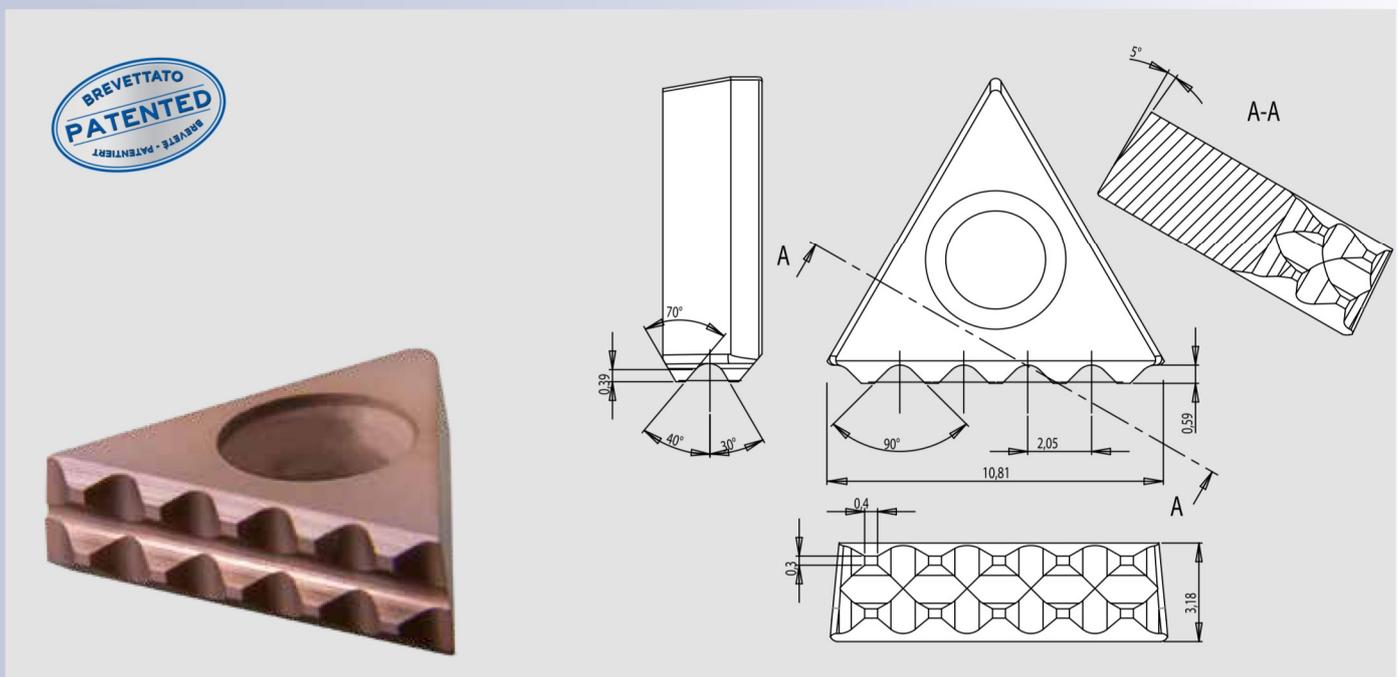


Technical Features

SinterGrip insert for aluminium (ALU)

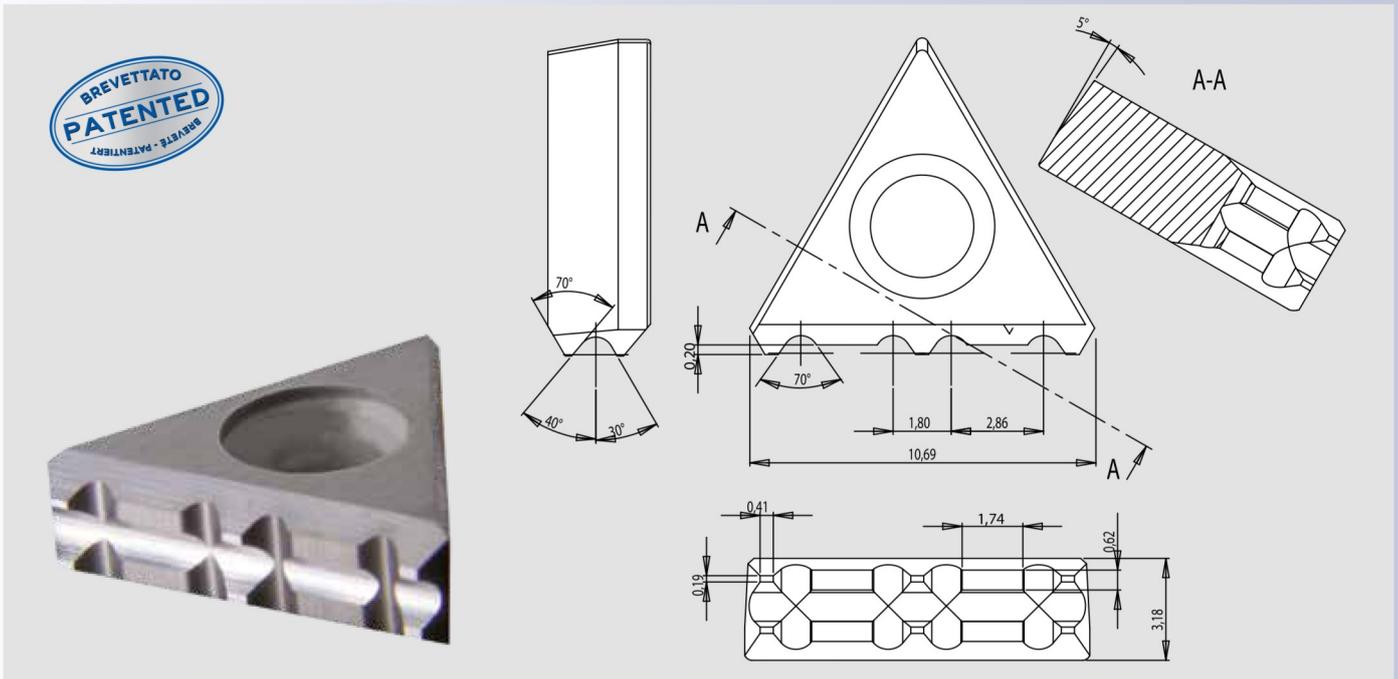

Engraving in aluminium

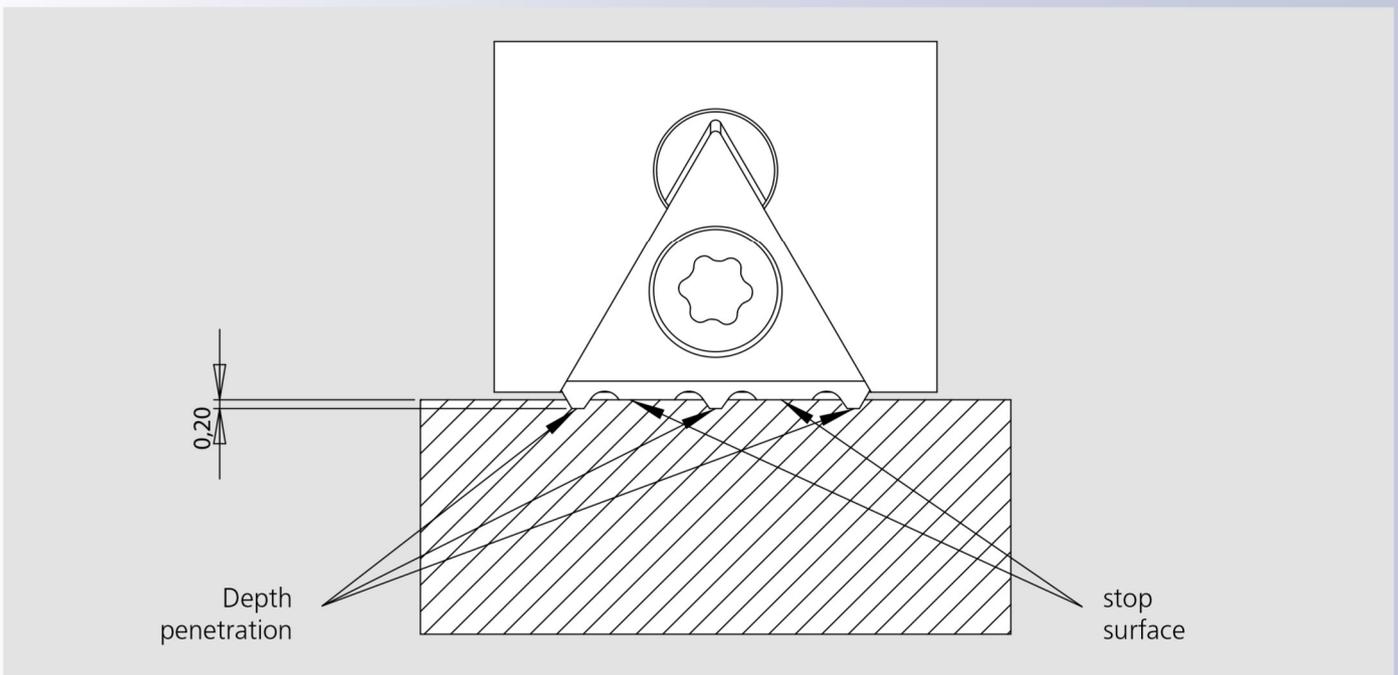


SinterGrip


The New Choice

Charts


The values indicated in the chart are those of the penetration of each tooth of the insert, in relation to the number of inserts used, the type of material and the clamping force.

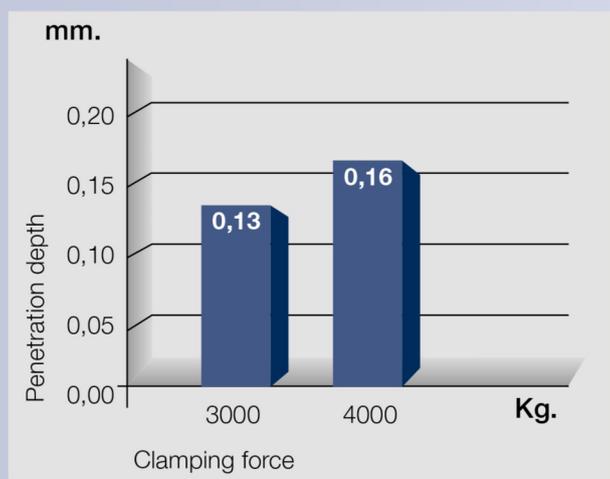

Steel with tensile strength $\approx 980 \text{ N/mm}^2$
n. 5 inserts for jaw
10 inserts total
clamping surface 3,5 mm

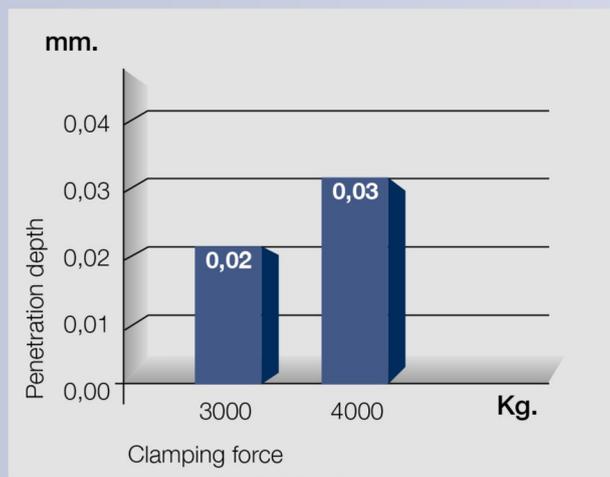

Hardened steel HRC 50-54
n. 5 inserts for jaw
10 inserts total
clamping surface 3,5 mm

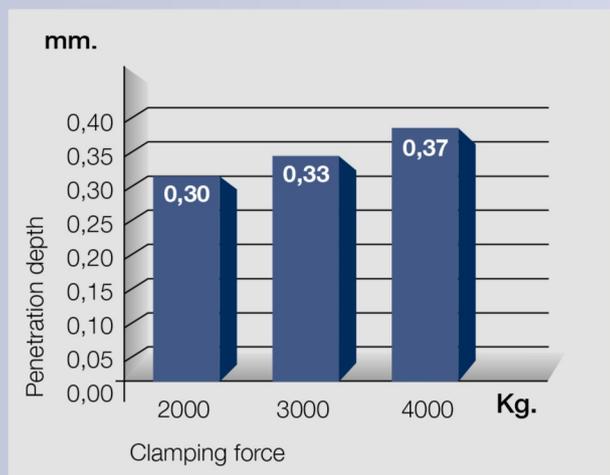


Aluminium
n. 5 inserts for jaw
10 inserts total
clamping surface 3,5 mm

Charts


The ratio between inserts and penetration depth is inversely proportional, that is, fewer inserts = more penetration

Steel with tensile strength $\approx 980 \text{ N/mm}^2$
 n. 1 inserts for jaw
 2 inserts total
 clamping surface 3,5 mm

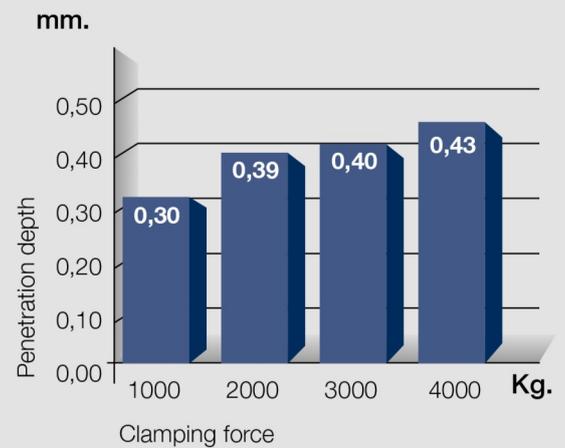


The same proportion is comparable to the clamping surface for only 2 mm, that is with one row of teeth per insert (see chart).

Steel with tensile strength $\approx 980 \text{ N/mm}^2$
 n. 5 inserts for jaw
 10 inserts total
 clamping surface 2 mm

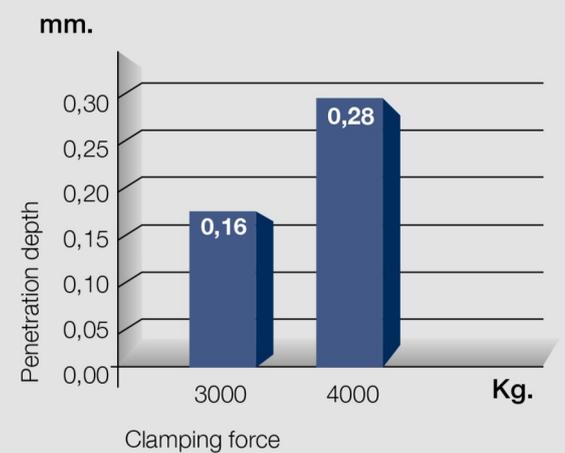


Example
 Steel with tensile strength $\approx 980 \text{ N/mm}^2$
 n. 5 inserts for jaw
 10 inserts total
 clamping surface 3,5 mm


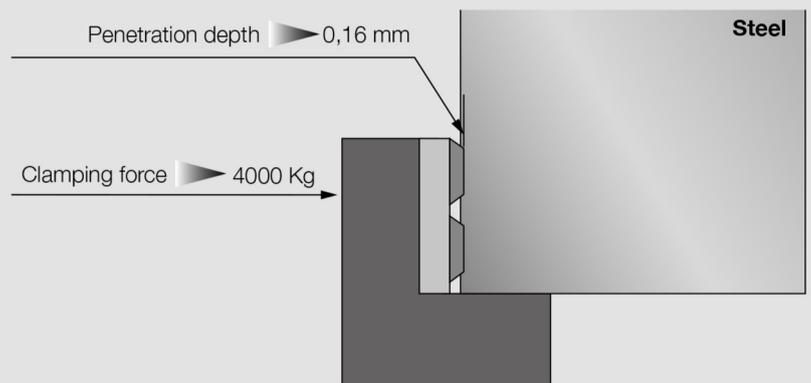


The New Choice


The SinterGrip method is proposed together with our unique quick change **CLAK System** for a perfect combination of performances.

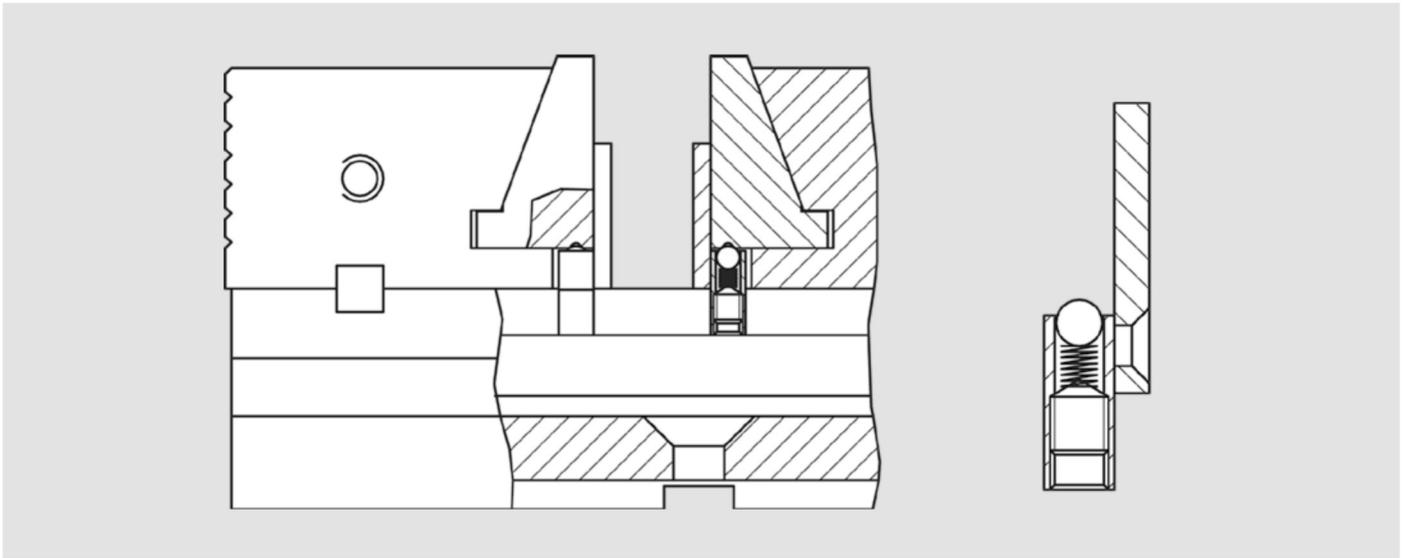

CLAK System for OML vise

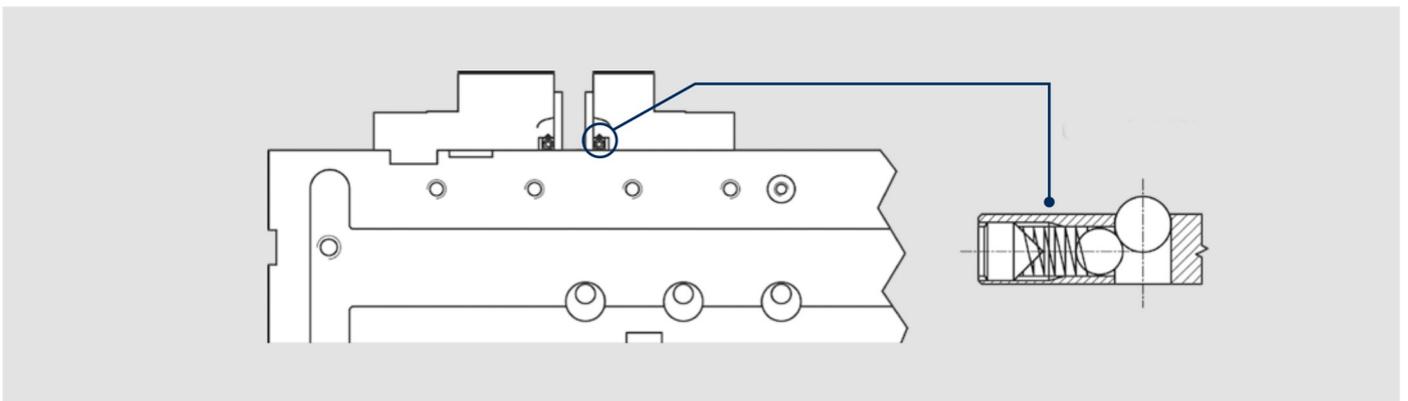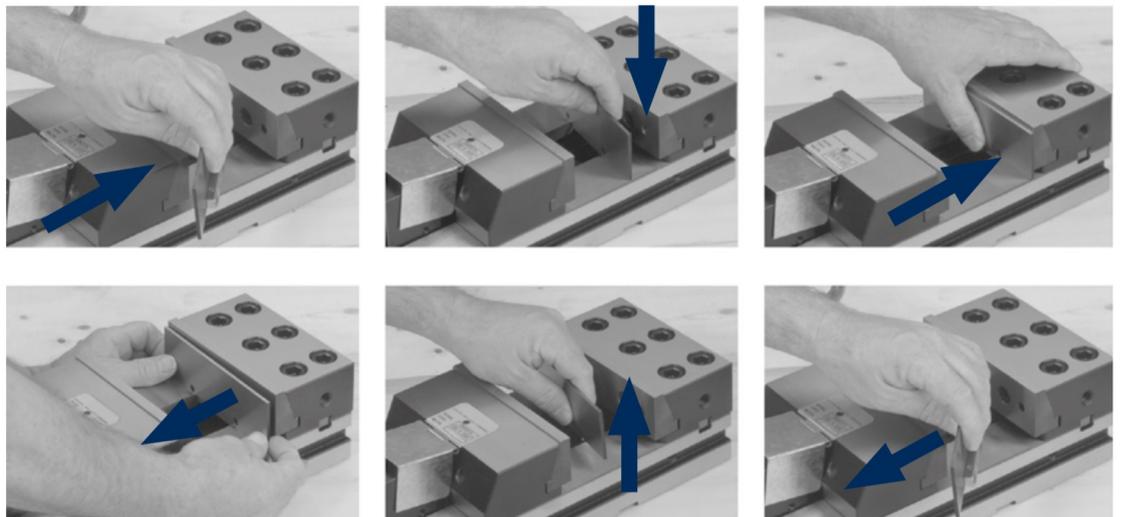


Universal CLAK System

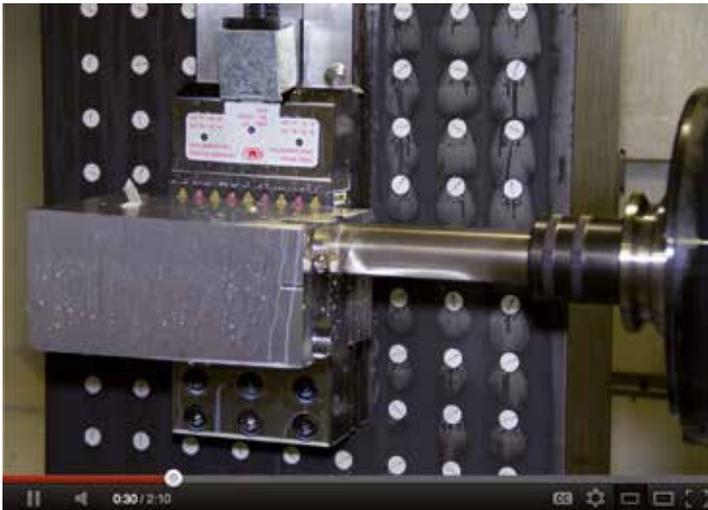

Milling on horizontal machining centre



Milling on vertical machining centre

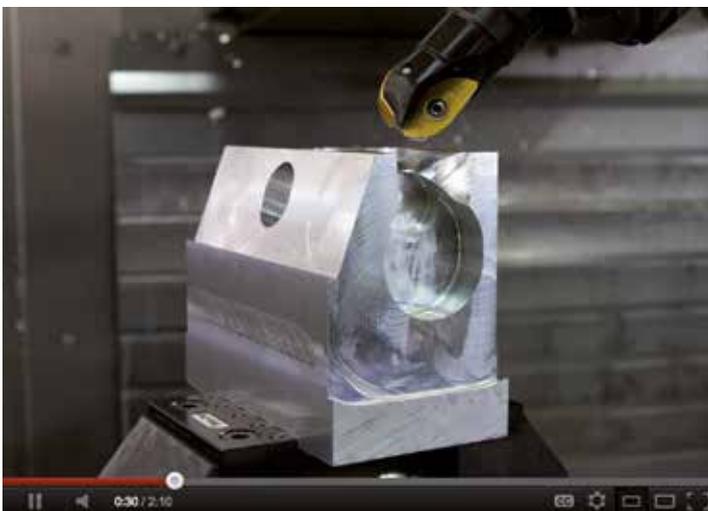

Milling on 5 axis



SinterGrip can be used with all the mechanical, mechanical-hydraulic or hydraulic clamping systems. For all the other clamping systems, please check the compatibility of these systems with grippers.

SinterGrip is proposed in the following possibilities:

ALL IN ONE



- 1 Shape of the self-centering seat of the insert with dovetail interlocking
- 2 Fixing holes to the vise
- 3 Tungsten carbide coating for better grip in the second operation
- 4 Seat for Clak system
- 5 Made of steel with tensile strength $\approx 1.080 \text{ N/mm}^2$ + nitriding




STANDARD




- 1** Shape of the self-centering seat of the insert with dovetail interlocking
- 2** Fixing holes to the vise
- 3** Seat for Clak system
- 4** Made of steel with tensile strength $\approx 1.080 \text{ N/mm}^2$ + nitriding

STARTER KIT

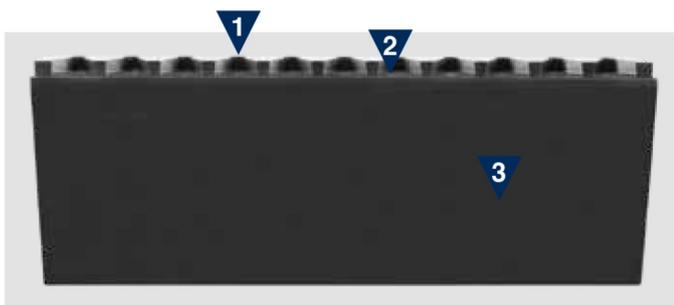

- 1** Shape of the self-centering seat of the insert with dovetail interlocking
- 2** Step 3,5x4 mm
- 3** Made of steel with tensile strength $\approx 980 \text{ N/mm}^2$ + nitriding

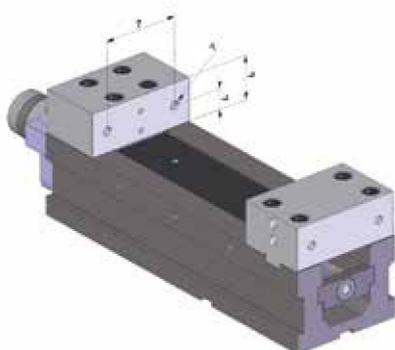


Take the necessary dimensions of your vise



Mill the jaws to the necessary height



Drill the jaws at the same height of the supports of the vise

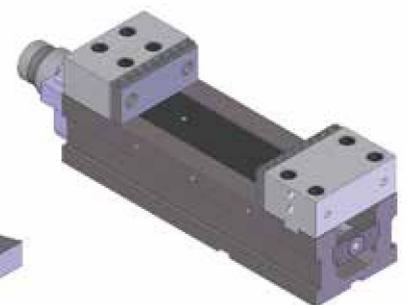


Mount the kit on your vise

ALL IN ONE



Pair of jaws with tungsten carbide coating.

The set includes one pair of jaws, 1 pair of parallels (PP), 1 wrench TORX T9 and one kit of 10 screws.

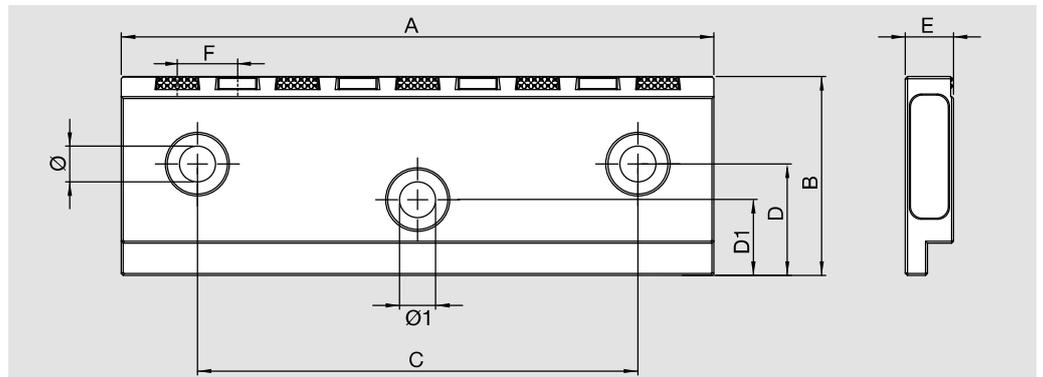

Check the dimensions of your jaws before purchasing

code	type	A mm	B mm	C mm	D mm	D1 mm	E mm	Ø mm	Ø1 mm	H parall.	F mm	n. inserts
58452119	ALLMATIC - T-REX / TITAN	124,4	39,5	88	12,3	18	12	7	11	36,5	14	9
58452129	GRESSEL/WNT/SCHUNK/FRESMAK/VP-N	125	40	80	15	-	12	9	-	36,5	14	9
58452139	OML - VISE POWER	130	52	90	25	-	12	11	-	49	14	9
58452149	HILMA	125	45	80	14	-	12	9	-	42	14	9
58452159	OML - TC 110 mm	106	40	80	23	-	12	7	-	37	15	7
58452219	OML - TC/MC 150 mm	148	50	110	28	-	12	9	-	47	15	9
58452229	KURT 6"	152	44,1	98,4	23,6	-	18,4	13,5	-	35	15,875	9
58452319	ALLMATIC - T-REX / TITAN	160	49,8	88	12,3	20	12	7	11	47	14	11
58452329	GRESSEL/WNT/SCHUNK/FRESMAK	160	50	100	20	-	12	11	-	47	14	11
58452339	OML - VISE POWER	160	55	90	25	-	12	11	-	52	14	11
58452349	HILMA	160	54	100	17	-	12	11	-	51	14	11
58452419	OML - TC/MC 200 mm	196	70	130	49	-	18	9	-	67	15	13


Special jaws "All in one" upon request

STANDARD



Pair of jaws without tungsten carbide coating.

The set includes one pair of jaws, 1 pair of parallels (PP), 1 wrench TORX T9 and 1 kit of 10 screws.

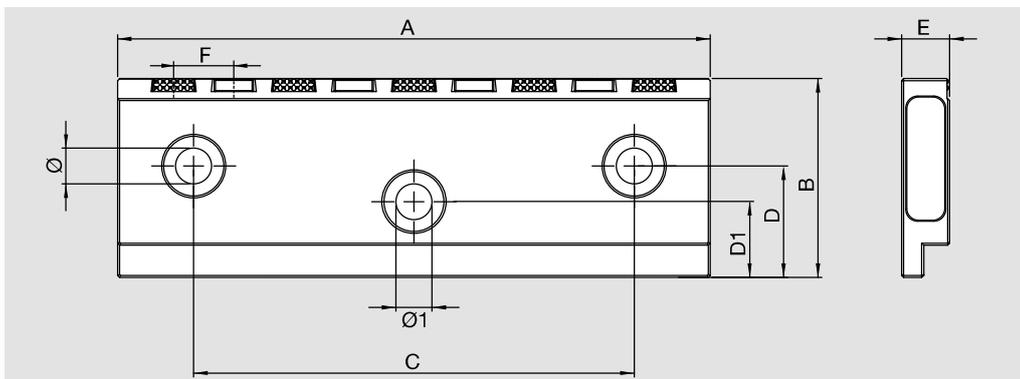

Check the dimensions of your jaws before purchasing


code	type	A mm	B mm	C mm	D mm	D1 mm	E mm	Ø mm	Ø1 mm	H parall.	F mm	n. inserts
58451119	ALLMATIC - T-REX / TITAN	124,4	39,5	88	12,3	18	12	7	11	36,5	14	9
58451129	GRESSEL/WNT/SCHUNK/FRESMAK/VP-N	125	40	80	15	-	12	9	-	36,5	14	9
58451139	OML - VISE POWER	130	52	90	25	-	12	11	-	49	14	9
58451149	HILMA	125	45	80	14	-	12	9	-	42	14	9
58451159	OML - TC 110 mm	106	40	80	23	-	12	7	-	37	15	7
58451219	OML - TC/MC 150 mm	148	50	110	28	-	12	9	-	47	15	9
58451229	KURT 6"	152	44,1	98,4	23,6	-	18,4	13,5	-	35	15,875	9
58451319	ALLMATIC - T-REX / TITAN	160	49,8	88	12,3	20	12	7	11	47	14	11
58451329	GRESSEL/WNT/SCHUNK/FRESMAK	160	50	100	20	-	12	11	-	47	14	11
58451339	OML - VISE POWER	160	55	90	25	-	12	11	-	52	14	11
58451349	HILMA	160	54	100	17	-	12	11	-	51	14	11
58451419	OML - TC/MC 200 mm	196	70	130	49	-	18	9	-	67	15	13

Special jaws "All in one" upon request

STANDARD



code	type
58451519	OML - GENIUS


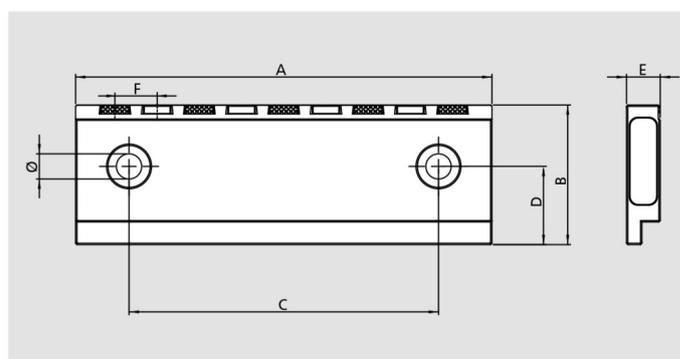


Pair of jaws without tungsten carbide coating.

The set includes one pair of jaws, 1 pair of parallels (H35 thickness 6 mm), 1 wrench TORX T9 and 1 kit of 10 screws.

code	type	A mm	B mm	C mm	D mm	E mm	Ø mm	H parall. mm	F mm	n. inserts
50240520	OML - TC/MC 150 mm	148	50	110	28	12	9	47	15	9

STARTER KIT

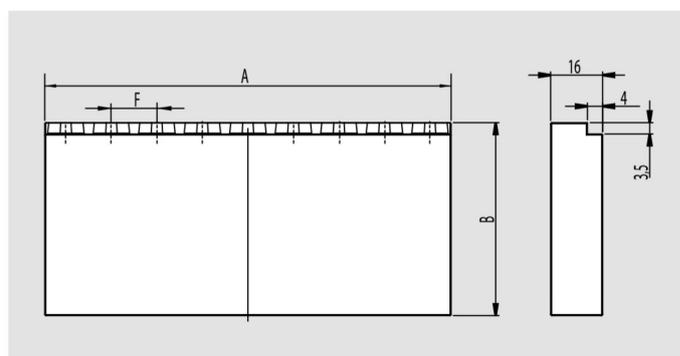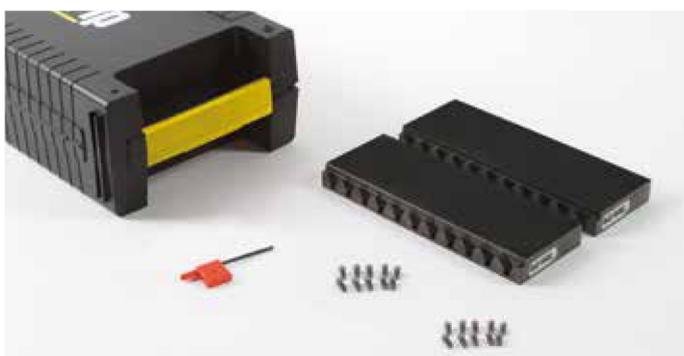

Pair of jaws.


The set includes one pair of jaws, 1 wrench TORX T9 and 1 kit of 10 screws

code	A mm	B mm	F mm	n. inserts
58453119	125	59	14	9
58453319	160	59	14	11
58453419	200	70	15	13


SINTERGRIP



SinterGrip inserts. The set includes n. 10 inserts



code	description
58450119	Set of 10 SinterGrip inserts STD for steel



code	description
58450129	Set of 10 SinterGrip inserts HRC for hardened steel / titanium until 50-54 HRC



code	description
58450139	Set of 10 SinterGrip inserts for ALU


ACCESSORIES



code	description
58450219	Kit 10VTX30 x inserts SINTERGRIP



code	description
58450320	Wrench TORX T9



code	description
58450410	Special cutting tool D3




code	description
58450519	Kit 10 protection inserts in aluminum



Universal



For OML vises TC/MC

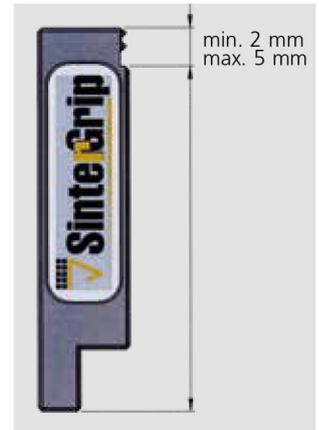

min. 2 mm
max. 5 mm

Quick change modular parallels for OML vises TC/MC


The set includes n. 6 pairs of parallels

2nd Op. No need to disassemble the inserts

code	type	A mm	B mm	C mm
58459216	OML TC/MC 150 mm	146	20/25/30/35/45*/48**	3
58459416	OML TC/MC 200 mm	196	25/35/45/55/65*/68**	3

* SinterGrip clamping surface 5 mm

** SinterGrip clamping surface 2 mm

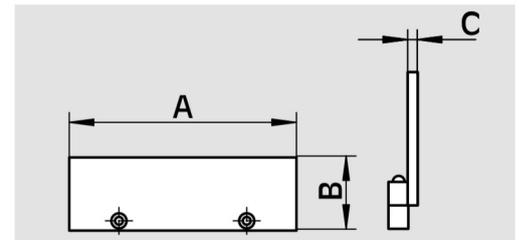


UNIVERSAL quick change modular parallels

The set includes n. 6 pairs of parallels

code	type	A mm	B mm	C mm
58459116	ALLMATIC GRESSEL/WNT/SCHUNK/FRESMAK	124	15/20/25/30/35*/37,5**	4
58459136	WISE POWER	124	15/20/25/30/37,5*/50**	4
58459146	HILMA	124	15/20/25/30/40*/43**	4
58459226	KURT 6"	149	15/20/25/30/39*/42**	4
58459236	OML - LC / GERARDI 150 mm	149	15/20/25/30/58*/61**	4
58459316	ALLMATIC GRESSEL/WNT/SCHUNK/FRESMAK	159	15/25/35/40/45*/48**	4
58459336	WISE POWER	159	15/25/35/40/50*/53**	4
58459346	HILMA	159	15/25/35/40/49*/52**	4

* SinterGrip clamping surface 5 mm

** SinterGrip clamping surface 2 mm

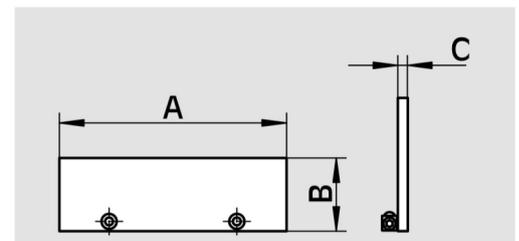

Order example for special executions

- 58450410 - cutting tool D3
- 58450119 - set 10 inserts STD
- 58450219 - set 10 screws VTX30



Order example for jaws


- 58452219 - pair of jaws All in One
- 58450119 - set 10 inserts STD
- 58450519 - kit 10 protection inserts





SinterGrip

The New Choice

Application examples

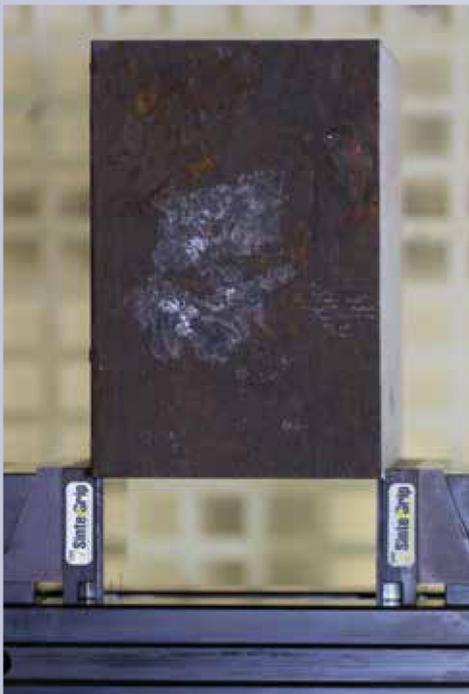

Application examples

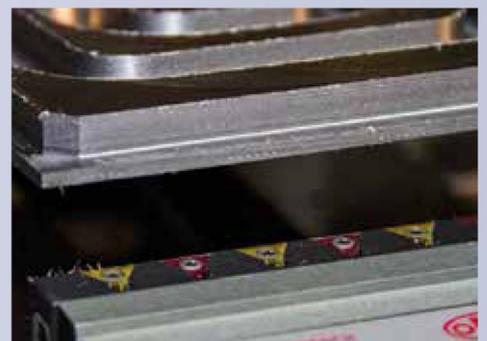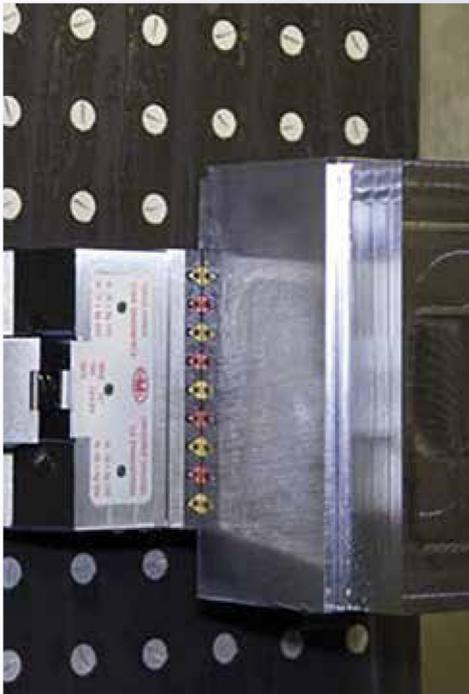



TCI



MCI



CV



CV-S



FMS



SINTERGRIP



APS



CLAK SYSTEM



GENIUS




CAM SYSTEM



HOLDING CLAMPS



VARI CLAMP



JAWS



SINTEX



FAST CLAMPS



TWIN VISE



IMG



TDM



OFFICINA MECCANICA LOMBARDA S.r.l.

Viale dell'Industria 6 - 27020 Trivolzio (PV) ITALY
Tel. +39 0382 93 00 00

E-mail > omlspa@omlspa.it
Web > www.omlspa.it