

palbit 

13118

HEXA FEED

Cut More, Spend Less

MILLING

Hifeed



SINCE 1916

HEXAFEED 13118

Negative solution for maximizing performance.

Power, Stability and
Productivity in high-feed
machining.

**When performance, economy and versatility must
come together - HEXAFEED 13118 delivers.**

The HEXAFEED 13118 is engineered for stability and reliability in the most demanding high-feed applications. Its negative insert geometry delivers six cutting edges per insert, maximizing performance and significantly reducing cost-per-edge - making it a truly economical solution for high-feed milling operations.

The robust insert design withstands high cutting loads and demanding conditions, including cavity machining and ramping, while maintaining stable and predictable cutting behavior throughout the tool's life.

Designed to machine a broad range of workpiece materials — from steels to superalloys - the HEXAFEED 13118 adapts perfectly to your production needs to your production needs without compromise.



HEXAFEED 13118

The HEXAFEED 13118 cutter body has been engineered to ensure efficient chip evacuation, stable cutting conditions and reliable insert positioning. Each design feature is optimized to enhance performance in high feed applications, particularly in demanding operations such as cavity machining and ramping.

Top relief features

to prevent chip recutting and improve chip evacuation

Optimized chip evacuation

channels and insert pockets for improved chip flow

Close pitch cutter configuration


available for increased productivity

Optimized pocket design

with increased contact area for precise seating and robust clamping

Concave cutter body

for improved chip evacuation and reduced interference in cavities

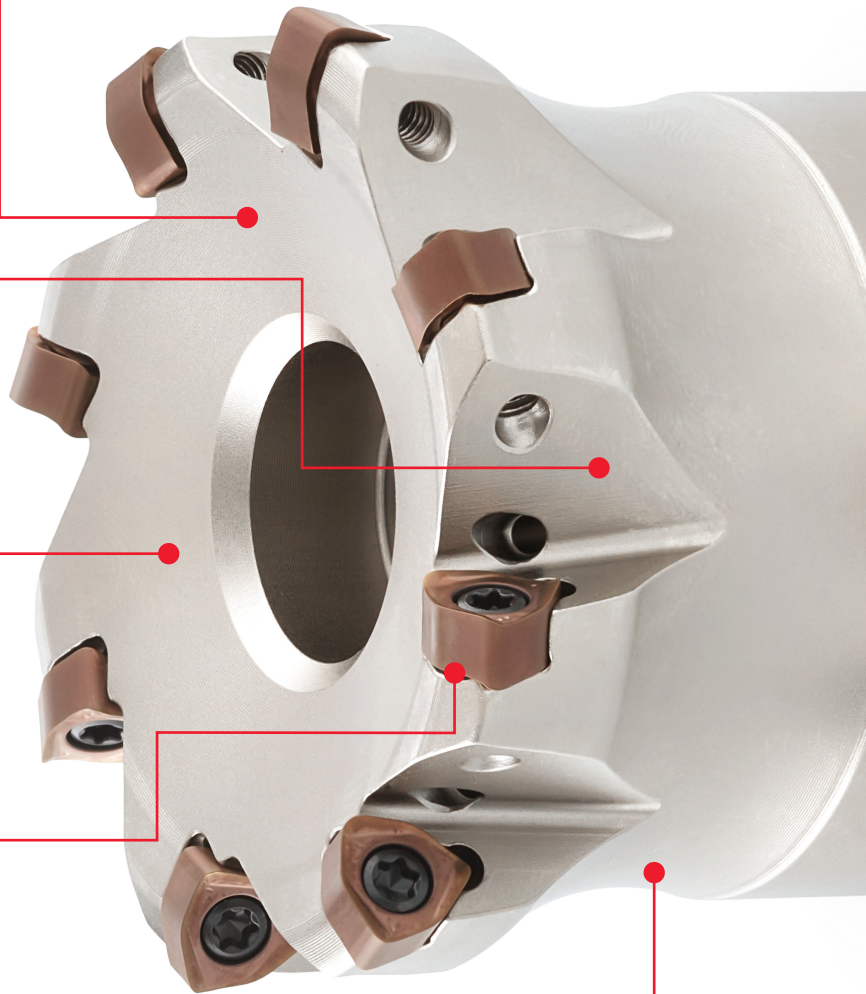

OPERATIONS



Facing



Profiling



Copying



Ramp Down



Shouldering



Pocket Milling



Slotting


More Edges, Less Cost!

HEXAFEED 13118 is designed to support efficient high feed machining



CHIPBREAKERS

The HEXAFEED 13118 insert combines dedicated chipbreaker geometries with an optimized cutting edge design to ensure controlled cutting action, effective chip management and stable performance across a wide range of materials.




MP Geometry **P** **K**

Designed for efficient material removal, this geometry combines a reinforced cutting edge with a negative profile to ensure controlled cutting action, reduced load on the tool and consistent performance.

M **S** MS Geometry

Developed for demanding materials, this geometry prioritizes cutting stability and edge integrity, limiting burr formation under higher thermal and mechanical loads.



01

- Curved cutting edge enabling a controlled entry angle and gradual load distribution during engagement mechanical loads.
- Locally positive lead geometry for smoother cutting action and reduced cutting forces.

02

- Negative land in the chipbreaker reinforcing the cutting edge for improved stability and controlled chip formation.
- Inclined curved chipbreaker surfaces directing chips towards the tool axis to minimize surface scratches.

HEXAFEED 13118


In today's highly demanding machining environment, productivity alone is no longer enough—cost efficiency is critical. The PALBIT HEXAFEED 13118 is designed to support efficient high feed machining by combining stable cutting conditions with a negative insert geometry, providing a cost-effective solution for high-volume machining applications.

Featuring a double-sided insert with six cutting edges, HEXAFEED significantly reduces cost per edge while maintaining consistent machining performance. This optimized multi-edge concept, combined with stable process behavior and high material removal rates, positions the HEXAFEED 13118 as a strong solution for high-volume roughing.

KEY BENEFITS

- Six cutting edges for maximum cost efficiency per insert;
- Chipbreakers for steel, stainless steel, cast iron and HRSA;
- Ramping capability up to 4° for efficient and versatile machining;
- 18° entering angle for distributed cutting forces and improved stability;
- High material removal rates for increased productivity;
- Coarse and close pitch cutter designs to match machine capability and application requirements;



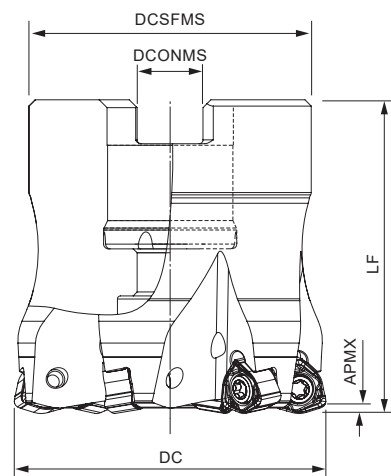


Arbor Mounting

KAPR=18° | GAMP=-9° | RP=1,6

Order code Código	Reference Referência Referencia	CICT	Dimensions Dimensões Dimensiones (mm)				WT	Specifications		Insert	Stock
			DC	DCONMS	DCSFMS	LF		Arbor Type	APMX (mm)		
181229500	032A13118-04-09-016040	4	32	16	30	40	0,140	A	1,00	WNKU 06...	○
181223800	032A13118-05-09-016040	5	32	16	30	40	0,155	A	1,00	WNKU 06...	⊗
181229600	040A13118-05-09-016040	5	40	16	36	40	0,264	A	1,00	WNKU 06...	○
181223900	040A13118-06-09-016040	6	40	16	36	40	0,279	A	1,00	WNKU 06...	⊗
181229700	050A13118-06-09-022040	6	50	22	42	40	0,361	A	1,00	WNKU 06...	○
181224000	050A13118-08-09-022040	8	50	22	42	40	0,391	A	1,00	WNKU 06...	⊗
181229800	052A13118-06-09-022040	6	52	22	42	40	0,373	A	1,00	WNKU 06...	○
181219900	052A13118-08-09-022040	8	52	22	42	40	0,403	A	1,00	WNKU 06...	⊗
181229900	063A13118-06-09-022040	6	63	22	48	40	0,615	A	1,00	WNKU 06...	○
181224100	063A13118-08-09-022040	8	63	22	48	40	0,645	A	1,00	WNKU 06...	⊗
181224200	080A13118-10-09-027050	10	80	27	60	50	1,295	A	1,00	WNKU 06...	⊗

⊗ Stock item | Produto de stock | Itens de stock

○ Available under request | Disponível sobre consulta | Disponible bajo consulta

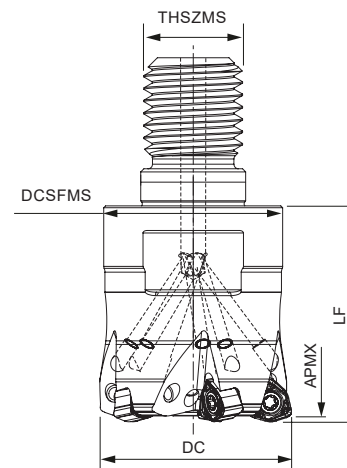

Threaded Coupling

KAPR=18° | GAMP=-9° | RP=1,6



Order code Código	Reference Referência Referencia	CICT	Dimensions Dimensões Dimensiones (mm)				WT	Specifications		Insert	Stock
			DC	THSZMS	DCSFMS	LF		APMX (mm)			
181224300	016R13118-02-09-M08025	2	16	M08	13	25	0,033	1,00	WNKU 06...	⊗	
181219800	020R13118-03-09-M10028	3	20	M10	18	28	0,098	1,00	WNKU 06...	⊗	
181220000	025R13118-04-09-M12035	4	25	M12	21	35	0,090	1,00	WNKU 06...	⊗	
181218300	032R13118-05-09-M16035	5	32	M16	29	35	0,175	1,00	WNKU 06...	⊗	
181220100	035R13118-05-09-M16035	5	35	M16	29	35	0,185	1,00	WNKU 06...	⊗	
181230000	040R13118-05-09-M16035	5	40	M16	29	35	0,255	1,00	WNKU 06...	○	

⊗ Stock item | Produto de stock | Itens de stock

○ Available under request | Disponível sobre consulta | Disponible bajo consulta

HEXAFEED 13118

WNKU 06

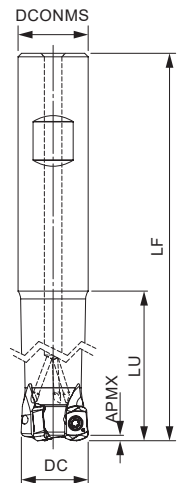


Weldon Shank

KAPR=18° | GAMP=-9° | RP=1,6

Order code Código	Reference Referência Referencia	CICT	Dimensions Dimensões Dimensiones (mm)				WT	Specifications	Insert	Stock
			DC	DCONMS	LF	LU		APMX (mm)		
181224400	016W13118-02-09-016100	2	16	16	100	30	0,167	1,00	WNKU 06...	☉
181224500	016W13118-02-09-016150	2	16	16	150	50	0,227	1,00	WNKU 06...	○
181224600	020W13118-03-09-020130	3	20	20	130	50	0,374	1,00	WNKU 06...	☉
181219700	020W13118-03-09-020160	3	20	20	160	90	0,330	1,00	WNKU 06...	☉
181224700	025W13118-04-09-025140	4	25	25	140	60	0,559	1,00	WNKU 06...	☉
181224800	025W13118-04-09-025180	4	25	25	180	100	0,619	1,00	WNKU 06...	○
181224900	032W13118-05-09-032150	5	32	32	150	60	1,040	1,00	WNKU 06...	☉
181225000	032W13118-05-09-032200	5	32	32	200	120	1,100	1,00	WNKU 06...	○

☉ Stock item | Produto de stock | Itens de stock

○ Available under request | Disponível sobre consulta | Disponible bajo consulta

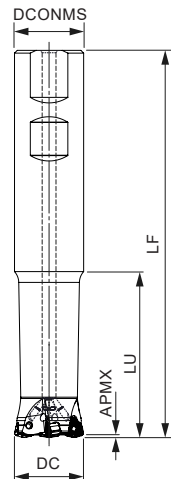

Cylindrical Shank

KAPR=18° | GAMP=-9° | RP=1,6

Order code Código	Reference Referência Referencia	CICT	Dimensions Dimensões Dimensiones (mm)				WT	Specifications	Insert	Stock
			DC	DCONMS	LF	LU		APMX (mm)		
181225100	016E13118-02-09-016100	2	16	16	100	30	0,195	1,00	WNKU 06...	○
181225200	016E13118-02-09-016150	2	16	16	150	50	0,255	1,00	WNKU 06...	☉
181225300	020E13118-03-09-020130	3	20	20	130	50	0,368	1,00	WNKU 06...	○
181225400	020E13118-03-09-020160	3	20	20	160	80	0,428	1,00	WNKU 06...	☉
181225500	025E13118-04-09-025140	4	25	25	140	60	0,676	1,00	WNKU 06...	○
181225600	025E13118-04-09-025180	4	25	25	180	100	0,736	1,00	WNKU 06...	☉
181225700	032E13118-05-09-032150	5	32	32	150	70	1,341	1,00	WNKU 06...	○
181225800	032E13118-05-09-032200	5	32	32	200	120	1,401	1,00	WNKU 06...	☉


☉ Stock item | Produto de stock | Itens de stock

○ Available under request | Disponível sobre consulta | Disponible bajo consulta


WNKU 06T3... Inserts | Pastilhas | Plaquetas



WNKU-MP



WNKU-MS




WNKU-MP | MS


		P		M		K	S		Dimensions Dimensões Dimensiones (mm)		
		PVD		PVD		PVD	PVD				
(1)	(2) Grade code	T1	P4	X9	3N	T1	X9	3N	IC	S	RE
Geometry code	ISO Reference	PHP920	PHP930	PHH930	PHF535	PHP920	PHH930	PHF535			
1113644	WNKU 060308-MP	Ⓢ	Ⓢ			Ⓢ			6,20	3,50	0,80
1113657	WNKU 060308-MS			Ⓢ	Ⓢ		Ⓢ	Ⓢ	6,20	3,50	0,80

Ⓢ First choice | Primeira opção | 1ª opción Ⓢ Stock item | Produto de stock | Itens de stock Insert order code = (1) Geometry Code + (2) Grade Code

SPARE PARTS Acessórios | Repuestos

Cutter DC	Insert Screw	Key (Torx)	Order separately	
			Key (Torx - Nm)	Torque Value
A13118 - 32-80	P0250704	XT08	DT0812	1,20
R13118 - 16-40	P0250704	XT08	DT0812	1,20
W13118 - 16-32	P0250704	XT08	DT0812	1,20
E13118 - 16-32	P0250704	XT08	DT0812	1,20

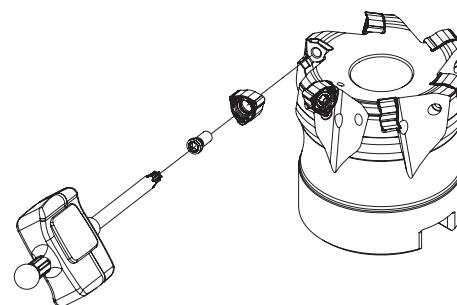



GRADES SELECTION GUIDE Guia para selecção de graus | Tabla para selección de calidades

ISO	PSM	Material	HB (Brinell)	Grades			
				← Wear Resistance			Toughness →
				PHP920	PHP930	PHH930	PHF535
P	1	Unalloyed Steel	125-220	☉	☉		
	2	Low-Alloyed Steel	220-280	☉	☉		
	3	High-Alloyed Steel	280-380	☉	☉		
M	4	SS - Ferritic / Martensitic	200-330			☉	☉
	5	SS - Austenitic	200-330			☉	☉
	6	SS - Austenitic-ferritic (Duplex)	230-260			☉	☉
K	7	Malleable Cast Iron	130-230	☉			
	8	Grey Cast Iron	180-245	☉			
	9	Nodular Cast iron	160-250	☉			
S	11	Heat Resistant Super Alloys	200-320			☉	☉

☉ Good Conditions
 ☉ Average Conditions
 ☉ Difficult Conditions

RECOMMENDED CUTTING CONDITIONS Condições de corte recomendadas | Condiciones de corte recomendables

ISO	PSM	Material	HB (Brinell)	Vc (m/min)				Feed fz (mm/t)	
				← Wear Resistance			Toughness →	WNKU 06...-MP	WNKU 06...-MS
				PHP920	PHP930	PHH930	PHF535		
P	1	Unalloyed Steel	125-220	180-250	160-230	-	-	0,50-1,50	-
	2	Low-Alloyed Steel	220-280	170-210	150-190	-	-	0,50-1,50	-
	3	High-Alloyed Steel	280-380	160-200	140-180	-	-	0,50-1,50	-
M	4	SS - Ferritic / Martensitic	200-330	-	-	150-210	170-280	-	0,50-1,30
	5	SS - Austenitic	200-330	-	-	120-200	160-280	-	0,50-1,30
	6	SS - Austenitic-ferritic (Duplex)	230-260	-	-	100-180	150-260	-	0,50-1,30
K	7	Malleable Cast Iron	130-230	170-300	-	-	-	0,50-1,50	-
	8	Grey Cast Iron	180-245	150-250	-	-	-	0,50-1,50	-
	9	Nodular Cast iron	160-250	90-210	-	-	-	0,50-1,50	-
S	11	Heat Resistant Super Alloys	200-320	-	-	30-110	30-150	-	0,40-0,80

(Note 1) Cutting conditions $a_e/D_c=70\%$.

(Note 2) It's possible to occur vibrations in certain cases. Please reduce depth of cut and / or reduce cutting conditions in following cases:

- When using long shank;
- When using long tool overhang with arbor type;
- When application has poor clamping rigidity or when using a low rigidity machine.


(Note 3) When using $D_c=16\text{mm}$ apply 70% or less feed (fz) from the table.

CHIP BREAKER SELECTION GUIDE Guia para aplicações do quebra-apanas | Guía para aplicación del rompevirutas

ISO	PSM	Material	HB (Brinell)	Chip breaker application	
				1st choice	Difficult Operations
P	1	Unalloyed Steel	125-220	WNKU 06... -MP	-
	2	Low-Alloyed Steel	220-280	WNKU 06... -MP	-
	3	High-Alloyed Steel	280-380	WNKU 06... -MP	-
M	4	SS - Ferritic / Martensitic	200-330	WNKU 06... -MS	-
	5	SS - Austenitic	200-330	WNKU 06... -MS	-
	6	SS - Austenitic-ferritic (Duplex)	230-260	WNKU 06... -MS	-
K	7	Malleable Cast Iron	130-230	WNKU 06... -MP	-
	8	Grey Cast Iron	180-245	WNKU 06... -MP	-
	9	Nodular Cast iron	160-250	WNKU 06... -MP	-
S	11	Heat Resistant Super Alloys	200-320	WNKU 06... -MS	-


PROGRAMMING DATA Dados para programação | Datos para la programación

Insert	Programming Data			
	Rp	X	b	ae
WNKU 06T3...	1,6	0,48	3,4	3,2

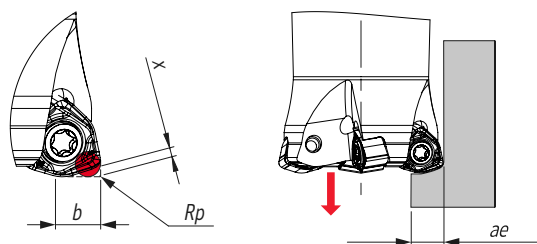


PLUNGING Mergulho | Plunge

L ≤ 3DC	L > 3DC	S max.
fz (mm/t)		
0,08-0,15	0,05 - 0,10	$S_{max} = \sqrt{DC \cdot Dr - Dr^2}$




S max and DR corresponding cutting diameter DC (mm)										
DR (mm)	DC (mm)									
	16	20	25	32	35	40	50	52	63	80
1	3,9	4,4	4,9	5,6	5,8	6,2	7,0	7,1	7,9	8,9
2	5,3	6,0	6,8	7,7	8,1	8,7	9,8	10,0	11,0	12,5
3	6,2	7,1	8,1	9,3	9,8	10,5	11,9	12,1	13,4	15,2

Note: Recommended for $L \leq 4 Dc$ for extra long tool this step and side cut must be reduced.




RAMPING AND HELICAL INTERPOLATION

Descida em rampa e interpolação helicoidal | Bajada en rampa e interpolación circular

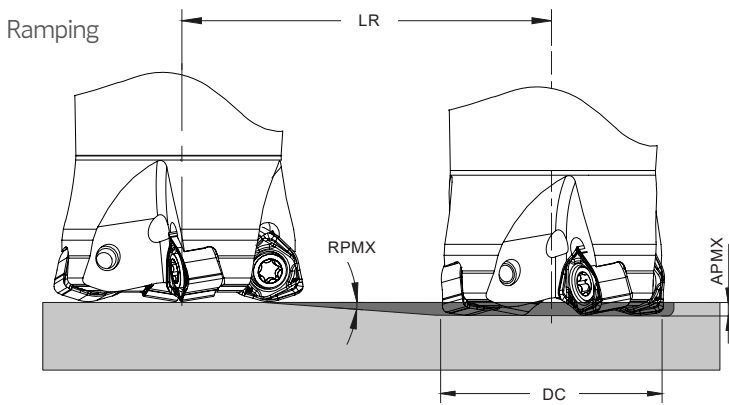

Helical Interpolation

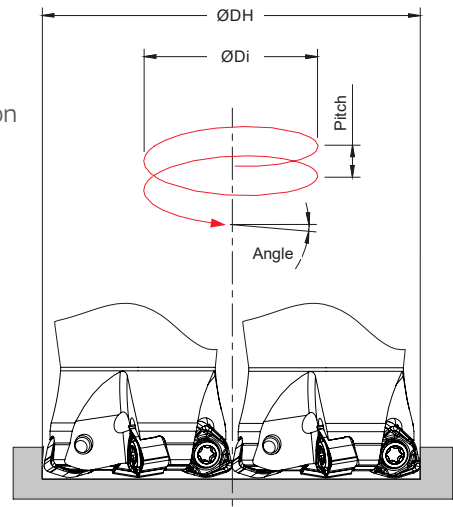

$$\text{ØDi} = \text{ØDH} - \text{DC}$$

DC	Ramping			Helical Interpolation			
	RPMX	APMX	Min LR	ØDHmin	ØDHmax	Max Pitch/Rev.	Max Angle (°)
16	4,0	0,9	12,9	21,3	-	1,00	3,10
20	3,1	0,9	16,6	-	32,0	1,00	1,10
				26,7	40,0	1,00	0,50
25	2,0	0,9	25,8	33,3	-	1,00	2,10
				-	50,0	1,00	0,40
32	1,4	0,9	36,8	42,7	-	1,00	1,70
				-	64,0	1,00	0,40
35	1,4	0,9	36,8	46,7	-	1,00	1,50
				-	70,0	1,00	0,40
40	1,0	0,9	54,3	53,3	-	1,00	1,40
				-	80,0	1,00	0,40
50	0,8	0,9	64,5	66,7	-	1,00	1,10
				-	100,0	1,00	0,35
52	0,8	0,9	64,5	70,7	-	1,00	1,00
				-	104,0	1,00	0,35
63	0,5	0,9	103,1	92,7	-	1,00	0,60
				-	126,0	1,00	0,30
80	0,4	0,9	128,9	126,7	-	1,00	0,40
				-	160,0	1,00	0,20

Note: During helical interpolation do not exceed APMX.

(*) Down cutting is recommended, tool pass rotation should be counter-clockwise.

(*) In case of ramping and helical interpolation, apply 70% or less feed (fz) from recommended cutting conditions table.



WORKPIECE MATERIAL
Steel 40 CrMnNiMo 8-6-4 | P20 (33 HRC)

COOLANT
Air

OPERATION
Facing

CUTTING SPEED
160 m/min


FEED / TOOTH
0.6 mm/t

DEPTH OF CUT
0.8 mm

STEPOVER
60%

TEST DURATION
300 min

CHIPBREAKER -MP vs Competitor

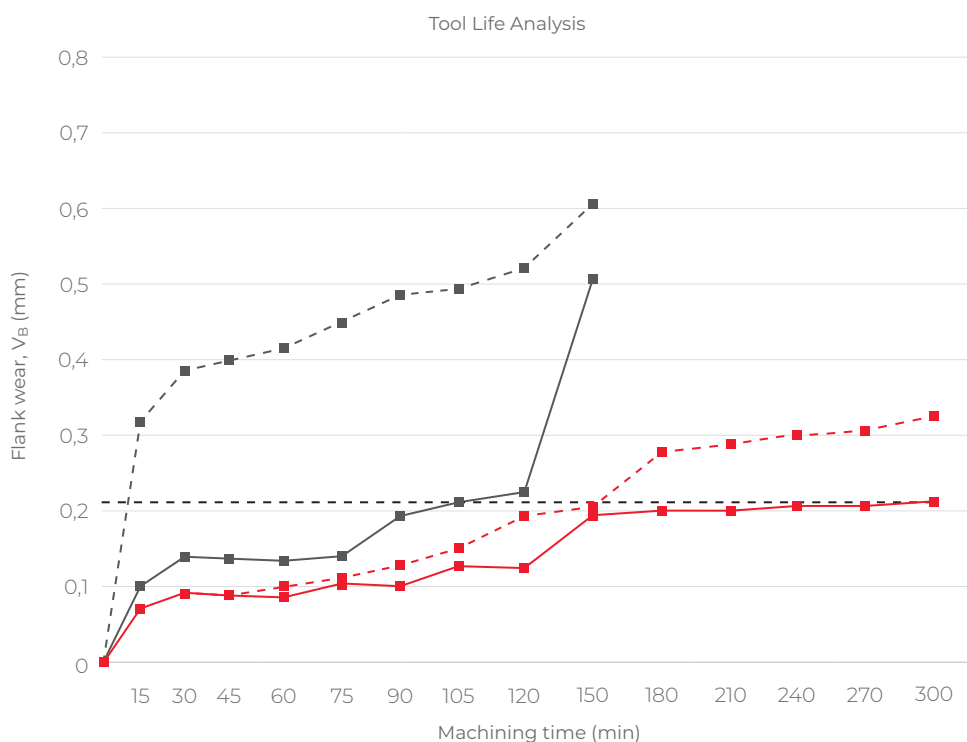

+180%
TOOL LIFE

AT 150 MIN

Palbit flank: 0.18 mm
Competitor flank: 0.51 mm (V_{Bmax})

AT 300 MIN

Palbit flank: 0.21 mm
Competitor flank: -

Toolholder
025R13118-05-09-M12035
Insert
WNKU 060308-MP PHP920

- Flank Palbit
- - - ■ - Rake Palbit
- Flank Competitor
- - - ■ - Rake Competitor

Note: Comparison made at the maximum flank wear level reached by the Palbit tool, due to the extended machining time of the test (V_B = 0.21 mm).

Palbit WNKU



Tool wear after 150 minutes of machining



Competitor equivalent



Tool wear after 150 minutes of machining



Tool wear after 300 minutes of machining



TEST REPORT - WNKU 06-MS Relatório de Teste - WNKU 06-MS | Informe de Prueba - WNKU 06-MS



WORKPIECE MATERIAL

Stainless Steel X 5 CrNiMo 17 12 2 | 316L (45HRC)

COOLANT

Air

OPERATION

Facing

CUTTING SPEED

170 m/min

FEED / TOOTH

0.9 mm/t

DEPTH OF CUT

0.6 mm


STEPOVER

60%

TEST DURATION

90 min

CHIPBREAKER -MS vs Competitor

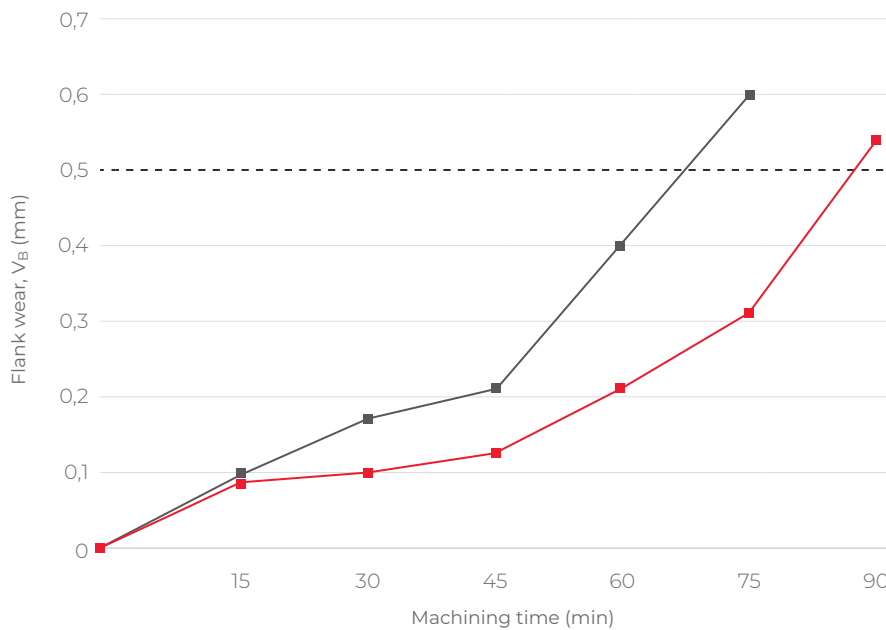

+30%
TOOL LIFE

AT 75 MIN

Palbit flank **0.31 mm**
Competitor flank **0.60 mm**
(V_{Bmax})

AT 90 MIN

Palbit flank **0.53 mm**
Competitor flank **-**

Toolholder

032R13118-05-09-M16035


Insert

WNKU 060308-MS PHF535


—■ Flank Palbit
—■ Flank Competitor

Note: Comparison made according to ISO 8688 standard tool life criterion (V_{Bmax} = 0.5 mm).


Palbit WNKU




Tool wear after 75 minutes of machining




Competitor equivalent



Tool wear after 75 minutes of machining



Tool wear after 90 minutes of machining



WORKPIECE MATERIAL
Inconel 718 (40 HRC)

COOLANT
Air

OPERATION
Facing

CUTTING SPEED
50 m/min


FEED / TOOTH
0.5 mm/t

DEPTH OF CUT
0.4 mm

STEPOVER
60%

TEST DURATION
30 min

CHIPBREAKER -MS for Superalloys

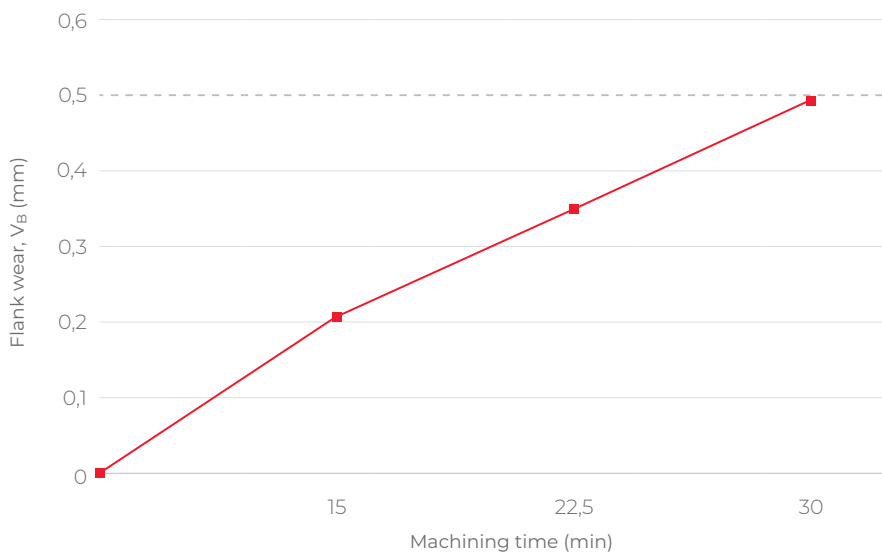

AT 30 MIN

Palbit flank

0.48 mm

Toolholder

32R13118-05-09-M16035


Insert

WNKU 060308-MS PHF535

—■ Flank Palbit

Note: Comparison made according to ISO 8688 standard tool life criterion (V_B max = 0.5 mm).

Palbit WNKU

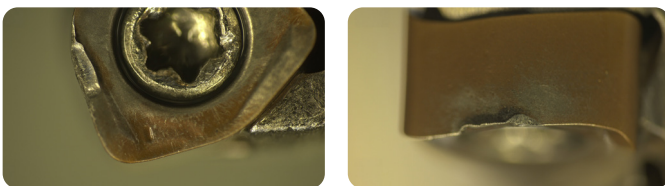


Tool wear after 30 minutes of machining

Why the -MS Chipbreaker for Superalloys?

When machining Heat Resistant Super Alloys (HRSA), cutting stability and edge integrity are essential. The **WNKU 06-MS** geometry addresses these challenges by prioritizing resistance to burr formation under high thermal and mechanical loads.

HEXAFEED 13118

More Edges, **Less Cost.**

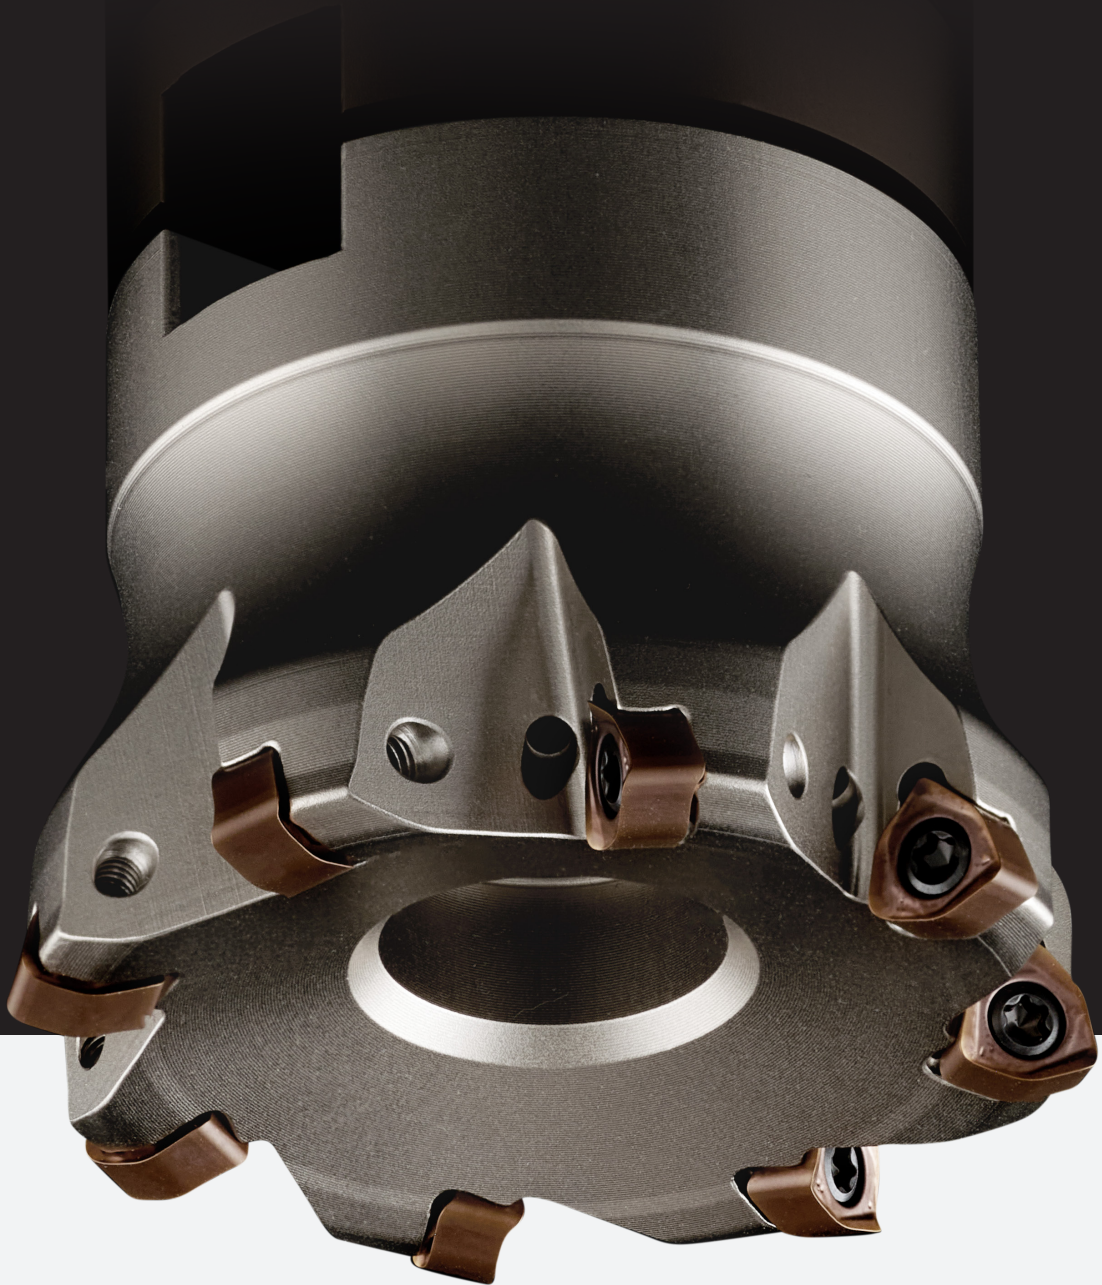

palbit 

13118

HEXAFEED

Cut more, spend less



Check the QrCode for more information



ZIBTRPRO
tehnologija obdelave · vpenjalni sistemi



HEADQUARTERS

PALBIT. S.A.

T (+351) 234 540 300 | F (+351) 234 540 301

palbit@palbit.pt | www.palbit.pt

Branch office

PALBIT México, S de RL de CV

T (+52) 5555 454 543 | F (+52) 5552 509 190

info@palbit.com.mx | www.palbit.pt/mx

Branch office

PALBIT Brasil

T (+55) 011 25 343 648

palbit@palbit.com.br | www.palbit.pt/br