


electronics

Inductive Coupling Systems | Sensoric | Digital Products | Measuring Systems | Connectivity

WIRELESS TECHNOLOGIES

www.smw-electronics.com

SMW-AUTOBLOK worldwide

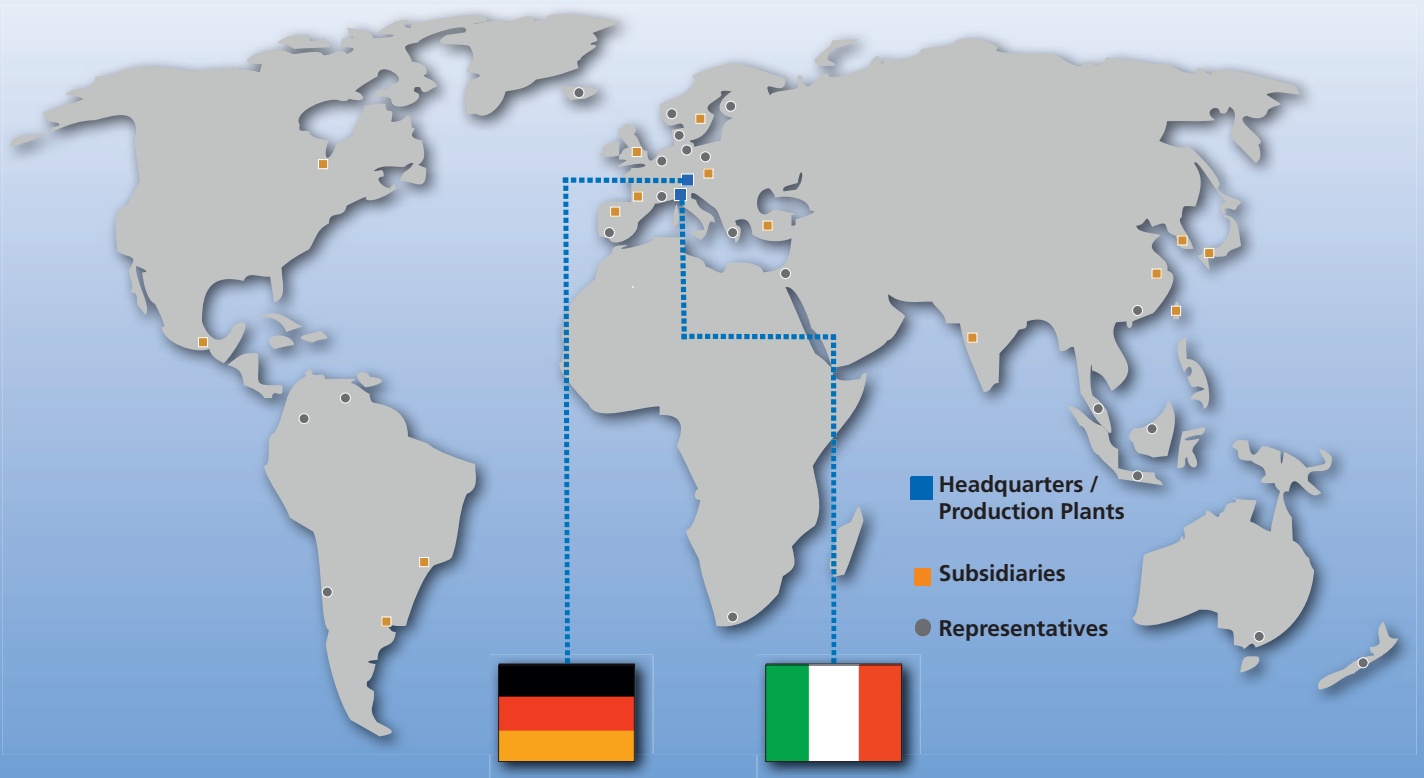

SMW-AUTOBLOK manufacturing plant Meckenbeuren
Development | Manufacturing | Sales | Service | Support



SMW-electronics Meckenbeuren plant Meckenbeuren
Development | Manufacturing | Sales | Service | Support




SMW-AUTOBLOK technology and logistics center Meckenbeuren

Visit our website: www.smw-electronics.com

Market segements



Automotive

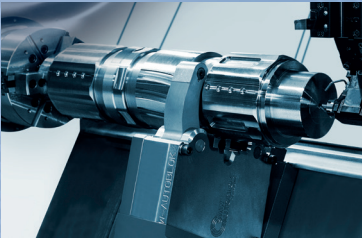

Industrial Equipment




OCTG




Aerospace




Off Highway

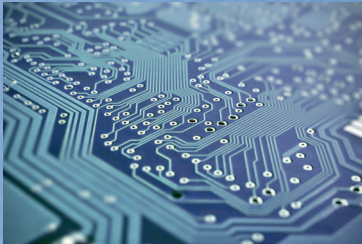

Electronics

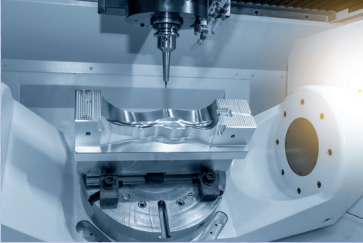

Mold Industry

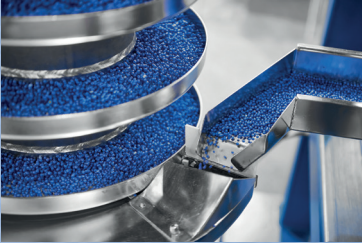

Plastics



Automation and Handling



**Mining Industry
Cranes**



Robots / Cobots




Medical Technology



Intralogistics



Packaging Industry

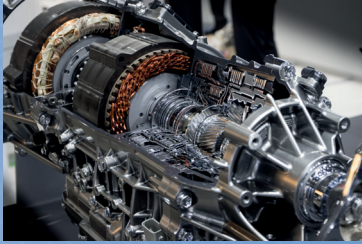

Powertrain

Product range



Page 10

Inductive Coupling System F100 Ethernet

Axial coupler

- Contact free transmission of energy and signals
- High transmission of energy up to 75 W
- Transmission of signals Ethernet 100 Base-T
- Diameter 100 mm / through-hole 50 mm



Page 24

Inductive Coupling System F120

Axial coupler

- Contact free transmission of energy
- Transmission of energy 120 W
- No signal transmission



Page 12

Inductive Coupling System F100-2IOL

Axial coupler

- Contact free transmission of energy and signals
- High transmission of energy up to 75 W
- Transmission of signals: 2x IO-Link (COM1, COM2, COM3)
- Diameter: 180 mm / through-hole: 85 mm



Page 26

Inductive Coupling System M12-2

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 1 W
- Transmission of signals 2 x digital
- Mounting M12 x 1



Page 14

Inductive Coupling System F180 Ethernet

Axial coupler

- Contact free transmission of energy and signals
- High transmission of energy up to 400 W
- Transmission of signals Ethernet 100 Base-T
- Diameter 180 mm / through-hole 85 mm




Page 28

Inductive Coupling System M18-4

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 1.2 W
- Transmission of signals 4 x digital
- Mounting M18 x 1



Page 16

Inductive Coupling System F280 CAN

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 1100 W
- Transmission of signals 2 x CAN-Bus, 2 x digital
- Diameter 280 mm



Page 30

Inductive Coupling System M30-2

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 12 W
- Transmission of signals 2 x digital
- Mounting M30 x 1.5



Page 18

Inductive Coupling System F100/66-IOL

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 22 W
- Transmission of signals: IO-Link (COM1, COM2, COM3)
- Ideal for pallet change application



Page 32

Inductive Coupling System M30-8

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 12 W
- Transmission of signals 8 x digital
- Mounting M30 x 1.5



Page 20

Inductive Coupling System F60-4/4A

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 2.5 W
- Transmission of signals (4 x digital, 4 x analog 0 - 10 V)
- Base with mounting flange
- Diameter 60 mm / through-hole 36 mm



Page 34

Inductive Coupling System M30-IOL

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 12 W
- Transmission of signals: IO-Link (COM1 / COM2 / COM3)
- Mounting: M30 x 1.5



Page 22

Inductive Coupling System F60-4/4A

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 2.5 W
- Transmission of signals (4 x digital, 4 x analog 0 - 10 V)
- Diameter 60 mm / through-hole 36 mm



Page 36

Inductive Coupling System M30-4A

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 6 W
- Transmission of signals 4 x analog (4 - 20 mA/0 - 10 V)
- Mounting M30 x 1.5

Continuation
on the next page

Product range



Inductive Coupling System M30-8+8

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 12 W
- Transmission of signals 8 / 8 x digital (bidirectional)
- Mounting M30 x 1.5

Page 38



Mounting Brackets

Accessories

- Mounting brackets for inductive couplers M30, M18 und M12
- Simple mounting

Page 40



Inductive Coupling System

Individual solutions

- Individual customized adaptations
- Customizable geometry
- Energy and signal transmission depending on customer requirements

Page 41



LPS 4.0 14 IO

Linear Positioning System

- Inductive positioning system
- Output analog and IO-Link interface
- Measuring range = 14 mm

Page 44



LPS 4.0 48 IO

Linear Positioning System

- Inductive positioning system
- Output analog and IO-Link interface
- Measuring range = 48 mm

Page 45



LPS 4.0 80 IO

Linear Positioning System

- Inductive positioning system
- Output analog and IO-Link interface
- Measuring range = 80 mm

Page 46



LPS 4.0 120 IO

Linear Positioning System

- Inductive positioning system
- Output analog and IO-Link interface
- Measuring range = 120 mm

Page 47



USP 4.0 250

Ultrasonic Position Measuring System

- Non-contact distance measurement using Ultrasonic technology
- Large measuring range 25 - 250 mm
- State of the art ultrasonic
- Output signal analog 0 - 10 V/4 - 20 mA

Page 48




GFT-X 4.0

Multifunctional Gripping Force Tester

- Wireless grip force measuring
- Assistance systems APPs
- Tablet IP 67 protected
- Integrated software for clamping force / speed evaluation


Page 52



Digital Products

- App programming
- Cloud solutions
- PNP programming
- Monitoring and analysis software
- Software for mechatronic clamping systems

Page 54



Connectivity

Accessories

- IO-Link Hub 16 x digital IN/OUT
- IO-Link Hub 16 x digital IN
- Sensors / actuators connecting cable

Page 60



RFID

Accessories

- Write / read station
- Transponder ISO 15693

Page 62



Application Examples

- Inductive coupling systems
- LPS 4.0
- UPS 4.0


Page 64




Continuation from previous page

Inductive transmission of energy and signals

Contact free transmission of energy and signals via air gap

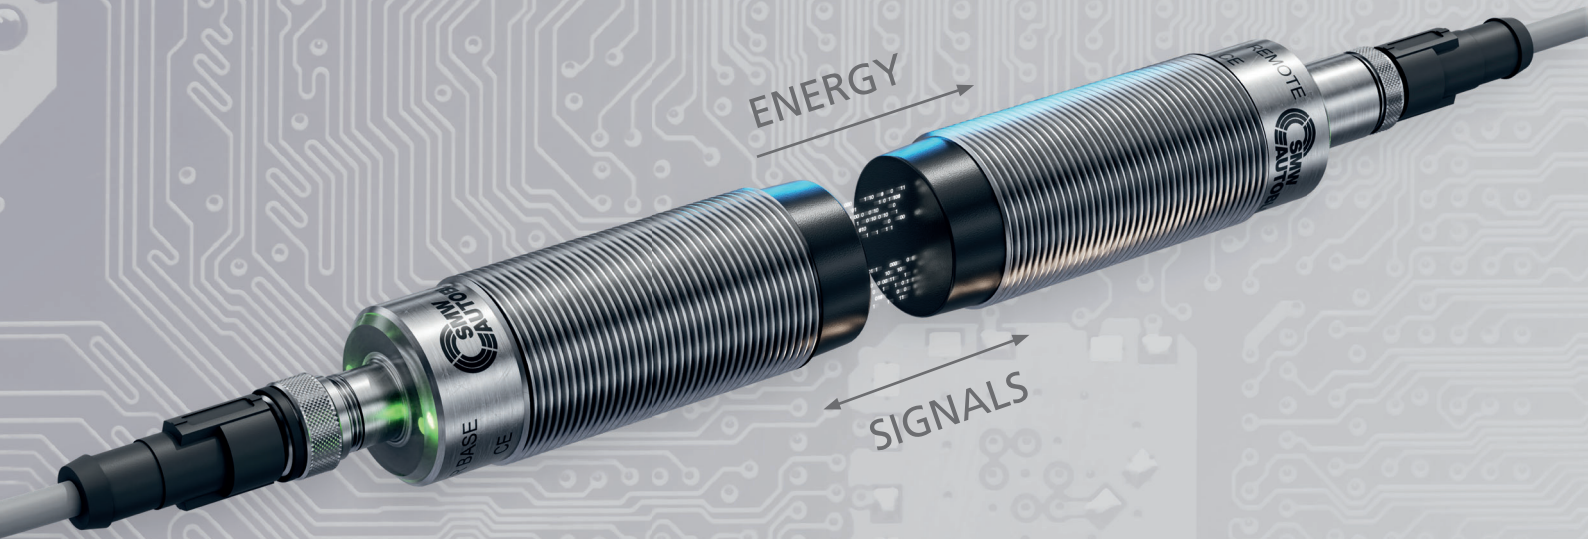

Benefits

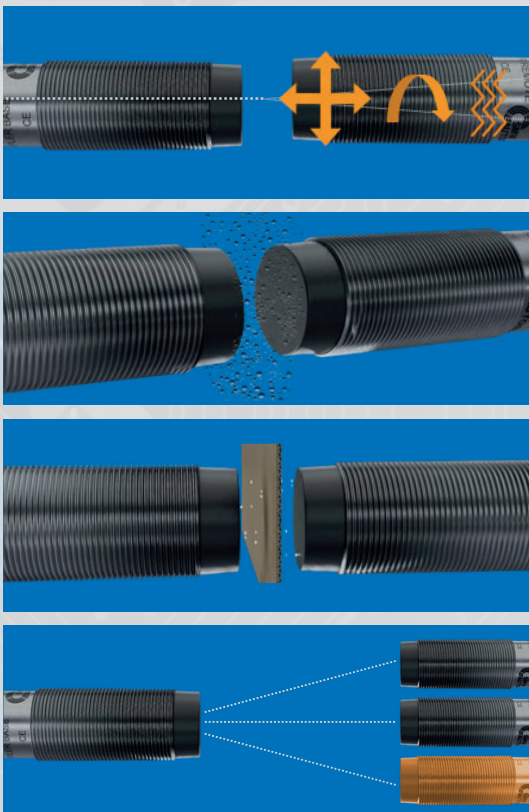

- Flexible installation due to the large transmission distance
- Safe transmission even when the mobile coupler rotates
- Also suitable for high speeds
- Insensitive to vibrations
- No cable breakage
- Safe transmission of signals
- Completely free from wear and maintenance
- Can be used in rough conditions and also for clean room applications
- Protected according to IP67
- Safe transmission even through non-metallic obstacles
- Dynamic Pairing: Base unit (stationary) can communicate with different remote units (mobile)








Our technical possibilities and designs of energy and signal transmission

- **Inductive energy transmission**
 - Up to 1100 W

- **Inductive signal transmission**
 - Analog signals (0 - 10 V / 4 - 20 mA)
 - Temperature signals (PT 100)
 - Digital switching PNP signals
 - Field bus (CAN or Profibus)
 - IO-Link (COM1, COM2, COM3)
 - Ethernet (compatible among others with PROFINET, Modbus, EtherNet/IP)

- **Hybrid systems**
 - Energy transmission via slip ring / contact pins
 - Inductive signal transmission

Examples of geometric design for inductive energy and signal transmission

| | | | | | | | |
|-----------------------------|---|---|---|---|--|---|---|
| |  |  |  |  |  |  |  |
| Transmission | Axial | Axial | Axial | Axial | Radial | Radial | Translational |
| Motion | Rotation / Linear | Rotation | Rotation | Rotation | Rotation | Rotation | Linear |
| Geometry | Cylinder (also cubic) | Disc | Ring | Ring segment / Ring | Segment / Ring | Ring / Ring | Cubic |
| Application examples | Palletizing, automation, mechanical engineering, tool monitoring, connector replacement | Mechanical engineering, mechatronics, collector ring replacement | Printing machines, robotics, collector ring replacement | Mechanical engineering, process technology | Packaging machines, centrifuges, process technology | Rotary indexing tables, packaging machines | Transport systems |

Blue: Stationary unit (base) **Orange:** Mobile unit (remote)




Application/customer benefits

- Contact free, safe transmission of energy and signals between moving / rotating and stationary components
- Application examples: Robotic (End of Arm Tooling), Automation, Mechanical engineering
- Substitution of slip ring / connector
- Dynamic Pairing
- Wear and maintenance free
- Protective functions: temperature monitoring, foreign object detection, reverse polarity protection
- Multi-level LED with good visibility

Technical features

- Diameter 100 mm / Through hole 50 mm
- Operating voltage 24 V / 6 A
- Transmission distance 0 - 4 mm
- Transmission of energy 24 V / 75 W
- Transmission of signals Ethernet 100 Base-T
- Transmission bandwidth: < 5 MBit/s
- Connections: M12 Ethernet (D-coded) / M12 Power (L-coded)
- Protection class: IP 67

Block diagram:

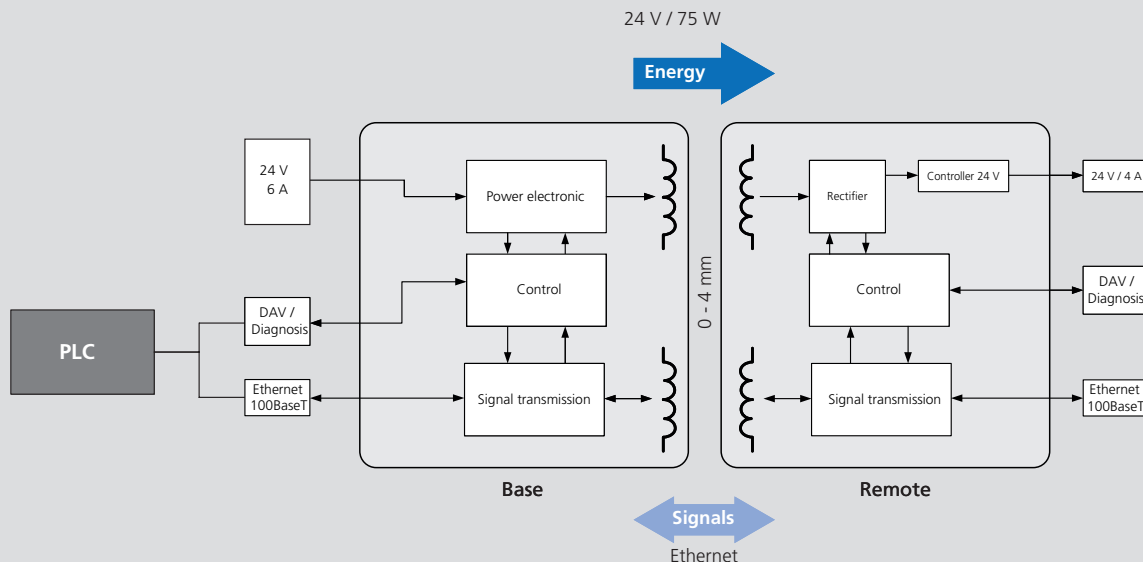

Subject to technical changes.
For more detailed information please ask our customer service.


Inductive coupling system F100 Ethernet

| SMW-electronics Type | Base | Remote |
|--|---------------------|-------------|
| Id. No. | 0E011420 | 0E011421 |
| Operating temperature (housing surface) | -20 °C ... +60 °C | |
| Storage temperature | -20 °C ... +60 °C | |
| Transmission distance | 0 mm ... 4 mm | |
| Operating voltage | 24 V | - |
| Output voltage | - | 24 V (75 W) |
| Signal transmission Ethernet (bidirectional) | Ethernet 100 Base-T | |
| LED | 2 LEDs 2-color | |
| Current consumption (Base) | 6 A (24 V) | - |
| Overload protection / short circuit protection | ✓ | ✓ |
| Residual ripple | - | < 50 mV |
| Reverse polarity protection | ✓ | - |
| Data-Valid output | max. 100 mA | |
| Ready delay | < 1s | |


- Stationary unit - Base
- Mobile unit - Remote

Axial coupler


Base / Remote:

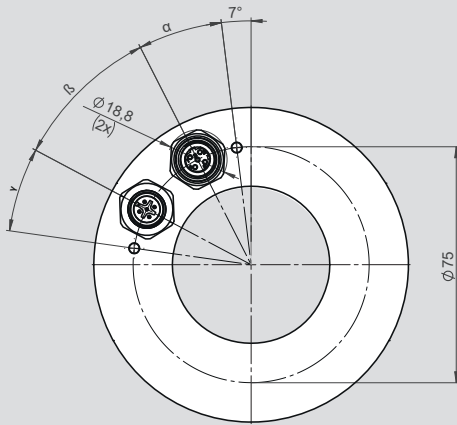


Base / Remote:

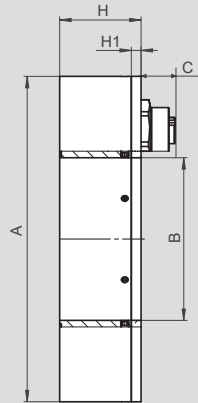

Base:



Remote:



Subject to technical changes.
For more detailed information please ask our customer service.


Inductive coupling system F100 Ethernet

| SMW-electronics Type | | Base | Remote |
|----------------------|--------|----------|----------|
| Id. No. | | 0E011420 | 0E011421 |
| A | mm | | 100 |
| B | mm | | 50 |
| C | mm | 13 | 10 |
| H | mm | | 25 |
| H1 | mm | | 3 |
| α | degree | | 27 |
| β | degree | | 35 |
| γ | degree | | 20 |
| Housing material | | Al, GFK | |
| Protection class | | IP 67 | |

| Function Base | | Function Remote | |
|---|---|---|---|
| LED Power | | LED Power | |
| Color | Green / red | Color | Green / red |
| Function | Off » Unit not supplied with voltage (or undervoltage) | Function | Off » Unit not paired |
| | On (green) » Voltage ok and mobile unit has been detected | | On (green) » Unit paired, voltage output ok |
| | 2 Hz green 50 / 50% » Operating temperature in critical range | | Flashes 2 Hz red » Paired but short circuit |
| | 1 Hz green 25 / 75% » Voltage ok but no mobile unit detected | | Flashes 5 Hz red » Internal error |
| | 1 Hz red / green » Incompatible mobile unit detected | | |
| | 2 Hz red » Foreign element detected | | |
| LED Signal transmission Ethernet | | LED Signal transmission Ethernet | |
| Color | Yellow / red | Color | Yellow / red |
| Function | Off » No mobile unit detected | Function | Off » No mobile unit detected |
| | On / yellow » Signal transmission ready | | On / yellow » Signal transmission ready |
| | 1 Hz yellow » Data packets are being transmitted | | 1 Hz yellow » Data packets are being transmitted |
| | 3 Hz yellow » 50% of the transmission bandwidth used (10 s) | | 3 Hz yellow » 50% of the transmission bandwidth used (10 s) |
| | 8 Hz red » Data packets were discarded (in the last 10 s) | | 8 Hz red » Data packets were discarded (in the last 10 s) |
| | On / red » Error in data transmission (internal error) | | On / red » Error in data transmission (internal error) |

Axial coupler

■ Contact free transmission of energy and signals

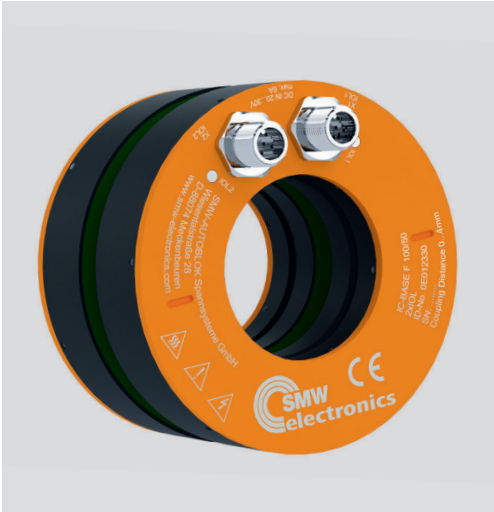


Application/customer benefits

- Contact free, safe transmission of energy and signals between moving / rotating and stationary components
- Application examples: Robotic (End of Arm Tooling), Automation, Mechanical engineering
- Substitution of slip ring / connector
- Dynamic Pairing
- Wear and maintenance free
- Protective functions: temperature monitoring, foreign object detection, reverse polarity protection
- Multi-level LED with good visibility

Technical features

- Diameter 100 mm / Through hole 50 mm
- Operating voltage 24 V / max. 6 A
- Transmission distance 0 - 4 mm
- Transmission of energy 24 V / 75 W
- Transmission of signals: 2 x IO-Link (COM 1, COM 2, COM 3)
- Connections: Base: 2x M12 x 1 male 5-pin
Remote: 2x M12 x 1 female 5-pin
- Protection class: IP 67

Block diagram:

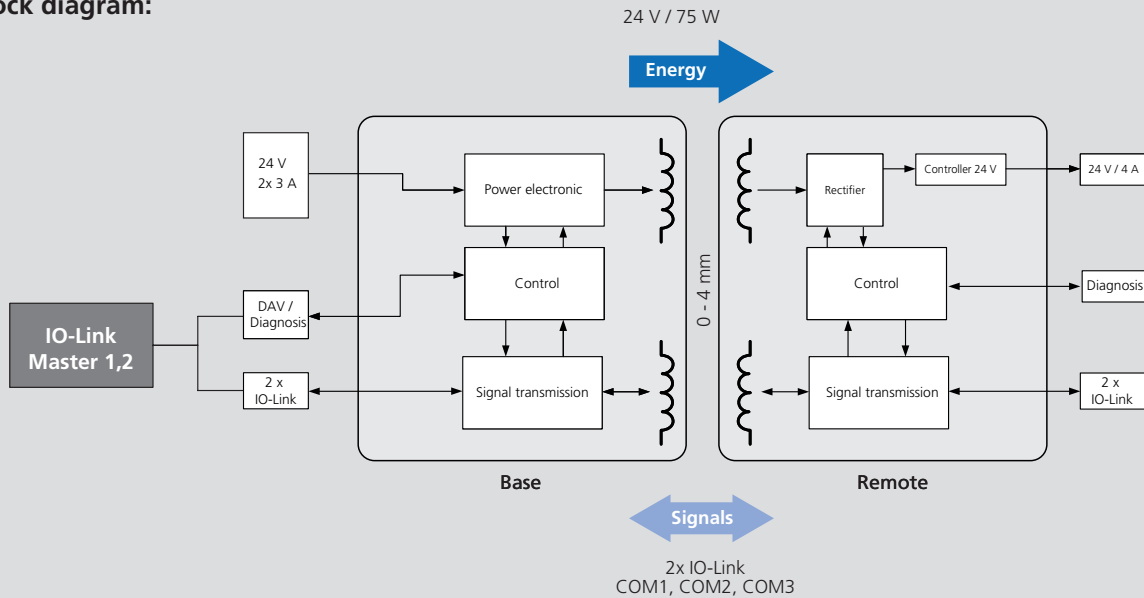

Subject to technical changes.
For more detailed information please ask our customer service.


Inductive coupling system F100-2IOL

| SMW-electronics Type | Base | Remote |
|--|---------------------------------|-----------------|
| Id. No. | 0E012330 | 0E012331 |
| Operating temperature (housing surface) | -20 °C ... +60 °C | |
| Storage temperature | -20 °C ... +60 °C | |
| Transmission distance | 0 mm ... 4 mm | |
| Operating voltage | 24 V | - |
| Output voltage | - | 24 V (75 W) |
| Signal transmission | 2x IO-Link (COM2, COM 2, COM 3) | |
| LED | 2 LEDs 2-color | |
| Current consumption (Base) | 6 A (24 V) | - |
| Overload protection / short circuit protection | ✓ | ✓ |
| Residual ripple | - | < 50 mV |
| Reverse polarity protection | ✓ | - |
| Data-Valid output | max. 100 mA | |
| Ready delay | < 1s | |


- Stationary unit - Base
- Mobile unit - Remote

Axial coupler



Base / Remote:

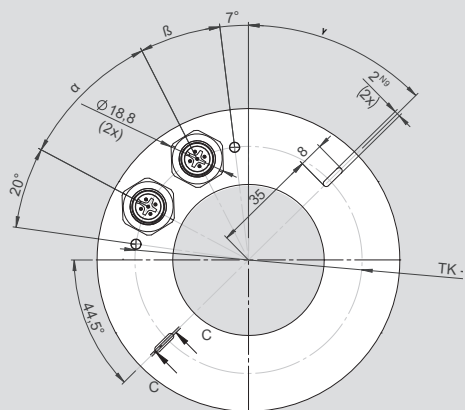

Base / Remote:


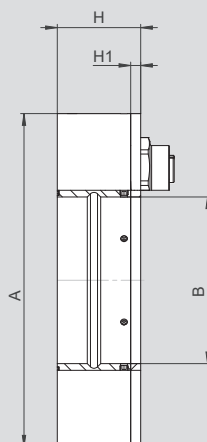


Base:



2x Male connector 5-pin
M 12 x 1

Remote:



2x Female connector 5-pin
M 12 x 1

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system F100-2IOL

| SMW-electronics Type | | Base | Remote |
|----------------------|--------|----------|----------|
| Id. No. | | 0E012330 | 0E012331 |
| A | mm | | 100 |
| B | mm | | 50 |
| C | mm | | 1 |
| H | mm | | 25 |
| H1 | mm | | 3 |
| α | degree | | 35 |
| β | degree | | 20 |
| γ | degree | | 45,5 |
| Housing material | | Al, GFK | |
| Protection class | | IP 67 | |


Function LED IO-Link Base (X1, X2)

| LED Power | |
|-----------|---|
| Color | Yellow / red |
| Function | Yellow » SIO mode active and SIO signal is high |
| | Flash yellow (1000ms on, 100ms off), » IO-Link communication active, power is on, Remote was detected |
| | Flashing 2 Hz yellow » no IO-Link device detected, power on, no Remote detected |
| | Flashing 2 Hz red » Short circuit on IO-Link PIN |
| | Flashing 5 Hz red » Overload voltage output Remote |

Function LED IO-Link Remote (X1, X2)

| LED Power | |
|-----------|--|
| Color | Yellow / red |
| Function | Yellow » SIO mode active and SIO signal is high |
| | Flash yellow (1000ms on, 100ms off), » IO-Link communication active, power is on, Base has been detected |
| | Flashing 2 Hz yellow » No IO-Link communication, power on, no Base detected |
| | Flashing 2 Hz red » Short circuit on IO-Link PIN |
| | Flashing 5 Hz red » Overload voltage output Base |

| PIN assignment | PIN | X1 Base | X2 Base | X1 Remote | X2 Remote |
|----------------|-----|------------|------------|------------|------------|
| Supply voltage | 1 | 24 V IN | 24 V IN | 24 V OUT | 24 V OUT |
| Data-Valid | 2 | DAV 24 V | - | - | - |
| Ground | 3 | GND | GND | GND | GND |
| IO-Link Signal | 4 | IO-Link CQ | IO-Link CQ | IO-Link CQ | IO-Link CQ |
| - | 5 | - | - | - | - |

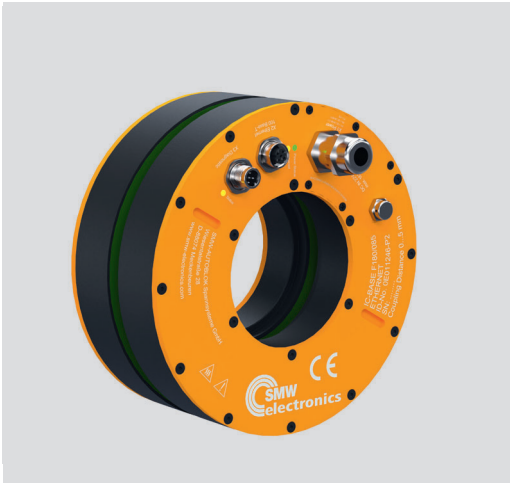


Application/customer benefits

- Contact free, safe transmission of energy and signals between moving / rotating and stationary components
- Application examples: Packaging machines, special machines, Automation, Machine Tools, Printing Machines, Robot applications (EOAT)
- Substitution of slip ring / connector
- Dynamic Pairing
- Wear and maintenance free
- Protective functions: temperature monitoring, foreign object detection
- Multi-level LED with good visibility

Technical features

- Diameter: 180 mm / Through hole: 85 mm
- Operating voltage: 24 V or 48 V
- Transmission distance: 0 - 5 mm at 24 V or 0 - 3 mm at 48 V
- Energy transmission: 24 V / 240 W or 48 V / 400 W (settable)
- Signal transmission: Ethernet 100 Base-T
- Transmission bandwidth < 5 MBit/s
- Connections: M12 Ethernet (D-coded), M12 Diagnosis (A-coded), terminal block (Energy)
- Protection class: IP 67

Block diagram:

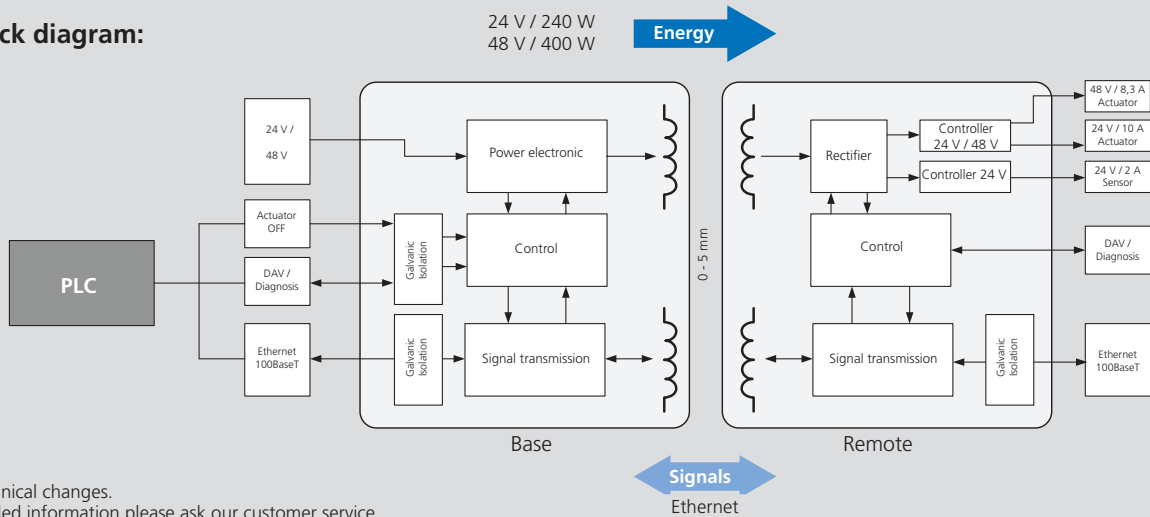

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system F180 Ethernet


| SMW-electronics Type | Base | Remote |
|--|--|-----------------------------------|
| Id. No. | 0E011246 | 0E011247 |
| Operating temperature (body surface) | -20° C ... +60° C | |
| Stocking temperature | -20° C ... +60° C | |
| Transmission distance | 0 mm ... 5 mm (24 V) 0 mm ... 3 mm (48 V) | |
| Operating voltage | 24 V / 48 V | - |
| Output voltage (Actuator supply)* | - | 24 V DC / 10 A 48 V DC / 8,3 A |
| Output voltage (Sensor supply)* | - | 24 V DC / 4 A |
| Signal transmission | Ethernet 100 Base-T | |
| LED function display | 3 LEDs 2-color | |
| Current consumption (base) | 15 A (24 V) 12 A (48 V) | - |
| Overload protection / short-circuit protection | ✓ | ✓ |
| Reverse polarity protection | - | < 50 mV |
| Data valid output | max. 100 mA | - |
| Ready delay | < 1 s | |

*max 400 W total


- Stationary Unit - Base
- Mobile Unit - Remote

Axial coupler


Base / Remote:

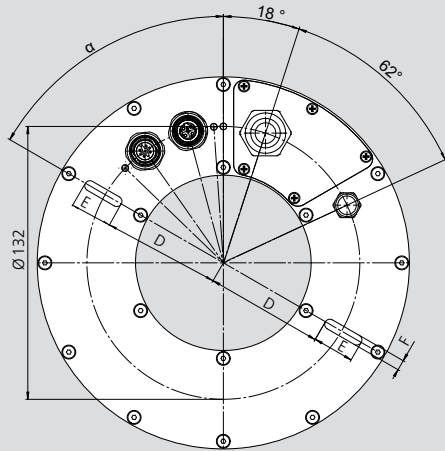


Base / Remote:

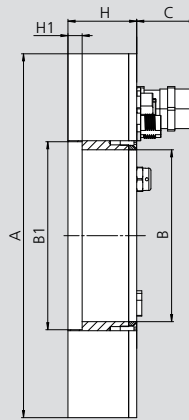

Base:



Remote:



Subject to technical changes.
For more detailed information please ask our customer service.


Inductive coupling system F180 Ethernet

| SMW-electronics Type | Base | | Remote | |
|-------------------------|----------|------|----------|--|
| Id. No. | 0E011246 | | 0E011247 | |
| A | mm | 180 | | |
| B | mm | 85 | | |
| B1 | mm | 93 | | |
| C | mm | 29.5 | | |
| D | mm | 57 | | |
| E | mm | 20 | | |
| F | mm | 5 | | |
| H | mm | 34 | | |
| H1 | mm | 7 | | |
| a | degree | 60 | | |
| Housing material | | | Al, GFK | |
| Protection class | | | IP 67 | |

| Function Base | | Function Remote | |
|---|---|--------------------------------|--|
| LED Power | | LED Actuator | |
| Color | Green/red | Color | Green/red |
| Function | Off » Unit not supplied with voltage (or undervoltage) On (green) » Voltage ok and mobile unit has been detected 2 Hz green 50/ 50% » Operating temperature in critical range 1 Hz green 25/75% » Voltage ok but no mobile unit detected 1 Hz red/green » Incompatible mobile unit detected 2 Hz red » Foreign element detected 5 Hz red » Internal error | Function | Off » Unit not paired On (green) » Unit paired, voltage output actuator ok Flashes 2 Hz red » Unit paired but short circuit on actuator Flashes 5 Hz red » Internal error |
| LED Signal transmission Ethernet | | LED Sensor supply | |
| Color | Yellow/red | Color | Green/red |
| Function | Off » No mobile unit detected On/yellow » Signal transmission ready 1 Hz yellow » Data packets are being transmitted 3 Hz yellow » 50% of the transmission bandwidth used (10 s) 8 Hz red » Data packets were discarded (in the last 10 s) On/red » Error in data transmission (internal error) | Function | Off » Unit not paired On (green) » Unit paired, voltage output sensor (24 V) ok Flashes 2 Hz red » Unit paired but short circuit on sensor (24 V) Flashes 5 Hz red » Internal error |
| LED Energy transmission | | LED Signal transmission | |
| Color | Yellow/red | Color | Yellow/red |
| Function | Off » No mobile unit detected On (yellow) » Unit coupled, voltage output ok 1 Hz red/yellow » Short circuit at voltage output sensor 3 Hz red/yellow » Short circuit at voltage output actuator 3 Hz red » Short circuit at both voltage outputs 5 Hz red » Internal error | Function | Off » No mobile unit detected On/yellow » Signal transmission ready Flashes 1 Hz yellow » Data packets are being transmitted Flashes 3 Hz yellow » 50% of the transmission bandwidth used (10 s) Flashes 8 Hz red » Data packets were discarded (in the last 10 s) On/red » Error in data transmission (internal error) |

Axial coupler

■ Contact free transmission of energy and signals

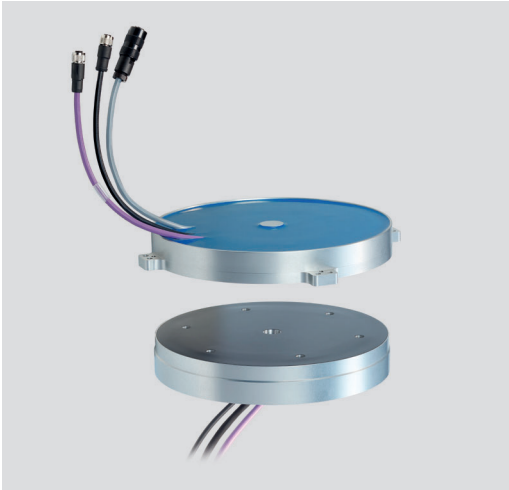


Application/customer benefits

- Contact free, safe transmission of energy and signals between moving / rotating and stationary components
- Connection from mechatronic clamping systems (MM / RT e-motion line) within machine tools, slip ring replacement
- Dynamic Pairing
- Free from wear and maintenance

Technical features


- Operating voltage 60 V \pm 10%
- Energy transmission: 60 V / 1100 W (18 A) actuators, 24 V (2 A) sensors
- Signal transmission: Bus system 2x CAN BUS
- Signal transmission: Digital 2 x 24 V switching signal remote to base
- Diameter 280 mm
- Transmission distance 0 - 3 mm
- Inverse-polarity protection (base), short-circuit proof (remote)
- Protection class: IP 67

Block diagram:

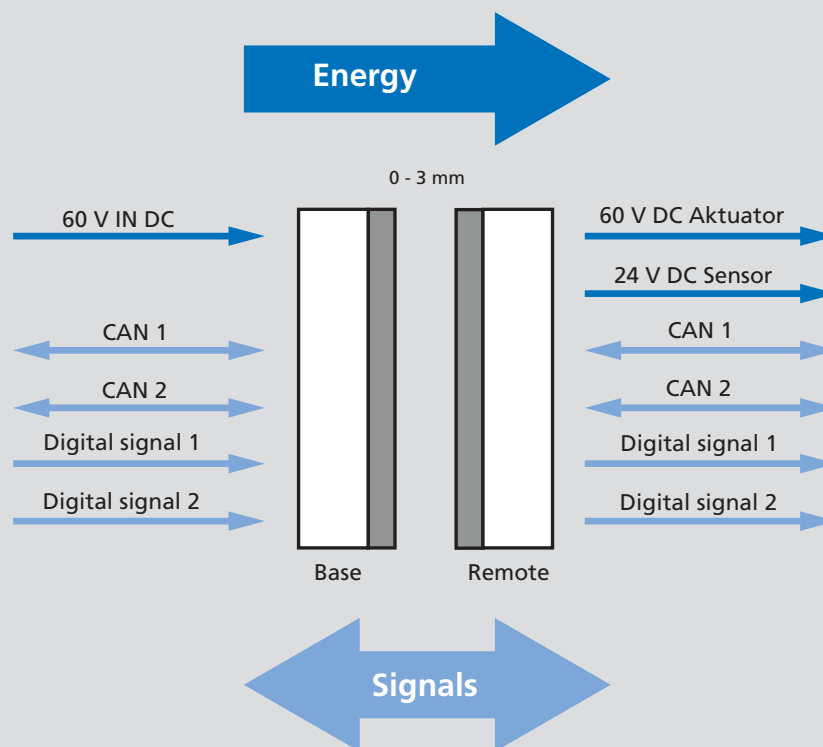


Subject to technical changes.
For more detailed information please ask our customer service.

Base:

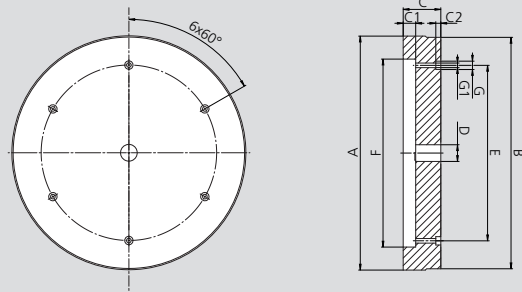

Remote:

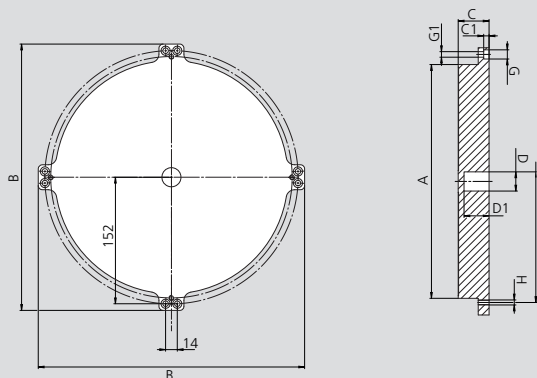

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system F280 CAN

| SMW-electronics Type | | Base | Remote |
|--|----|-------------------|---|
| Id. No. | | 208004 | 208005 |
| A | mm | 280 | |
| B | mm | 277 | 320 |
| C | mm | 45 | 37 |
| C1 | mm | 15 | 6.4 |
| C2 | mm | 6 | - |
| D | mm | 20 | 23 |
| D1 | mm | - | 30 |
| E | mm | 210 | 290 |
| F | mm | 225 | - |
| G | mm | 10 | 11 |
| G1 | mm | 5.5 | 6.6 |
| H | mm | - | M6 |
| Weight | | 4.6 kg | 4.1 kg |
| Housing material | | Al, PA12 | |
| Protection class | | IP 67 | |
| Operating temperature | | -10° C ... +50° C | |
| Storage temperature | | -25° C ... +70° C | |
| Transmission distance | | 0 mm ... 3 mm | |
| Operating voltage | | 60 V DC | - |
| Output voltage actuator | | - | 60 V DC |
| Output voltage sensor | | - | 24 V DC |
| Power consumption (Base) | | < 25 A | - |
| Power output (Remote) | | - | Max. 18 A Aktuator (60 V) / max. 2 A Sensor (24 V) |
| Overload protection / short circuit protection | | | ✓ |
| Residual ripple | | - | < 5 V |
| Reverse polarity protection | | ✓ | - |
| Ready delay | | < 800 ms | |

Axial coupler

- Contact free transmission of energy and signals
- Ideal for pallet change applications




Application/customer benefits

- Contact free, safe transmission of energy and signals between moving / rotating and stationary components
- Application examples: Supply of sensors and valves in pallet change applications
- Dynamic Pairing
- Wear and maintenance free
- Protective functions: Temperature monitoring, foreign object detection, reverse polarity protection

Technical features

- Mounting 4 x M5 x 20, pitch circle \varnothing 84 mm
- Axial installation sealing
- Operating voltage 24 V (18 ... 30 V)
- Transmission distance 0 - 5 mm
- Transmission of energy: 24 V / 22 W
- Transmission of signals: IO-Link (COM1, COM2, COM3)
- Connection: Base male connector M12x1 (5-pin), remote female connector M12x1 (4-pin)
- Protection class IP 67
- Id. No. Base: 0E012280
- Id. No. Remote: 0E012290

Block diagram:

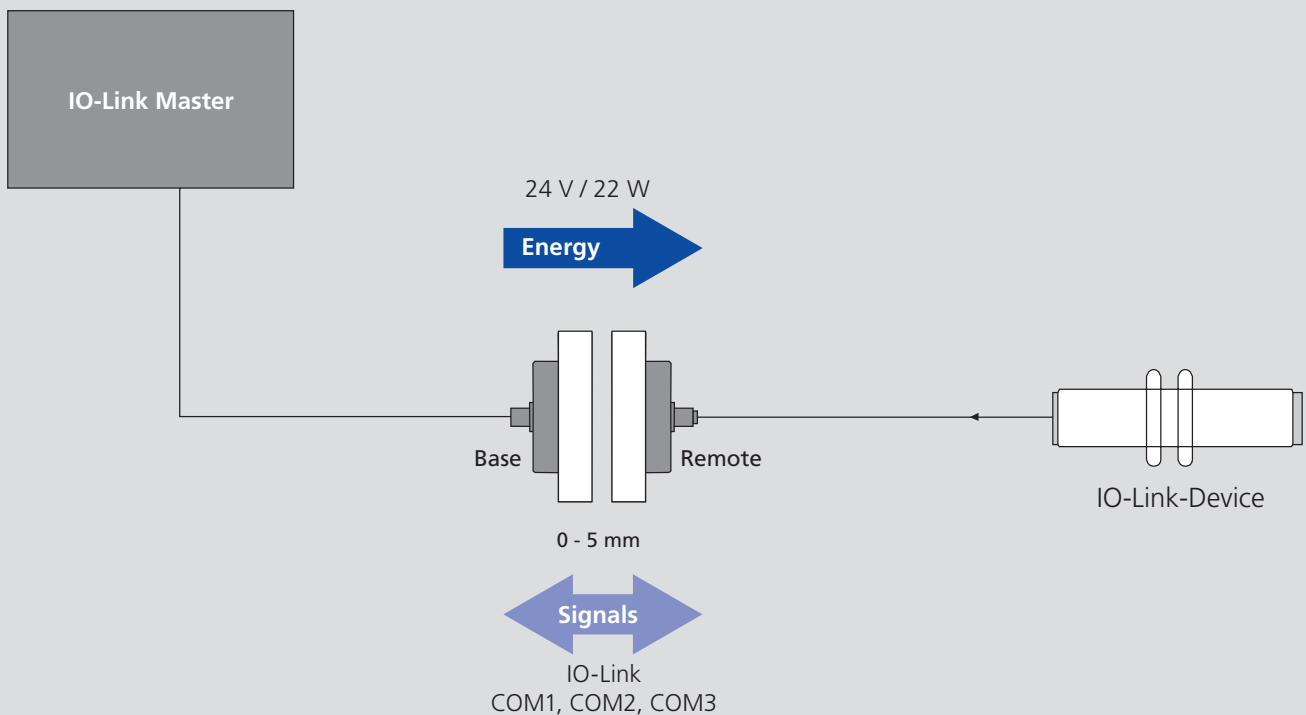


Subject to technical changes.
For more detailed information please ask our customer service.

- Contact free transmission of energy and signals
- Ideal for pallet change applications

Axial coupler


Base/ Remote:

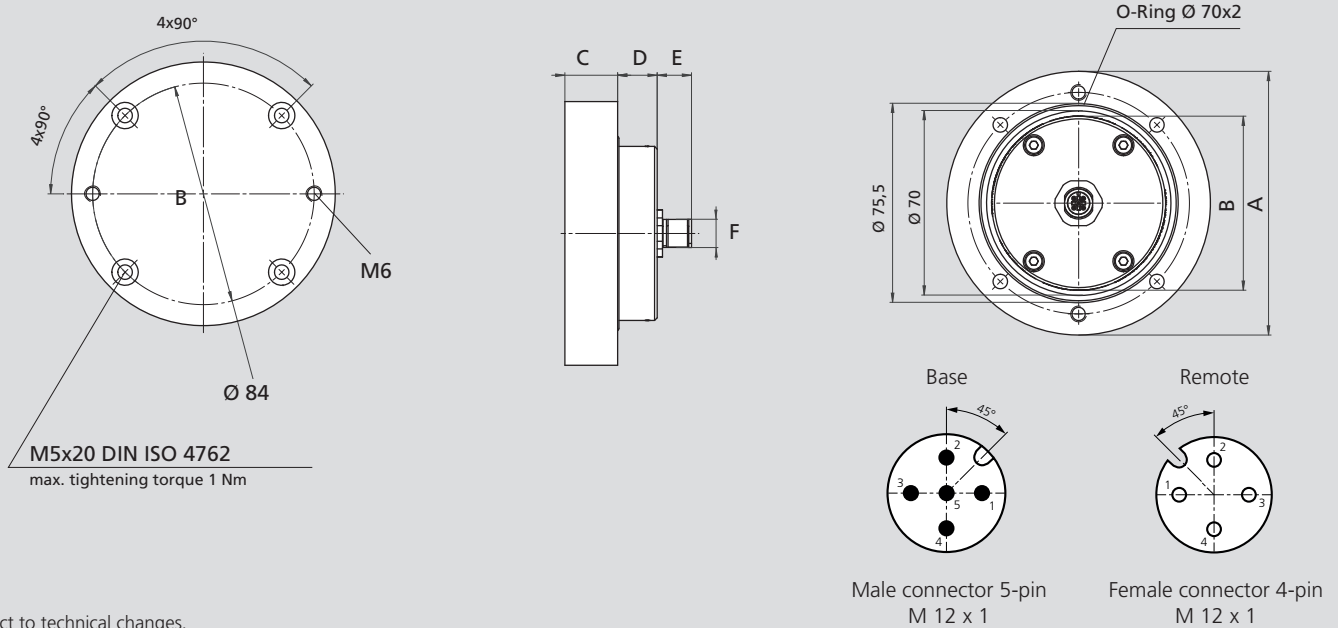

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system F100/66-IOL

| SMW-electronics Type | | Base | Remote |
|--|----|--------------------|------------------|
| Id. No. | | 0E012280 | 0E012290 |
| A | mm | 100 - 0,1 | |
| B | mm | 66 - 0,1 | |
| C | mm | 20 - 0,1 | |
| D | mm | 15 | |
| E | mm | 12 | |
| F | mm | M12 x 1 / Male | M12 x 1 / Female |
| Housing material | | PA 12 C, AL | |
| Protection class | | IP 67 | |
| Operating temperature | | -20° C ... +50° C | |
| Storage temperature | | -20° C ... +80° C | |
| Transmission distance | | 0 - 5 mm | |
| Operating voltage | | 24 V (18 ... 30 V) | - |
| Output voltage | | - | 24 V ± 10% DC |
| Power consumption (Base) | | 1600 mA | - |
| Power output (Remote) | | - | 920 mA |
| Overload protection / short circuit protection | | ✓ | ✓ |
| Residual ripple | | - | < 200 mV |
| Reverse polarity protection | | ✓ | - |
| Temperature monitoring | | ✓ | ✓ |
| Data-Valid Output | | 150 mA | - |
| Ready delay | | < 600 ms | |
| PIN assignment | | Signal Base | Signal Remote |
| Supply voltage | 1 | 24 V IN | 24 V OUT |
| Digital signal | 2 | 0/24 V OUT | 0/24 V IN |
| Ground | 3 | GND | GND |
| IO-Link Signal | 4 | IO-Link CQ | IO-Link CQ |
| Data-Valid | 5 | DAV 24 V | - |

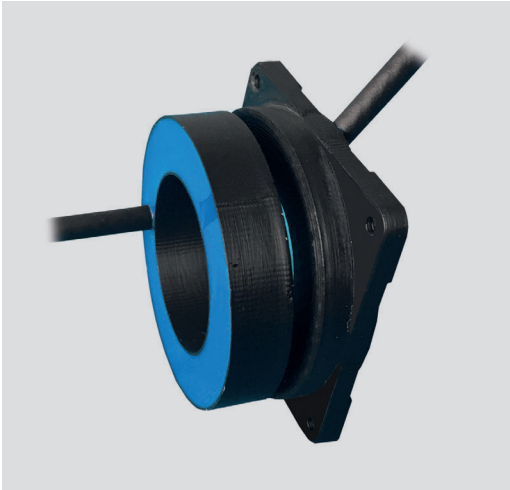


Application/customer benefits

- Contact free, safe transmission of energy and signals between moving / rotating and stationary components
- Application example: Monitoring of sensors in clamping systems, automation, slip ring replacement
- Base with mounting flange
- Dynamic Pairing
- Wear and maintenance free

Technical features

- Operating voltage $24\text{ V} \pm 10\%$
- Transmission distance 0 - 3 mm
- Energy transmission: $24\text{ V} / 2.5\text{ W}$ (100 mA)
- Transmission of signals: 4 analog signals (0 - 10 V) / 4 digital signals (PNP)
- Inverse-polarity protection (base), short-circuit proof (remote)
- Protection class: IP 67
- Id. No. Base: OE010972
- Id. No. Remote: OE010973

Block diagram:

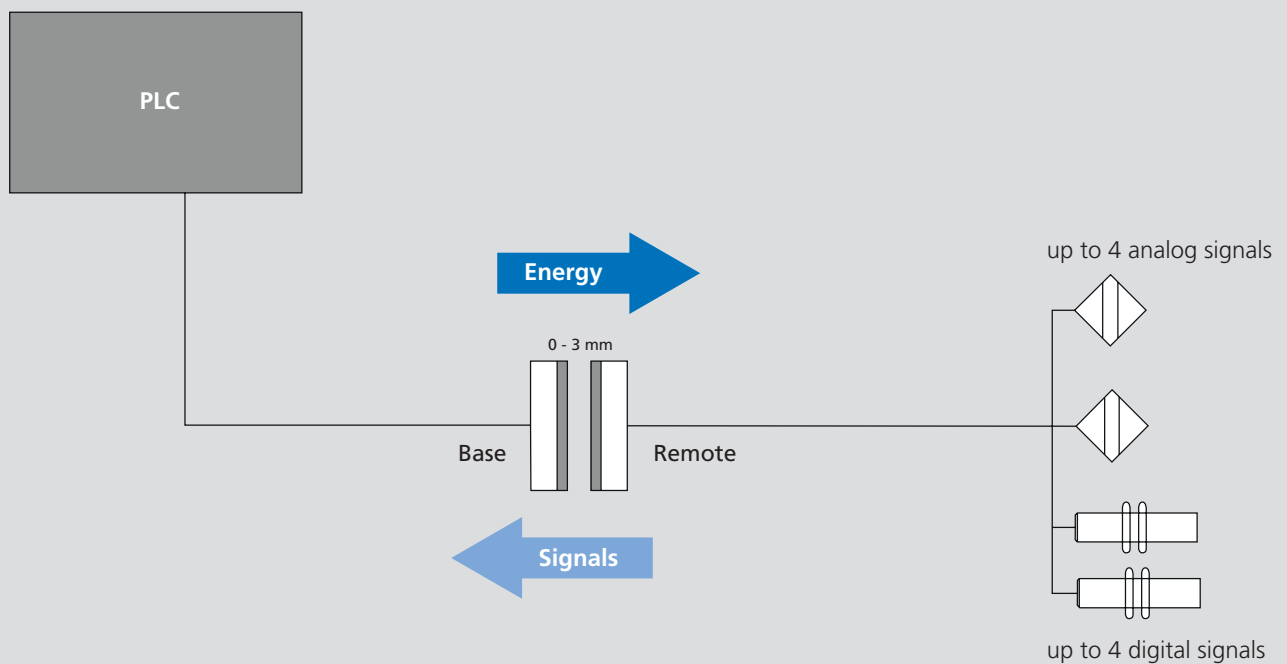


Subject to technical changes.
For more detailed information please ask our customer service.


- Stationary unit - Base
- Mobile unit - Remote

Axial coupler

Base:

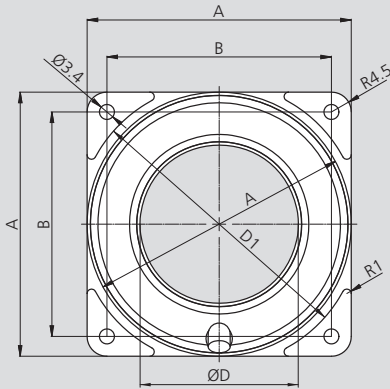


Remote:

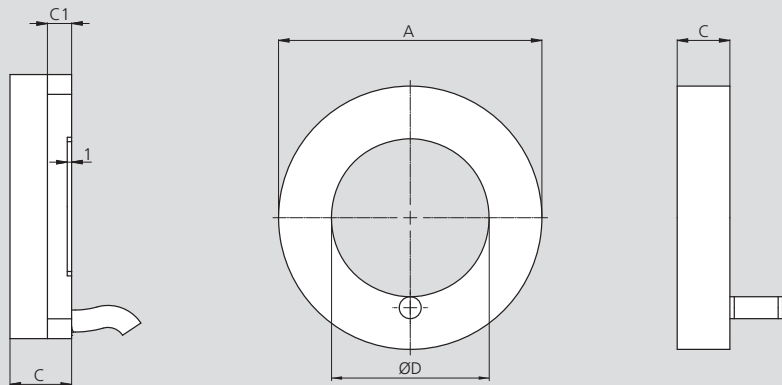

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system F60-4/4A

| SMW-electronics Type | Base | | Remote |
|--|----------------------|----|---------------|
| Id. No. | 0E010972 | | 0E010973 |
| A | mm | 60 | - |
| B | mm | 51 | - |
| C | mm | 14 | 12 |
| C1 | mm | 13 | - |
| D | mm | 36 | - |
| D1 | mm | 64 | - |
| Housing material | POM, PA66, PC GF 30% | | |
| Protection class | IP 67 | | |
| Operating temperature | 0° C ... +60° C | | |
| Storage temperature | -10° C ... +70° C | | |
| Transmission distance | 0 mm ... 3 mm | | |
| Operating voltage | 24 V ± 10% DC | | - |
| Output voltage | - | - | 24 V ± 10% DC |
| Power consumption (Base) | < 300 mA | | - |
| Power output (Remote) | - | - | < 100 mA |
| Overload protection / short circuit protection | ✓ | | ✓ |
| Residual ripple | - | - | < 200 mV |
| Reverse polarity protection | ✓ | | - |
| Data-Valid Output | 0 / 24 V | | - |
| Ready delay | ≤ 100 ms | | |

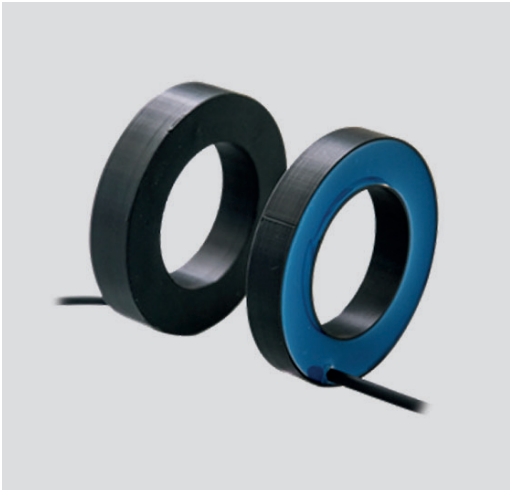


Application/customer benefits

- Contact free, safe transmission of energy and signals between moving / rotating and stationary components
- Application examples: Robotics, slip ring replacement
- Dynamic Pairing
- Wear and maintenance free

Technical features

- Operating voltage 24 V \pm 10 %
- Transmission distance 0 - 3 mm
- Transmission of energy: 24 V / 2.5 W (100 mA)
- Transmission of signals: 4 analog signals (0 - 10 V) / 4 digital signals (PNP)
- Inverse-polarity protection (base), short-circuit proof (remote)
- Protection class: IP 67
- Id. No. Base: 0E010974
- Id. No. Remote: 0E010975

Block diagram:

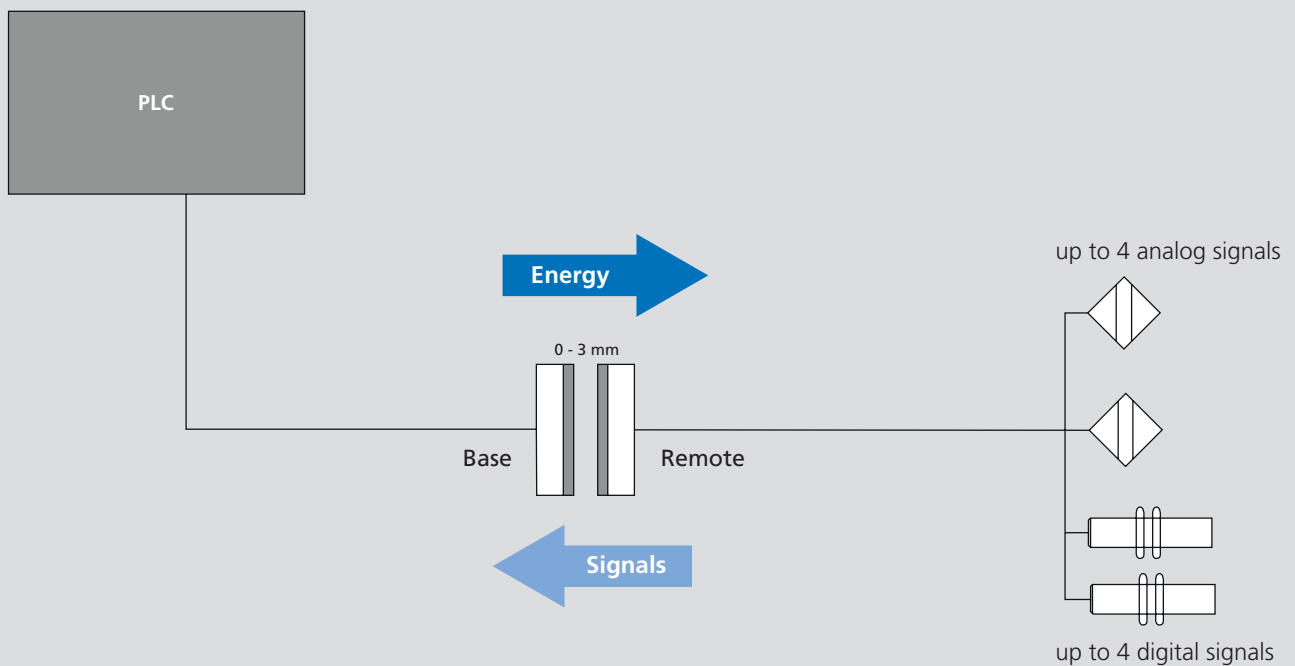


Subject to technical changes.
For more detailed information please ask our customer service.


- Stationary Unit - Base
- Mobile Unit - Remote

Axial coupler

Base:

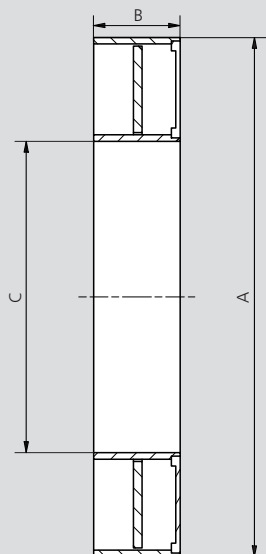


Remote:

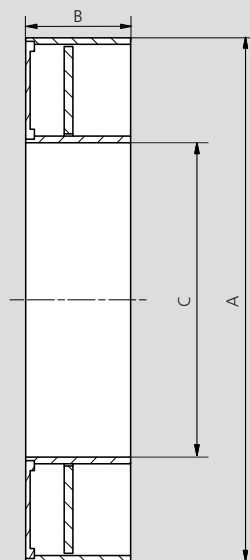

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system F60-4/4A

| SMW-electronics Type | | Base | Remote |
|--|----|----------------------|---------------|
| Id. No. | | 0E010974 | 0E010975 |
| A | mm | | Ø 60 |
| B | mm | 10 | 12 |
| C | mm | | Ø 36 |
| Housing material | | POM, PA66, PC GF 30% | |
| Protection class | | IP 67 | |
| Operating temperature | | 0° C ... +60° C | |
| Storage temperature | | -10° C ... +70° C | |
| Transmission distance | | 0 mm ... 3 mm | |
| Operating voltage | | 24 V ± 10% DC | - |
| Output voltage | | - | 24 V ± 10% DC |
| Power consumption (Base) | | < 300 mA | - |
| Power output (Remote) | | - | < 100 mA |
| Overload protection / short circuit protection | | ✓ | ✓ |
| Residual ripple | | - | ≤ 200 mV |
| Reverse polarity protection | | ✓ | - |
| Data-Valid Output | | 0 / 24 V | - |
| Ready delay | | ≤ 100 ms | |

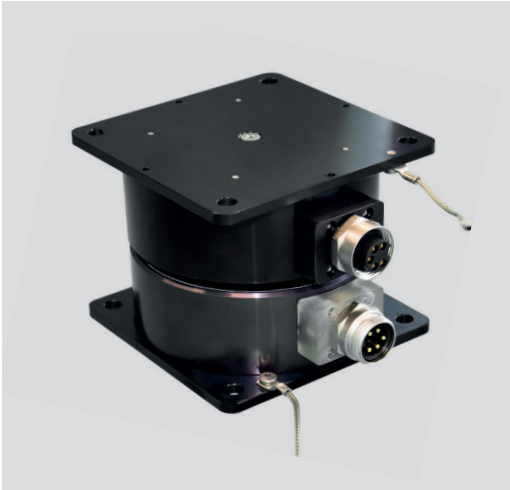


Application/customer benefits

- Contact free, safe transmission of energy (power only) between moving / rotating and stationary components
- Application examples: Automation, replacement of slip ring
- Dynamic Pairing
- Wear and maintenance free

Technical features

- Flange mounting 120 x 120 mm (Diameter 116 mm)
- Operating voltage 24 V ± 10%
- Transmission distance 0 - 4 mm
- Transmission of energy 24 V / 120 W
- Inverse-polarity protection (base), short-circuit proof (remote)
- Connections: Base male connector 7/8" (5-pin), remote female connector 7/8" (5-pin)
- Protection class: IP 67
- Id. No. Base: 0E010983
- Id. No. Remote: 0E010984
- LED interface (base) color: green
 - slow flashing: power on / no remote detected
 - static: connection to remote established
 - fast flashing: overload / short circuit

Block diagram:

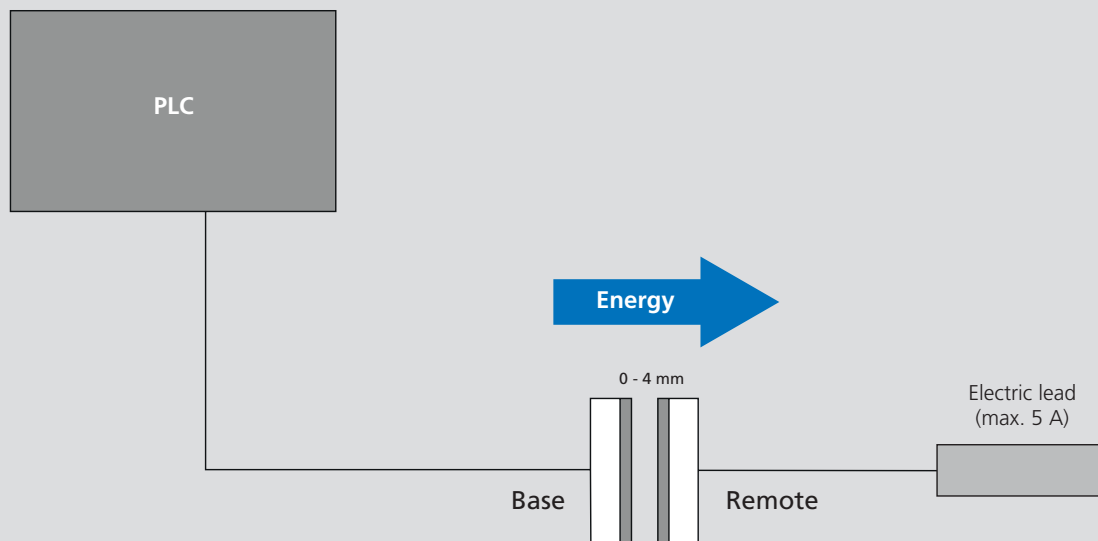


Subject to technical changes.
For more detailed information please ask our customer service.


- Stationary Unit - Base
- Mobile Unit - Remote

Axial coupler

Base/Remote:

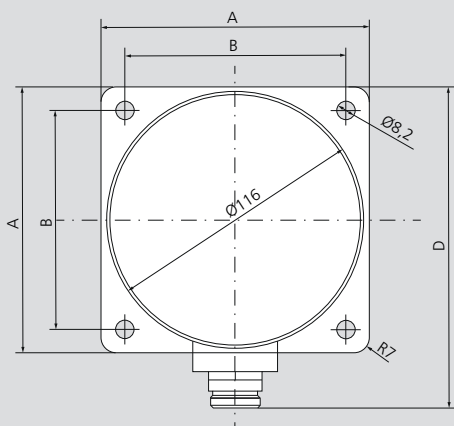

Base/Remote:

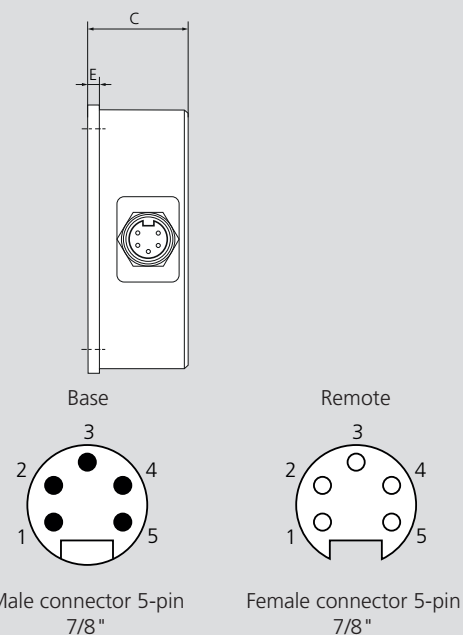

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system F120

| SMW-electronics Type | Base | | Remote |
|--|----------|---------------------|---------------|
| Id. No. | 0E010983 | | 0E010984 |
| A | mm | 120 | |
| B | mm | 99 | |
| C | mm | 45 | |
| D | mm | 145 | 148.5 |
| E | mm | 5 | |
| Weight | | 850 g | |
| Housing material | | Al, PA66, PC GF 30% | |
| Protection class | | IP 67 | |
| Operating temperature | | 0° C ... +50° C | |
| Storage temperature | | -10° C ... +70° C | |
| Transmission distance | | 0 mm ... 4 mm | |
| Operating voltage | | 24 V ± 10% DC | - |
| Output voltage | | - | 24 V ± 10% DC |
| Power consumption (Base) | | < 10 A | - |
| Power output (Remote) | | - | < 5 A |
| Overload protection / short circuit protection | | ✓ | ✓ |
| Residual ripple | | - | < 200 mV |
| Reverse polarity protection | | ✓ | - |
| Data-Valid Output | | - | - |
| Ready delay | | < 500 ms | |
| PIN assignment | PIN | Signal Base | Signal Remote |
| Ground | 1 | | GND |
| Ground | 2 | | GND |
| PE Protective earth | 3 | | PE |
| Voltage supply | 4 | 24 V IN | 24 V OUT |
| Voltage supply | 5 | 24 V IN | 24 V OUT |



Application/customer benefits


- Contact free, safe transmission of energy and signals between moving / rotating and stationary components
- Application examples: Supply of mobile sensors, supply and monitoring of remote systems, monitoring of door contacting
- Dynamic Pairing
- Wear and maintenance free
- Operating display

Technical features

- Mounting M12 x 1
- Operating voltage 24 V ± 10%
- Transmission distance 0 - 2.5 mm
- Transmission of energy: 24 V / 1 W (35 mA)
- Transmission of signals: 2 digital signals (PNP)
- Inverse-polarity protection (base), short-circuit proof (remote)
- Connections: Base cable 300 mm with male connector M12 (5-pin), remote cable 300 mm with female connector M12 (5-pin)
- Protection class IP 67
- Id. No. Base: 0E010956, Id. No. Remote: 0E010957
- LED interface (Base)

| | |
|----------------|-------------------------------|
| color: | green |
| slow flashing: | power on / no remote detected |
| static: | in position |
| fast flashing: | overload / short circuit |


Block diagram:

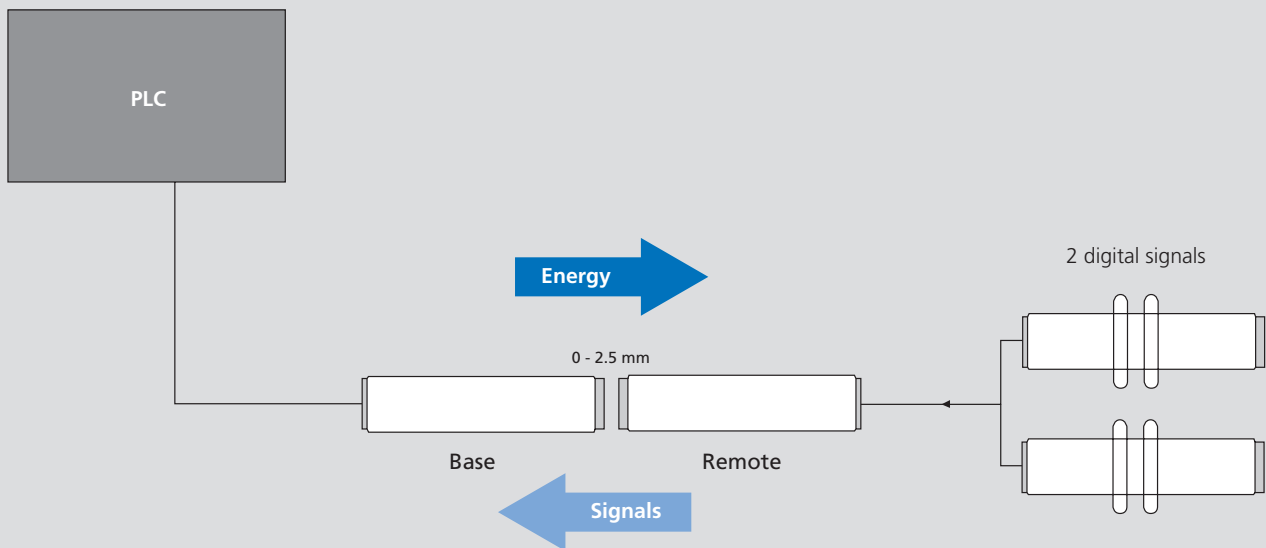

Subject to technical changes.
For more detailed information please ask our customer service.

- Stationary Unit - Base
- Mobile Unit - Remote

Axial coupler

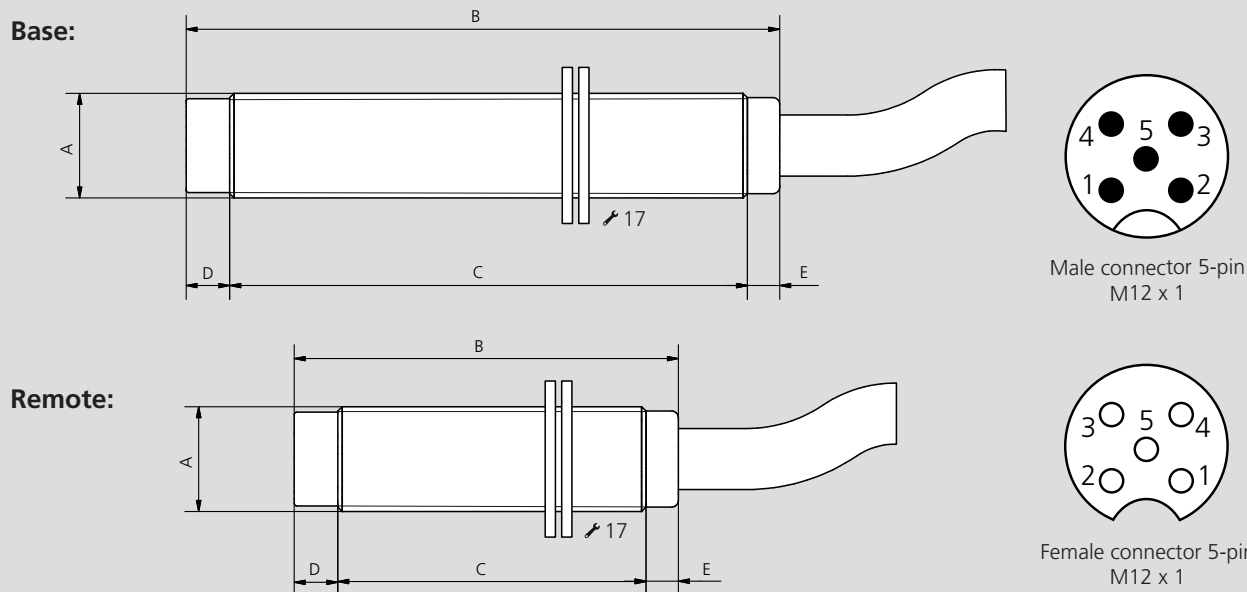

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system M12-2

| SMW-electronics Type | | Base | Remote |
|--|----|-----------------------|---------------|
| Id. No. | | 0E010956 | 0E010957 |
| A | mm | | M12 x 1 |
| B | mm | 68 | 44 |
| C | mm | 59.3 | 35.3 |
| D | mm | | 5 |
| E | mm | | 3.7 |
| Cable length | mm | | 300 |
| Housing material | | CuZn, PA66, PC GF 30% | |
| Protection class | | IP 67 | |
| Operating temperature | | -10° C ... +55° C | |
| Storage temperature | | -25° C ... +70° C | |
| Transmission distance | | 0 mm ... 2.5 mm | |
| Operating voltage | | 24 V ± 10% DC | - |
| Output voltage | | - | 24 V ± 10% DC |
| Power consumption (Base) | | > 400 mA | - |
| Power output (Remote) | | - | < 50 mA |
| Overload protection / short circuit protection | | ✓ | ✓ |
| Residual ripple | | - | < 200 mV |
| Reverse polarity protection | | ✓ | - |
| Data-Valid Output | | max. 100 mA | - |
| Ready delay | | | 100 ms |
| PIN assignment | | Signal Base | Signal Remote |
| Supply voltage | 1 | +24 V IN | +24 V OUT |
| Digital signal 1 | 2 | 0 / 24 V OUT | 0 / 24 V IN |
| Ground | 3 | GND | GND |
| Digital signal 2 | 4 | 0 / 24 V OUT | 0 / 24 V IN |
| Data-Valid | 5 | DAV 24 V | - |

Axial coupler

■ Contact free transmission of energy and signals



Application/customer benefits


- Contact free, safe transmission of energy and signals between moving / rotating and stationary components
- Application examples: Automation, piloting of magnet valves, reading of status signals, online monitoring of sensor signals in the remote area, contacting at rotary tables, plug replacement for SPS signals
- Dynamic Pairing
- Wear and maintenance free
- Operating display

Technical features

- Mounting M18 x 1
- Operating voltage 22 V ... 30 V \pm 10%
- Transmission distance 0 - 3 mm
- Transmission of energy: 12 V / 1.2 W (100 mA)
- Transmission of signals: 4 digital signals (PNP)
- Inverse-polarity protection (base), short-circuit proof (remote)
- Connection: Base cable 2000 mm open ended, remote cable 2000 mm open ended
- Protection class: IP 67
- Id. No. Base: OE010954
- Id. No. Remote: OE010955
- LED interface (base)

| | |
|----------------|--------------------------|
| color: | green |
| slow flashing: | power on |
| static: | in position |
| fast flashing: | overload / short-circuit |

Block diagram:

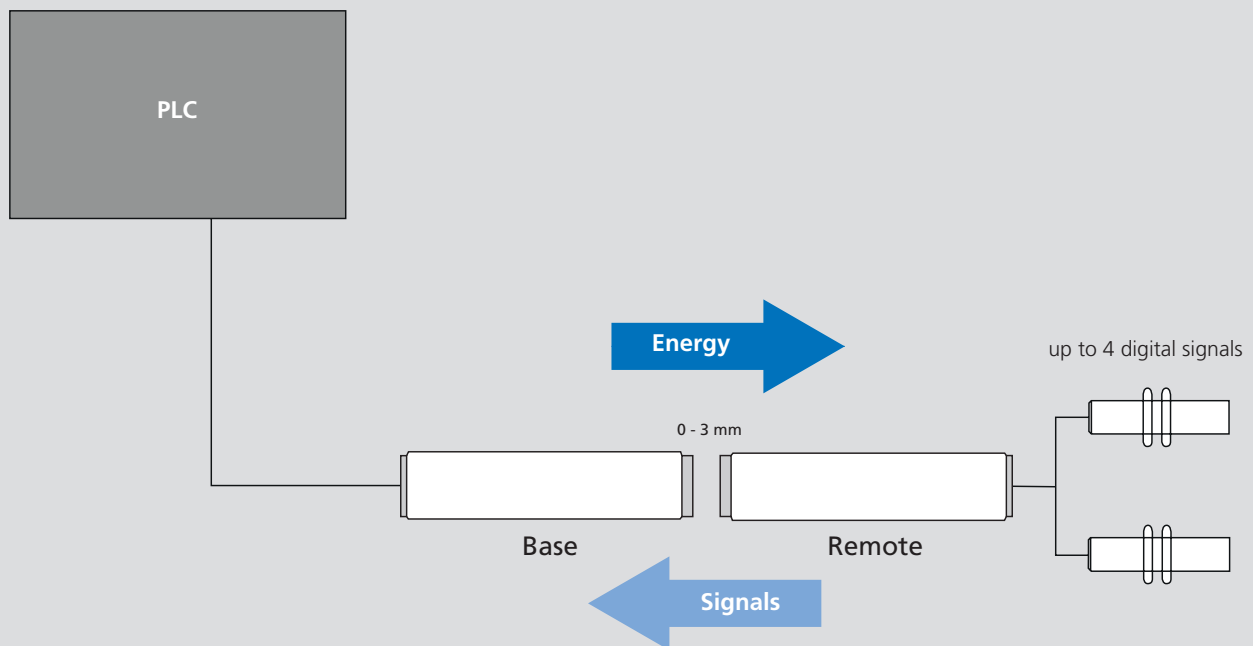


Subject to technical changes.
For more detailed information please ask our customer service.


- Stationary Unit - Base
- Mobile Unit - Remote

Axial coupler

Base:

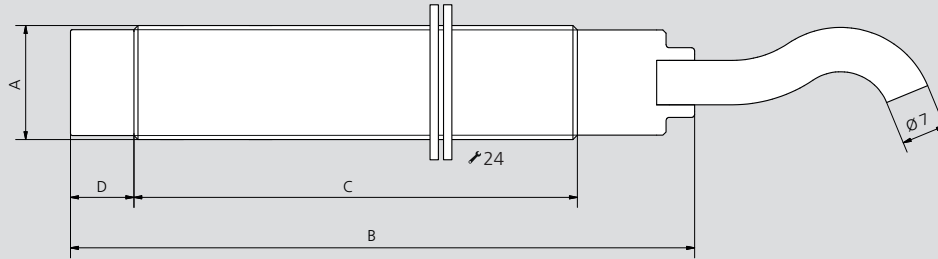

Remote:

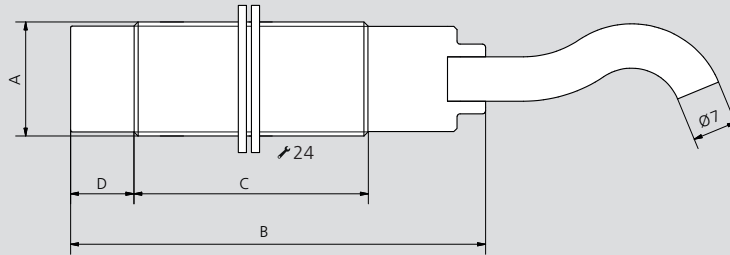

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system M18-4

| SMW-electronics Type | | Base | Remote |
|--|----|--------------------------------|-------------------------------|
| Id. No. | | 0E010954 | 0E010955 |
| A | mm | M18 x 1 | |
| B | mm | 98.5 | 65.5 |
| C | mm | 70 | 37 |
| D | mm | 10 | |
| Cable length | mm | ~ 2000 | |
| Housing material | | CuZn, PA66, PC GF 30% | |
| Protection class | | IP 67 | |
| Operating temperature | | 0° C ... +50° C | |
| Storage temperature | | -10° C ... +70° C | |
| Transmission distance | | 0 mm ... 3 mm | |
| Operating voltage | | 22 V ... 30 V | - |
| Output voltage | | - | 12 V ± 10% DC |
| Power consumption (Base) | | ≤ 500 mA | - |
| Power output (Remote) | | - | < 100 mA |
| Overload protection / short circuit protection | | ✓ | ✓ |
| Residual ripple | | - | < 200 mV |
| Reverse polarity protection | | ✓ | - |
| Data-Valid Output | | max. 100 mA | - |
| Ready delay | | < 80 ms | |
| PIN assignment (*Legend) | | Signal Base | Signal Remote |
| Connection line WH (Base) / WH (Remote) | 1 | Supply voltage 24 V IN | Supply voltage VCC 12 V OUT |
| Connection line BU (Base) / BU (Remote) | 2 | GND 0 V | GND |
| Connection line GY (Base) / BN (Remote) | 3 | Data-Valid 0 / 24 V OUT | Digital signal 1: 0 / 24 V IN |
| Connection line BN (Base) / PK (Remote) | 4 | Digital signal 1: 0 / 24 V OUT | Digital signal 2: 0 / 24 V IN |
| Connection line PK (Base) / YE (Remote) | 5 | Digital signal 2: 0 / 24 V OUT | Digital signal 3: 0 / 24 V IN |
| Connection line YE (Base) / GN (Remote) | 6 | Digital signal 3: 0 / 24 V OUT | Digital signal 4: 0 / 24 V IN |
| Connection line GN (Base) / GY (Remote) | 7 | Digital signal 4: 0 / 24 V OUT | - |

(*Legend) WH = White; BU = Blue; GY = Grey; BN = Brown; PK = PINK; YE = YELLOW; GN = Green;

Axial coupler

■ Contact free transmission of energy and signals




Application/customer benefits

- Contact free, safe transmission of energy and signals between moving / rotating and stationary components
- Application examples: Supply of sensors, supply and monitoring of remote systems, contactless battery charge (W-Charge), monitoring of door contacting, valve control, plug replacement
- Dynamic Pairing
- Wear and maintenance free
- Protective functions: Temperature monitoring, foreign object detection, reverse polarity protection
- Multi-level LED with good visibility

Technical features

- Mounting M30 x 1.5
- Operating voltage 24 V (18 ... 30 V)
- Transmission distance 0 - 8 mm
- Transmission of energy: 24 V / 12 W (500 mA)
- Transmission of signals: 2 digital signals (PNP)
- Connection: Remote female connector M12x1 (5-pin), base male connector M12x1 (4-pin)
- Protection class IP 67
- Id. No. Base: 0E011600, Id. No. Remote: 0E011601

Block diagram:

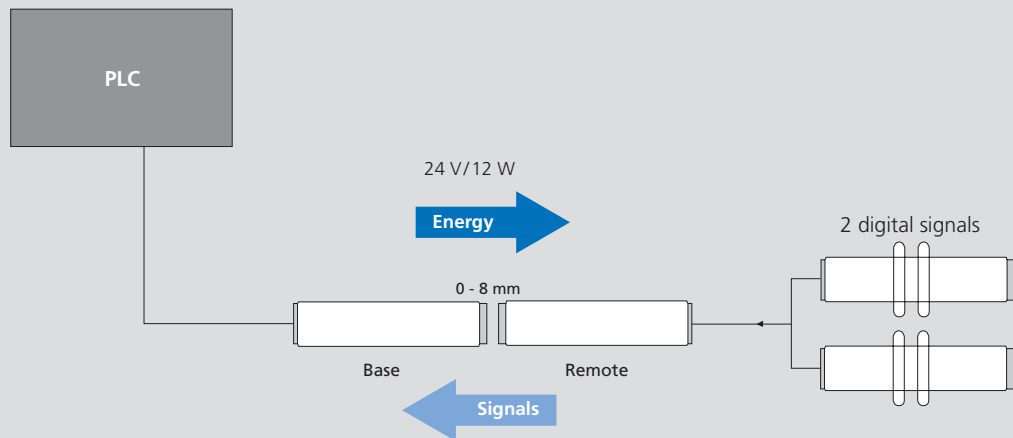

Subject to technical changes.
For more detailed information please ask our customer service.



| Function Base | |
|---------------------|--|
| LED Power | |
| Color | Green / red |
| Function | Off » Unit not supplied with voltage (or undervoltage) |
| | On (green) » 24 V ok and remote unit has been detected |
| | Flashes 2 Hz green » 24 V ok but no remote unit detected |
| | Flashes 1 Hz green / red » Incompatible remote unit detected |
| | Flashes 2 Hz red » Foreign object detected |
| LED Signal 1 | |
| Color | Yellow |
| Function | Off » Digital input 1 is not connected or no remote unit detected |
| | On » Digital input 1 is connected |
| | Flashes 2 Hz » Digital input connected but short circuit at the output |
| | Flashes 5 Hz » Overload voltage output remote unit |
| LED Signal 2 | |
| Color | Yellow |
| Function | Out » Digital input 2 is not connected or no remote unit detected |
| | On » Digital input 2 is connected |
| | Flashes 2 Hz » Digital input connected but short circuit at the output |
| | Flashes 5 Hz » Overload voltage output remote unit |

| Function Remote | |
|---------------------|---|
| LED Coupling | |
| Color | Green / red |
| Function | Off » Unit is not connected |
| | On (green) » Unit is connected, voltage output DC 24 V ok |
| | Flashes 2 Hz red » Unit is connected but short circuit at DC 24 V |
| | Flashes 5 Hz red » Internal error |
| LED Signal 1 | |
| Color | Yellow |
| Function | Off » Digital input 1 is not connected |
| | On » Digital input 1 is connected |
| LED Signal 2 | |
| Color | Yellow |
| Function | Off » Digital input 2 is not connected |
| | On » Digital input 2 is connected |


- Stationary Unit - Base
- Mobile Unit - Remote

Axial coupler

Base / Remote:

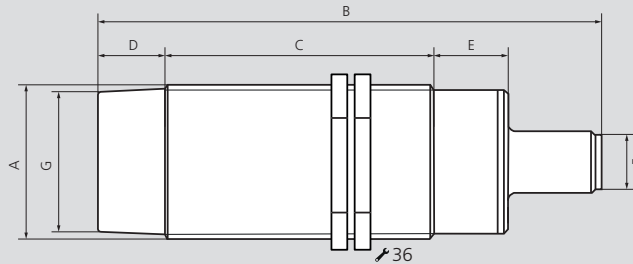

Male connector 5-pin
M 12 x 1



Female connector 4-pin
M 12 x 1

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system 30-2

| SMW-electronics Type | | Base | Remote |
|--|-----|--------------------|------------------------------|
| Id. No. | | 0E011600 | 0E011601 |
| A | mm | M30 x 1.5 | |
| B | mm | 98 | |
| C | mm | 52 | |
| D | mm | 13 | |
| E | mm | 14.5 | |
| F | mm | M12 x 1 / Male | M12 x 1 / Female |
| G | mm | Ø 27 | |
| Housing material | | 1.4301/PA66 GF30 | |
| Protection class | | IP 67 | |
| Operating temperature | | -20°C ... +60°C | |
| Storage temperature | | -20°C ... +80°C | |
| Transmission distance | | 0 mm ... 8 mm | |
| Operating voltage | | 24 V (18 ... 30 V) | - |
| Output voltage | | - | 24 V ± 10% DC |
| Power consumption (Base) | | < 1.5 A | - |
| Power output (Remote) | | - | < 500 mA (750 mA short term) |
| Overload protection / short circuit protection | | ✓ | ✓ |
| Residual ripple | | - | < 200 mV |
| Reverse polarity protection | | ✓ | - |
| Temperature monitoring | | ✓ | ✓ |
| Data-Valid Output | | 150 mA | - |
| Ready delay | | < 300 ms | |
| PIN assignment | PIN | Signal Base | Signal Remote |
| Supply voltage | 1 | 24 V IN | 24 V OUT |
| Digital signal | 2 | 0/24 V OUT | 0/24 V IN |
| Ground | 3 | GND | GND |
| Digital signal | 4 | 0/24 V OUT | 0/24 V IN |
| Data-Valid | 5 | DAV 24 V | - |




Application/customer benefits

- Contact free, safe transmission of energy and signals between moving / rotating and stationary components
- Application examples: Supply of sensors, supply and monitoring of remote systems
- Dynamic Pairing
- Wear and maintenance free
- Protection functions: Temperature monitoring, foreign object detection, reverse polarity protection
- Multilevel LED function display with good Visibility

Technical features

- Mounting M30 x 1.5
- Operating voltage 24 V (18 ... 30 V)
- Transmission distance 0 - 8 mm
- Transmission of energy: 24 V / 12 W (500 mA)
- Transmission of signals: 8 digital signals (PNP)
- Connection: Remote female connector M12 (12-pin), base male connector M12 (12-pin)
- Protection class IP 67
- Id. No. Base: 0E011602, Id. No. Remote: 0E011603

Block diagram:

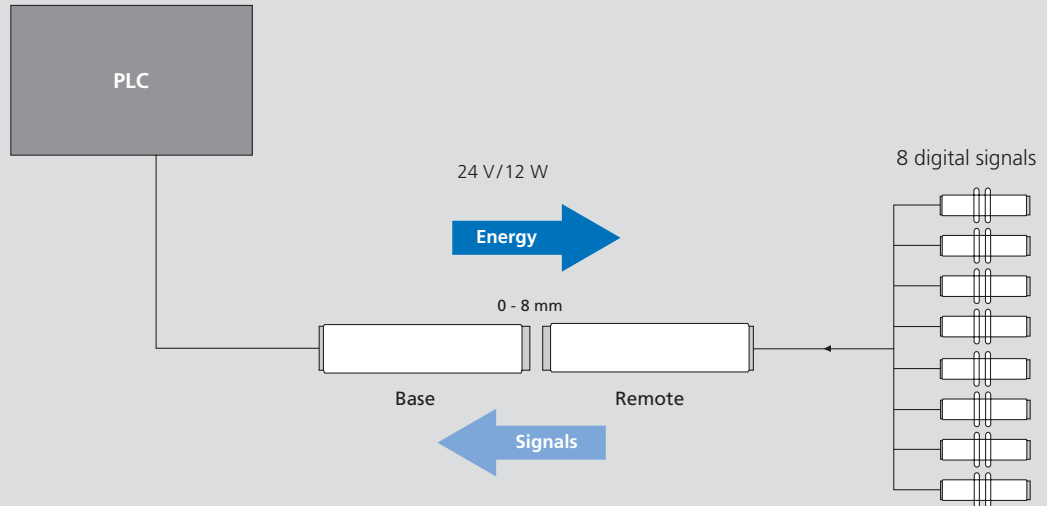


Subject to technical changes.
For more detailed information please ask our customer service.

| Function Base | | Function Remote | |
|-----------------------|--|---------------------|--|
| LED Power | | LED Coupling | |
| Color | Green / red | Color | Green / red |
| Function | Off » Unit not supplied with Voltage (or under Voltage) | Function | Off » Unit not connected |
| | On (green) » 24 V ok and mobile unit has been detected | | On (green) » Unit connected, Voltage output DC 24 V ok |
| | Flashes 2 HZ green » 24 V ok but no mobile unit detected | | Flashes 2 HZ red » Unit connected but short circuit at DC 24 V |
| | Flashes 1 HZ green / red » Incompatible mobile unit detected | | Flashes 5 HZ red » Internal error |
| | Flashes 2 HZ red » Foreign object detected | | |
| | Flashes 5 HZ red » Internal error | | |
| LED Data Valid | | | |
| Color | Yellow | | |
| Function | Off » No mobile unit detected | | |
| | On » Mobile unit detected and signals are transmitted | | |
| | 2 HZ » Short circuit on at least one of the outputs | | |
| | Flashes 5 HZ » Overload Voltage output mobile unit | | |


- Stationary Unit - Base
- Mobile Unit - Remote

Axial coupler

Base / Remote:

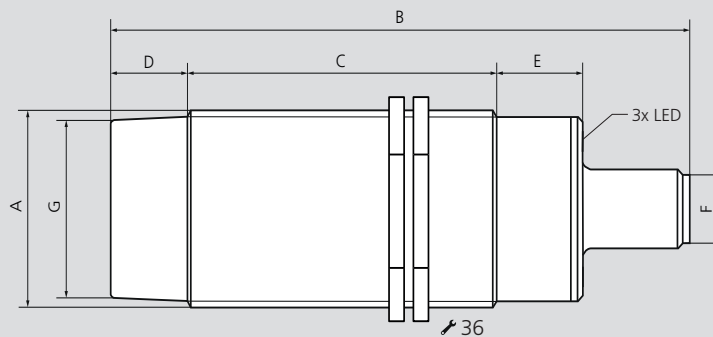


Base



Male connector 12-pin
M 12 x 1

Remote



Female connector 12-pin
M 12 x 1

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system M30-8

| SMW-electronics Type | Base | | Remote |
|--|--------------------|----------------|------------------|
| Id. No. | 0E011602 | | 0E011603 |
| A | mm | M30 x 1.5 | |
| B | mm | 98 | |
| C | mm | 52 | |
| D | mm | 13 | |
| E | mm | 14.5 | |
| F | mm | M12 x 1 / Male | M12 x 1 / Female |
| G | mm | Ø 27 | |
| Housing material | 1.4301/PA 66 GF30 | | |
| Protection class | IP 67 | | |
| Operating temperature | -20°C ... +80°C | | |
| Storage temperature | -20°C ... +80°C | | |
| Transmission distance | 0 mm ... 8 mm | | |
| Operating voltage | 24 V (18 ... 30 V) | | - |
| Output voltage | - | | 24 V ± 10% DC |
| Power consumption (Base) | < 1,5 A | | - |
| Power output (Remote) | - | | < 100 mA |
| Overload protection / short circuit protection | ✓ | | ✓ |
| Residual ripple | - | | < 200 mV |
| Reverse polarity protection | ✓ | | - |
| Temperature monitoring | ✓ | | ✓ |
| Data-Valid Output | 150 mA | | - |
| Ready delay | < 300 ms | | |
| PIN assignment | PIN | Signal Base | Signal Remote |
| Supply voltage | 1 | 24 V IN | 24 V OUT |
| Digital signal 1 | 2 | 0/24 V OUT | 0/24 V IN |
| Digital signal 2 | 3 | 0/24 V OUT | 0/24 V IN |
| Digital signal 3 | 4 | 0/24 V OUT | 0/24 V IN |
| Digital signal 4 | 5 | 0/24 V OUT | 0/24 V IN |
| Digital signal 5 | 6 | 0/24 V OUT | 0/24 V IN |
| Digital signal 6 | 7 | 0/24 V OUT | 0/24 V IN |
| Digital signal 7 | 8 | 0/24 V OUT | 0/24 V IN |
| Digital signal 8 | 9 | 0/24 V OUT | 0/24 V IN |
| Ground | 10 | GND | GND |
| Data-Valid | 11 | DAV 24 V | - |
| - | 12 | - | - |

Axial coupler

■ Contact free transmission of energy and signals




Application/customer benefits

- Contact free, safe transmission of energy and signals between moving / rotating and stationary components
- Application examples: Supply of sensors, Supply and monitoring of remote systems
- Dynamic Pairing
- Wear and maintenance free
- Protective function: Temperature monitoring, foreign object detection, reverse polarity protection
- Multi-level LED with good visibility

Technical features

- Mounting M30 x 1.5
- Operating voltage 24 V (18 ... 30 V)
- Transmission distance 0 - 10 mm
- Transmission of energy: 24 V / 12 W (500 mA) with a distance of 0 - 7 mm
- Transmission of signals: IO-Link (COM1, COM2, COM3), 1 digital signal
- Connection: Base male connector M12 (5-pin), remote female connector M12 (4-pin)
- Protection class IP 67
- Id. No. Base: 0E011604, Id. No. Remote: 0E011605

Block diagram:

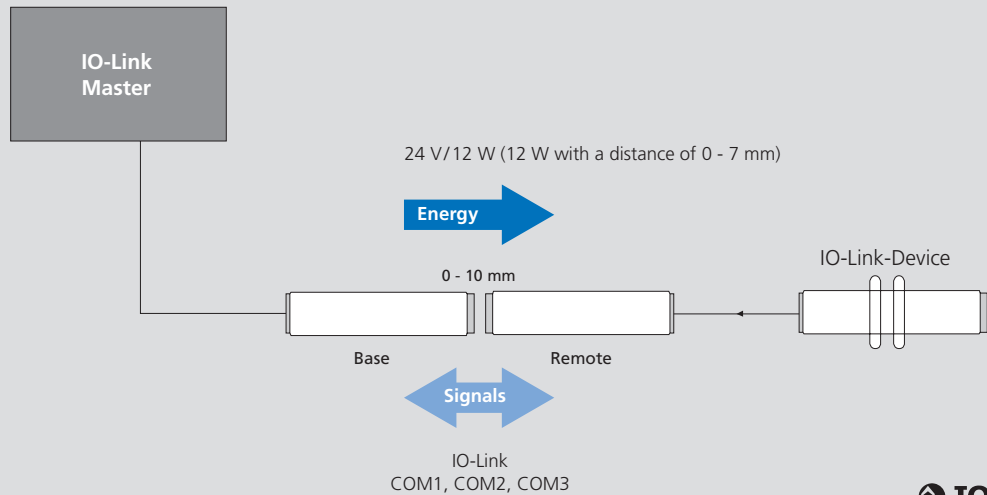

Subject to technical changes.
For more detailed information please ask our customer service.




| Function Base | | Function Remote | |
|-----------------------------------|---|--------------------|--|
| LED Power | | LED Power | |
| Color | Green / red | Color | Green / red |
| Function | Off » Unit not supplied with voltage (or undervoltage) | Function | Off » Unit is not connected |
| | On (green) » 24 V ok and mobile unit has been detected | | On (green) » Unit coupled, voltage output DC 24 V ok |
| | Flashes 2 Hz green » 24 V ok but no mobile unit detected | | Flashes 2 Hz red » Connected but short-circuited at DC 24 V |
| | Flashes 1 Hz red / green » Incompatible mobile unit detected | | Flashes 5 Hz red » Internal error |
| | Flashes 2 Hz red » Foreign object detected | | |
| Flashes 5 Hz red » Internal error | | | |
| LED IO-Link | | LED IO-Link | |
| Color | Green / yellow | Color | Green / yellow |
| Function | Green » Signals IO-Link Operation | Function | Green » Signals IO-Link operation according to IO-Link specification (1000 ms on / 100 ms off) |
| | Green » On (SIO Mode Signal on) | | Green » On (SIO Mode Signal on) |
| | Green » Off (SIO Mode Signal off) | | Green » Off (SIO Mode Signal off) |
| | Flashes 2 Hz red » Short circuit at the IO-Link PIN | | Flashes 2 Hz red » Short circuit at the IO-Link PIN |
| | Flashes 5 Hz red » Overload voltage output remote unit | | Flashes 5 Hz red » Overload voltage output mobile unit |
| LED Signal | | LED Signal | |
| Color | Yellow | Color | Yellow |
| Function | Off » Digital input is not connected or no mobile unit detected | Function | Off » Digital input 2 is not connected or no mobile unit detected |
| | On » Digital input is connected | | On / yellow » Digital input 2 is connected |
| | Flashes 2 Hz » Digital input is connected but short circuit at the output | | |
| | Flashes 5 Hz » Overload voltage output mobile unit | | |


- Stationary Unit - Base
- Mobile Unit - Remote

Axial coupler


Base / Remote

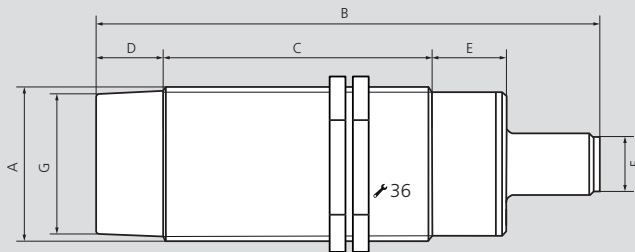

Display Base LED




Base




Male connector 5-pin
M 12 x 1

Display Remote LED



Remote



Female connector 4-pin
M 12 x 1

| Number | LED | Color |
|--------|------------|--------------|
| 1 | Power LED | Green / Red |
| 2 | Signal LED | Yellow |
| 3 | IOL LED | Yellow / Red |

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system M30-IOL

| SMW-electronics Type | | Base | Remote |
|--|----|--------------------------------------|------------------|
| Id. No. | | 0E011604 | 0E011605 |
| A | mm | M30 x 1.5 | |
| B | mm | 96 | 94 |
| C | mm | 52 | |
| D | mm | 13 | |
| E | mm | 18 | |
| F | mm | M12 x 1 / Male | M12 x 1 / Female |
| G | mm | Ø 27 | |
| Housing material | | CrNi, PA66, PC GF30% | |
| Protection class | | IP 67 | |
| Operating temperature | | -20°C ... +50°C | |
| Storage temperature | | -20°C ... +80°C | |
| Transmission distance | | 0 mm ... 10 mm (12 W: 0 mm ... 7mm)* | |
| Operating voltage | | 24 V (18 ... 30 V) | - |
| Output voltage | | - | 24 V ± 10% DC |
| Power consumption (Base) | | 1500 mA | - |
| Power output (Remote) | | - | 500 mA |
| Overload protection / short circuit protection | | ✓ | ✓ |
| Residual ripple | | - | < 200 mV |
| Reverse polarity protection | | ✓ | - |
| Temperature monitoring | | ✓ | ✓ |
| Data-Valid Output | | 150 mA | - |
| Ready delay | | < 600 ms | |
| PIN assignment | | Signal Base | Signal Remote |
| Supply voltage | 1 | 24 V IN | 24 V OUT |
| Digital signal | 2 | 0/24 V OUT | 0/24 V IN |
| Ground | 3 | GND | GND |
| IO-Link Signal | 4 | IO-Link CQ | IO-Link CQ |
| Data-Valid | 5 | DAV 24 V | - |

* V in ≥ 22 V Base



Application/customer benefits

- Contact free, safe transmission of energy and signals between moving / rotating and stationary components
- Application examples: Process monitoring edibles, manufacturing of plastic, test engineering, machine tools
- Dynamic Pairing
- Wear and maintenance free
- Operating display


Technical features

- Mounting M30 x 1.5
- Operating voltage 24 V ± 10%
- Transmission distance 0 - 4 mm
- Transmission of energy: 24 V / 6 W (250 mA)
- Transmission of signals: 4 analog signals (4 - 20 mA / 0 - 10 V)
- Inverse-polarity protection (base), short-circuit proof (remote)
- Ports: Base male connector M12 (12-pin), remote female connector M12 (12-pin)
- Protection class: IP 67
- LED interface (base)

| | |
|----------------|--------------------------|
| color: | green |
| slow flashing: | power on |
| static: | in position |
| fast flashing: | overload / short circuit |

- Id. No. Base (4 x 0 - 10 V): 0E010958
- Id. No. Remote (4 x 0 - 10 V): 0E010959
- Id. No. Base (4 x 4 - 20 mA): 0E010960
- Id. No. Remote (4 x 4 - 20 mA): 0E010961

Block diagram:

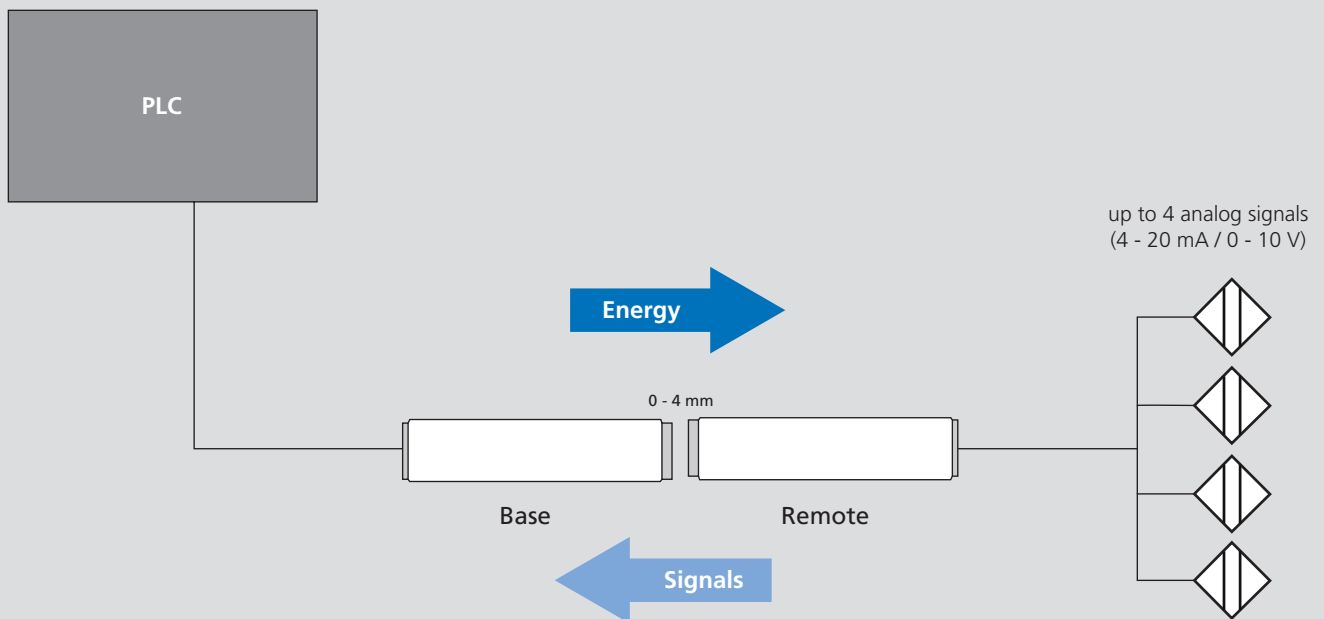


Subject to technical changes.
For more detailed information please ask our customer service.


- Stationary Unit - Base
- Mobile Unit - Remote

Axial coupler

Base / Remote:

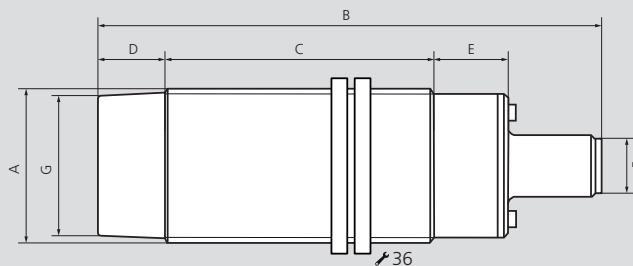


Base



Male connector 12-pin
M 12 x 1

Remote



Female connector 12-pin
M 12 x 1

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system M30-4A

| SMW-electronics Type | Base 0 ... 10 V | Remote 0 ... 10 V | Base 4 ... 20 mA | Remote 4 ... 20 mA | |
|--|-----------------------|---------------------|------------------------|------------------------|---------------------|
| Id. No. | 0E010958 | 0E010959 | 0E010960 | 0E010961 | |
| A | mm | M30 x 1.5 | | | |
| B | mm | 98 | | | |
| C | mm | 52 | | | |
| D | mm | 13 | | | |
| E | mm | 14.5 | | | |
| F | mm | M12 | M12 / Female connector | M12 / Female connector | |
| G | mm | Ø 27 | | | |
| Housing material | CuZn, PA66, PC GF 30% | | | | |
| Protection class | IP 67 | | | | |
| Operating temperature | 0° C ... +60° C | | | | |
| Storage temperature | -10 °C ... +80° C | | | | |
| Transmission distance | 0 mm ... 4 mm | | | | |
| Operating voltage | 24 V ± 10% DC | - | 24 V ± 10% DC | - | |
| Output voltage | - | 24V ± 10% DC | - | 24 V ± 10% DC | |
| Power consumption (Base) | < 500 mA | - | < 500 mA | - | |
| Power output (Remote) | - | 250 mA | - | 250 mA | |
| Overload protection / short circuit protection | ✓ | ✓ | ✓ | ✓ | |
| Residual ripple | - | < 200 mV | - | < 200 mV | |
| Reverse polarity protection | ✓ | - | ✓ | - | |
| Data-Valid Output | max. 100 mA | - | max. 100 mA | - | |
| Data-Valid Visual | ✓ | - | ✓ | - | |
| Operational readiness | < 100 ms | | | | |
| PIN assignment | PIN | Signal Base | Signal Remote | Signal Base | Signal Remote |
| Supply voltage | 1 | +24 V IN | +24 V OUT | +24 V IN | +24 V OUT |
| Analog signal 1 | 2 | CH 1 0 ... 10 V OUT | CH 1 0 ... 10 V IN | CH 1 4 ... 20 mA OUT | CH 1 4 ... 20 mA IN |
| Ground connection 1 | 3 | GND | GND | GND | GND |
| Analog signal 2 | 4 | CH 2 0 ... 10 V OUT | CH 2 0 ... 10 V IN | CH 2 4 ... 20 mA OUT | CH 2 4 ... 20 mA IN |
| Ground connection 2 | 5 | GND | GND | GND | GND |
| Analog signal 3 | 6 | CH 3 0 ... 10 V OUT | CH 3 0 ... 10 V IN | CH 3 4 ... 20 mA OUT | CH 3 4 ... 20 mA IN |
| Ground connection 3 | 7 | GND | GND | GND | GND |
| Analog signal 4 | 8 | CH 4 0 ... 10 V OUT | CH 4 0 ... 10 V IN | CH 4 4 ... 20 mA OUT | CH 4 4 ... 20 mA IN |
| Ground connection 4 | 9 | GND | GND | GND | GND |
| Ground | 10 | GND | GND | GND | GND |
| | 11 | NC | NC | NC | NC |
| *0 = no remote detected / 24 V = remote detected | 12 | *Data-Valid OUT | NC | NC | NC |

* Only with inductive coupler M30-4A Base 0 ... 10 V



Application/customer benefits


- Contact free, safe transmission of energy and signals between moving / rotating and stationary components
- Application examples: Automation, piloting of magnet valves, reading of status signals, online monitoring of sensor signals in the remote area, contacting at rotary tables, plug replacement for SPS signals
- Dynamic Pairing
- Wear and maintenance free
- Operating display

Technical features

- Mounting M30 x 1.5
- Operating voltage 24 V \pm 10%
- Transmission distance 0 - 4 mm
- Transmission of energy: 24 V / 12 W (500 mA)
- Transmission of signals: 8 + 8 digital (bidirectional)
- Inverse-polarity protection (base), short-circuit proof (remote)
- Connection: Base male connector M16 (19-pin), remote female connector M16 (19-pin)
- Protection class: IP 67
- Id. No. Base: 0E010964, Id. No. Remote: 0E010965
- LED interface (base)

| | |
|----------------|--------------------------|
| color: | green |
| slow flashing: | power on |
| static: | in position |
| fast flashing: | overload / short-circuit |

Block diagram:


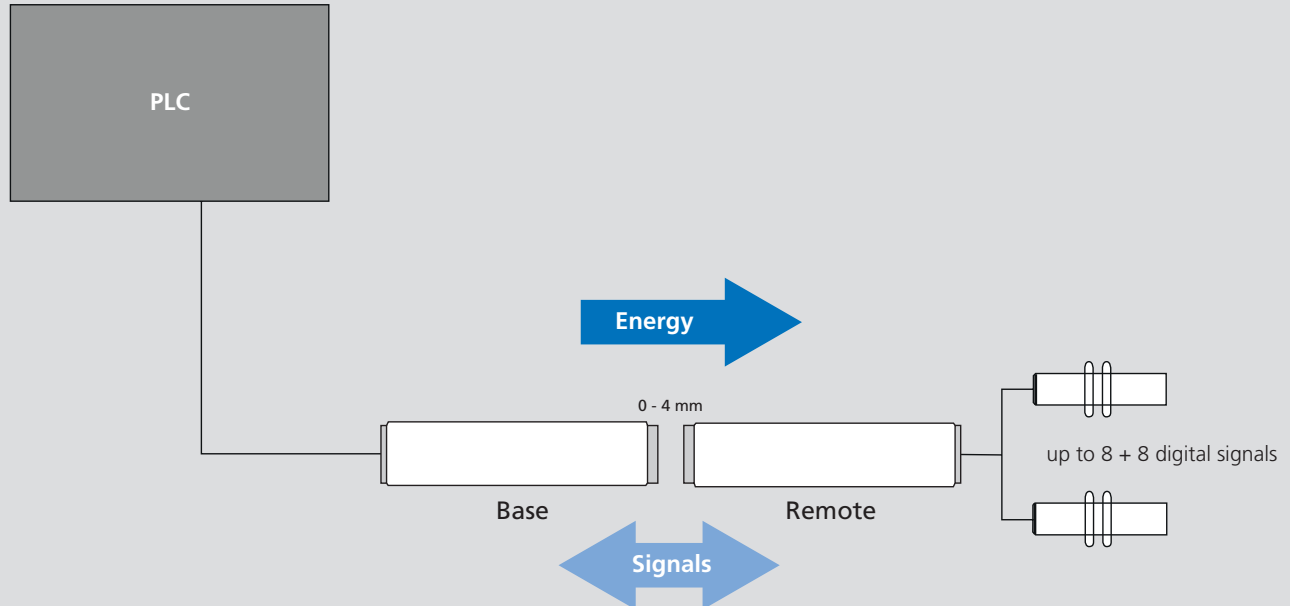


Subject to technical changes.
For more detailed information please ask our customer service.


- Stationary Unit - Base
- Mobile Unit - Remote

Axial coupler

Base / Remote:

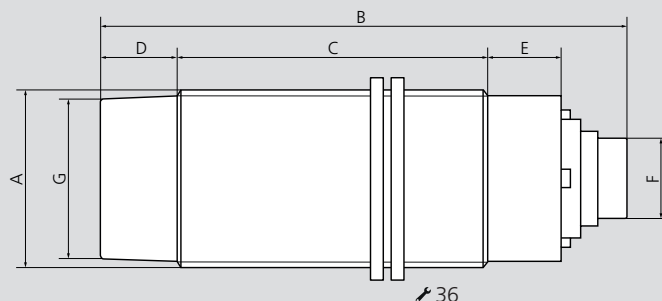

Male connector 19-pin
M 16



Female connector 19-pin
M 16

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system M30-8+8

| SMW-electronics Type | | Base | Remote |
|----------------------|----|-----------|--------------|
| Id. No. | | 0E010964 | 0E010965 |
| A Thread | mm | M30 x 1.5 | |
| B | mm | 88.5 | 81 |
| C | mm | 52 | |
| D | mm | 13 | |
| E | mm | 14.5 | |
| F | mm | M16 | M16 / Buchse |
| G | mm | Ø 27 | |




| | |
|------------------------------|-----------------------|
| Housing material | CuZn, PA66, PC GF 30% |
| Protection class | IP 67 |
| Operating temperature | 0°C ... +50°C |
| Storage temperature | -10° ... +70°C |
| Coupling distance | 0 mm ... 4 mm |

| | | |
|--|---------------|---------------|
| Operating voltage | 24 V ± 10% DC | - |
| Output voltage | - | 24 V ± 10% DC |
| Power consumption (Base) | < 500 mA | - |
| Power output (Remote) | - | < 500 mA |
| Overload protection / short circuit protection | ✓ | ✓ |
| Residual ripple | - | < 200 mV |
| Reverse polarity protection | ✓ | - |
| Data-Valid Output | max. 100 mA | - |
| Ready delay | < 80 ms | < 100 ms |

| PIN assignment | PIN | Signal Base | Signal Remote | PIN assignment | PIN | Signal Base | Signal Remote |
|------------------|-----|-------------|---------------|------------------|-----|-------------|---------------|
| Digital signal 8 | A | 0/24 V IN | 0/24 V OUT | Digital signal 8 | L | 0/24 V OUT | 0/24 V IN |
| Digital signal 7 | B | 0/24 V IN | 0/24 V OUT | Ground | M | GND | GND |
| Digital signal 5 | C | 0/24 V IN | 0/24 V OUT | Digital signal 6 | N | 0/24 V IN | 0/24 V OUT |
| Digital signal 3 | D | 0/24 V IN | 0/24 V OUT | Digital signal 4 | O | 0/24 V IN | 0/24 V OUT |
| Digital signal 2 | E | 0/24 V IN | 0/24 V OUT | Digital signal 1 | P | 0/24 V IN | 0/24 V OUT |
| Data-Valid | F | DAV 24 V | - | Digital signal 1 | R | 0/24 V OUT | 0/24 V IN |
| Digital signal 2 | G | 0/24 V OUT | 0/24 V IN | Digital signal 4 | S | 0/24 V OUT | 0/24 V IN |
| Digital signal 3 | H | 0/24 V OUT | 0/24 V IN | Digital signal 6 | T | 0/24 V OUT | 0/24 V IN |
| Digital signal 5 | I | 0/24 V OUT | 0/24 V IN | Voltage | U | 24 V IN | 24 V OUT |
| Digital signal 7 | K | 0/24 V OUT | 0/24 V IN | | | | |

■ For Inductive couplers M30, M18 and M12

Mounting bracket for inductive coupler M30

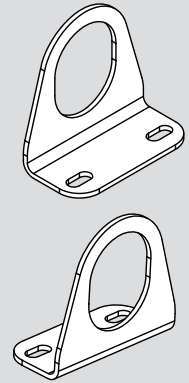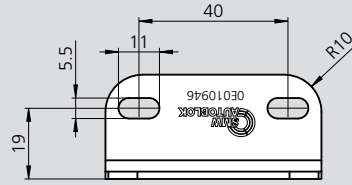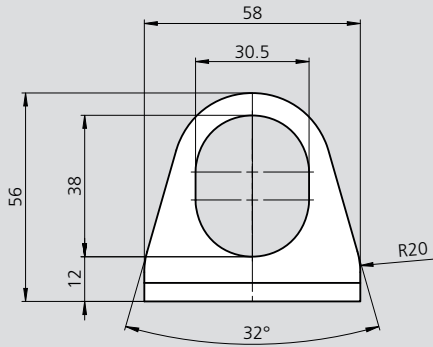

Scope of delivery: 1 piece




SMW-electronics Type

Id. No.

Mounting bracket M30

0E010946

Mounting bracket for inductive coupler M18

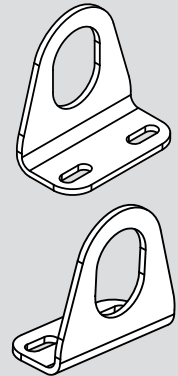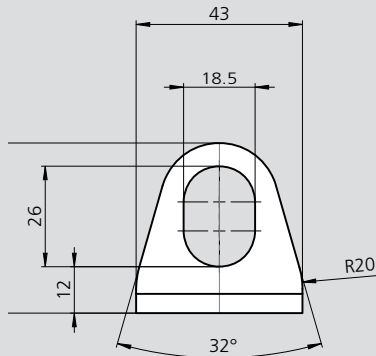

Scope of delivery: 1 piece




SMW-electronics Type

Id. No.

Mounting bracket M18

0E010947

Mounting bracket for inductive coupler M12

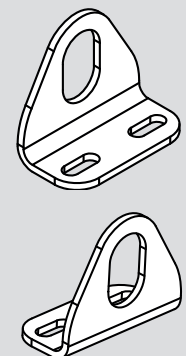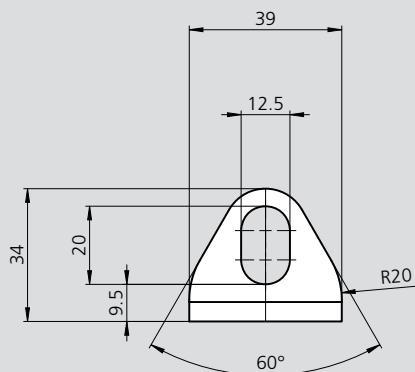

Scope of delivery: 1 piece

SMW-electronics Type

Id. No.

Mounting bracket M12

0E010948



Application/customer benefits

- Wireless axial transmission of energy and data between stationary and moving components
- Customization of the geometry and data transfer for the best possible integration
- Designed for permanent use
- Wear and maintenance free

Technical features

- Energy transfer: Up to 1500 W
- Possible signal transfer:
 - Analog signals (0 - 10 V / 4 - 20 mA)
 - Temperature signals (PT100)
 - Digital signals / PNP signals
 - Field bus (CAN, Profibus, RS485, RS232)
 - IO-Link
 - Ethernet

Request form for individual customized adaptations

Please tick the selection that applies to you or enter your desired parameters in the fields provided and afterwards send the completed inquiry form to info@smw-electronics.de

Specifications - Mechanics

| | | | | | | | | | | | | | |
|--------------------------|--------------------------|--------------------------|-------------------|--------------------------|-------------------|--------------------------|---------------|--------------------------|---------------------------|--------------------------|-----------------------------|--------------------------|---------------|
| <input type="checkbox"/> | Axial Cylindrical | <input type="checkbox"/> | Axial Disc | <input type="checkbox"/> | Axial Ring | <input type="checkbox"/> | Radial | <input type="checkbox"/> | Radial Ring / Ring | <input type="checkbox"/> | Axial Segment / Ring | <input type="checkbox"/> | Linear |
| | | | | | | | | | | | | | |
| ØA | | ØA | | ØA | | ØA | | ØA | | ØA | | L1 | |
| L1 | | | | ØI | | ØI | | ØI | | ØI | | L2 | |
| L2 | | | | | | | | | | | | | |

ØA = Outside diameter, ØI = Inside diameter, L1 = Length part 1, L2 Length part 2

Specifications - Electronics

Voltage 24 V Other

Type of supply Sensors Actuator technology Other

Distance mm

Signal transfer

| Signals / Interface | Quantity signals remote to base (unidirectional) | Quantity signals base to remote (bidirectional) |
|---------------------------------|--|---|
| Analog 0 - 10 V | | |
| Analog 4 - 20 mA | | |
| Temperature measurement / PT100 | | |
| Digital switching / SPS signals | | |
| IO Link | | |
| Ethernet < 100 MBit/s | | |
| CAN / BUS | | |
| Customized | | |

Ask our experts. We would be happy to provide you with an individual solution.
 You can reach us at the following email address: info@smw-electronics.de

LPS 4.0

Linear Position Sensor System

High-precision inductive linear position sensorsystem

Standard connection

M12 x 1 (5 Pole)



Common communication interfaces:

- IO-Link
- Analog signal (0 - 10 V/4 - 20 mA)


Status displays LEDs

- Operation and
- Target detection

Housing plastic Protection

class IP 67/69 K

Inductive position measurement by target / encoder unit

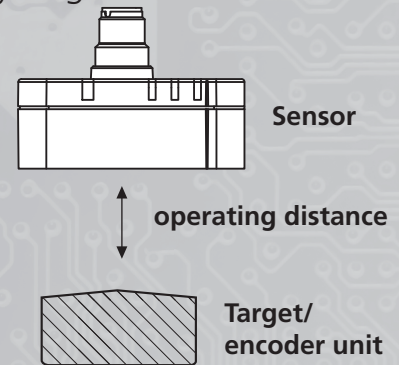


TARGET / ENCODER UNIT DESIGN


Required dimensions: LPS 4.0 48/80/120

| Dimensions | Remark |
|--------------------------------------|---|
| Operating distance A = 1.0 mm ± 0.25 | A = Required distance (light and parallel) between measuring surface and the operating ring |
| Width B = 19 mm | B = Required width of the operating cam or operating ring |
| Angle $\alpha = 6^\circ$ | α = Angle min. 6° |

Cam

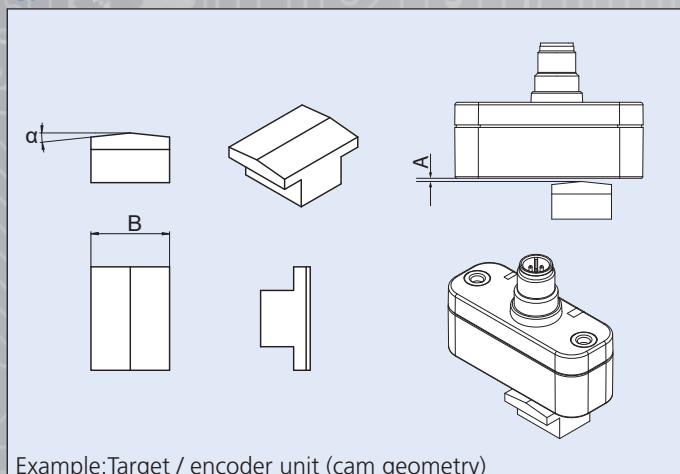


Ring

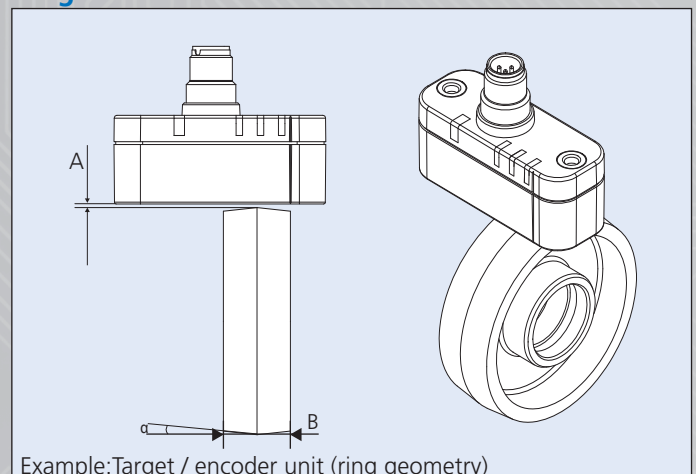

Application example

High-precision piston stroke sensing using LPS 4.0

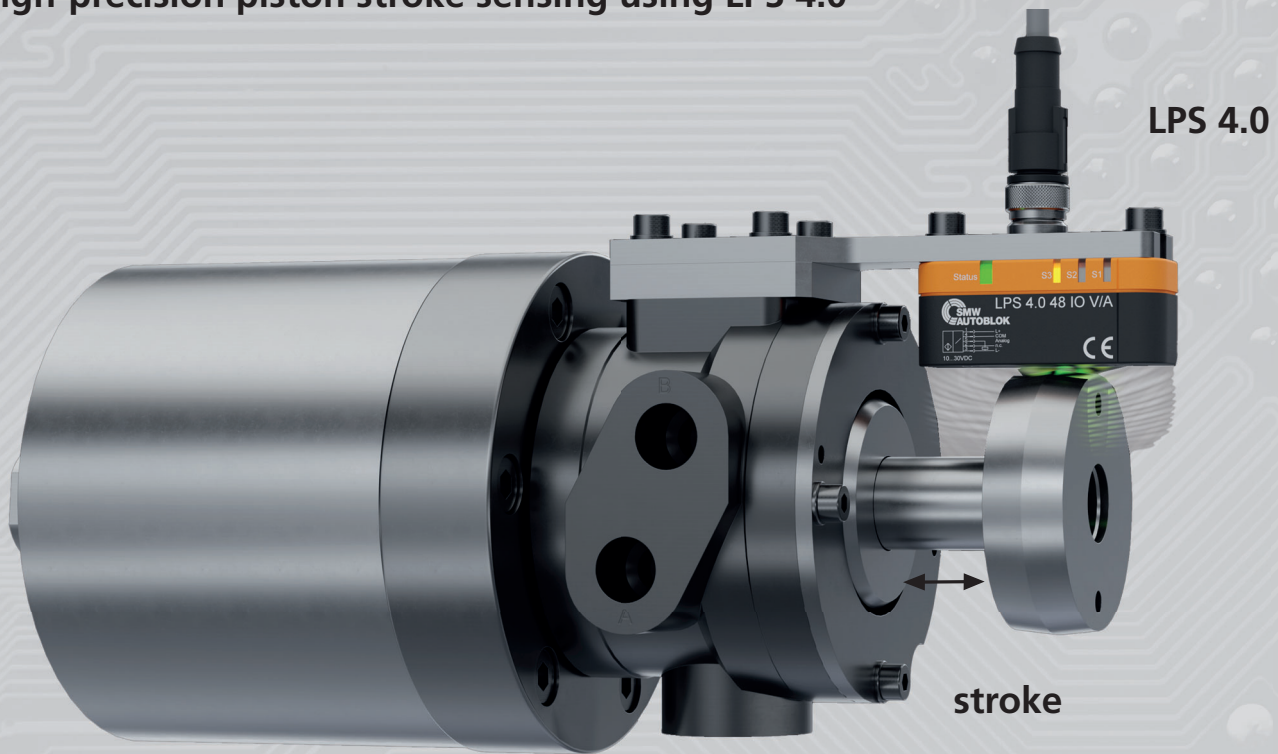

Clamping cylinder

Benefits:


- Measuring ranges from 0 - 120 mm
- Wear-free, due to contact free function
- Highest repeatability and precise positioning
- IO-Link and analog signal (0 - 10 V, 4 - 20 mA)
- Plug & Play integration
- Extremely robust + protected according to IP67/69K

TARGET / ENCODER UNIT DESIGN


Required dimensions: **LPS 4.0 14**

| Dimensions | Remark |
|--------------------------------------|---|
| Operating distance A = 1.0 mm ± 0.25 | A = Required distance (light and parallel) between measuring surface and the operating ring |
| Width B = 11 mm | B = Required width of the operating cam or operating ring |
| Angle $\alpha = 6^\circ$ | α = Angle min. 6° |

Cam

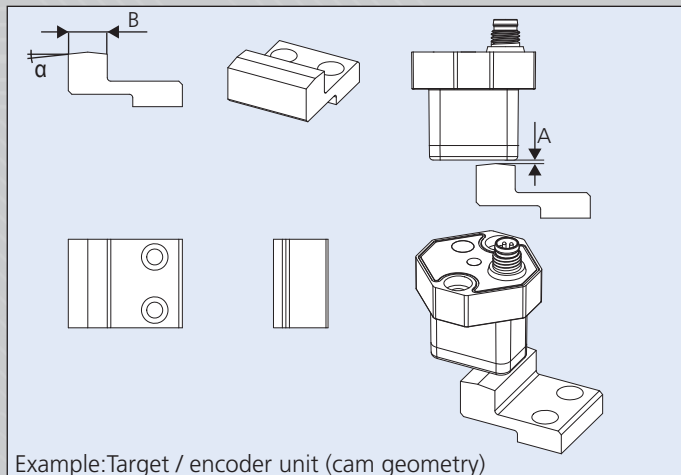

Ring

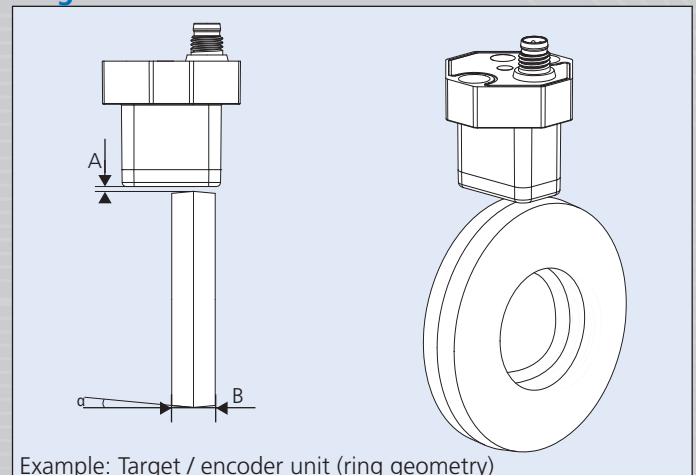

LPS 4.0 14 IO

Linear Position Sensor

Measuring range 14 mm



Application/customer benefits

- High precise inductive linear position measuring system
- Ready for Industry 4.0

Technical features






- Inductive measuring system
- No interference from magnetic fields
- Measuring range = 14 mm
- Compact design / simple installation
- Analog output 0 - 10 V (Id. No. 208106)
- IO-Link standard interface
- Protection class IP 67

Standard equipment

LPS 4.0 14 IO without cable

Ordering example


LPS 4.0 14 IO 0 - 10 V
Id. No. 208106
Cable with elbow plug 5 m
Id. No. 208241

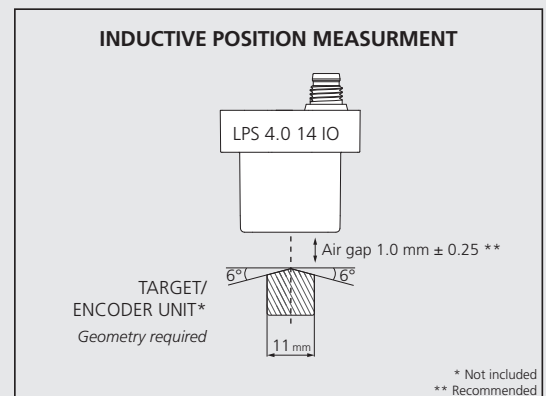

Pin Assignment

| Pin | Description |
|-----|------------------------|
| 1 | 24 V DC |
| 2 | Signal output 0 - 10 V |
| 3 | GND |
| 4 | C/Q (IO-Link) |


Male connector
M 8 x 1



Technical data

| SMW-AUTOBLOK Type | LPS 4.0 14 IO 0 - 10 V |
|--------------------------------|------------------------|
| Id. No. | 208106 |
| Measuring range | 14 mm |
| Output signal | 0 - 10 V |
| Power supply | 24 V DC |
| Repeat accuracy | ± 0.05 mm |
| Linearity | ± 0.20 mm |
| Temperature drift | 0.25 mm |
| Operating temperature | 10 - 60° |
| Protection class | IP 67 |
| Interface | IO-Link 1.0 |
| MTTF _a | 490 a |
| Mission time (T _M) | 20 a |
| Diagnostic Coverage (DC) | 0% |

| Cables for LPS 4.0 14 IO* | Length | Id. No. |
|---|--------|---------|
| Sensor connection cable straight plug M8 x 1 5-pin | 5 m | 208238 |
| | 10 m | 208239 |
| | 15 m | 208240 |
| Sensor connection cable elbow plug M8 x 1 5-pin | 5 m | 208241 |
| | 10 m | 208242 |
| | 15 m | 208243 |

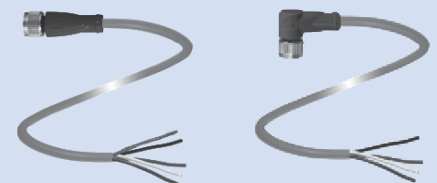

* Shielded PUR cable, 1 side cable end, 1 side with socket M8 x 1, machined and gold-plated contacts.



Application/customer benefits

- High precise inductive linear position measuring system
- Ready for Industry 4.0

Technical features



- Inductive measuring system
- No interference from magnetic fields
- Measuring range = 48 mm
- Compact design / simple installation
- Analog output 0 - 10V (Id. No. 208108) / 4 - 20mA (Id. No. 208107)
- IO-Link standard interface
- Protection class IP 67
- LEDs for operating status

Standard equipment

LPS 4.0 48 IO without cable

Ordering example


LPS 4.0 48 IO 0 - 10V
 Id. No. 208108
 Cable with elbow plug 5 m
 Id. No. 208247

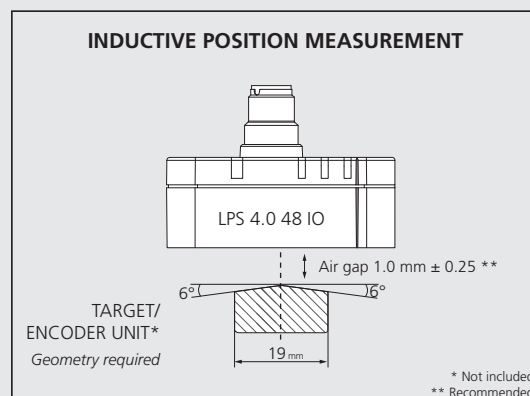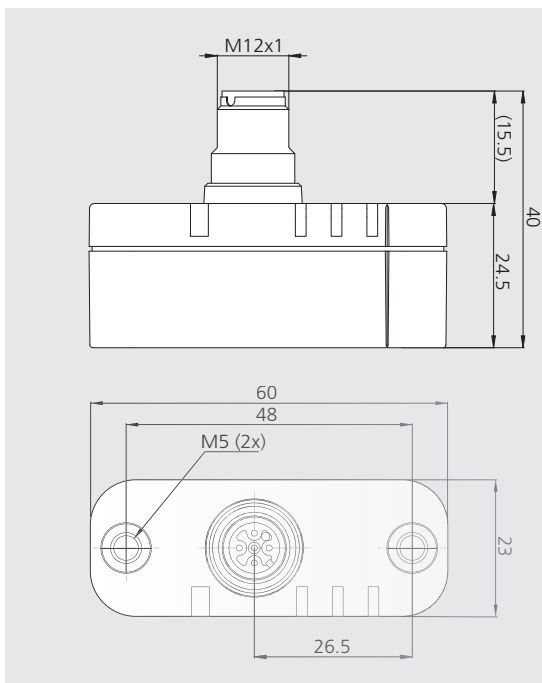

Pin Assignment

| Pin | Description |
|-----|---|
| 1 | 24 V DC |
| 2 | not used |
| 3 | GND |
| 4 | C/Q (IO-Link) |
| 5 | Signal output 0 - 10 V (Id. No. 208108) Signal output 4 - 20 mA (Id. No. 208107) |

Male connector
M 12 x 1



Technical data

| SMW-AUTOBLOK Type | LPS 4.0 48 IO 0 - 10 V | LPS 4.0 48 IO 4 - 20 mA |
|--------------------------------|------------------------|-------------------------|
| Id. No. | 208108 | 208107 |
| Measuring range | 48 mm | |
| Output signal | 0 - 10 V | 4 - 20 mA |
| Power supply | 24 V DC | |
| Repeat accuracy | ± 0.1 mm | |
| Linearity | ± 0.2 mm | |
| Temperature drift | 0.25 mm | |
| Operating temperature | 10 - 60° | |
| Protection class | IP 67 | |
| Interface | IO-Link 1.1 | |
| MTTF _a | 365 a | |
| Mission time (T _M) | 20 a | |
| Diagnostic Coverage (DC) | 0% | |

| Cables for LPS 4.0 48 IO* | Length | Id. No. |
|--|--------|---------|
| Sensor connection cable straight plug M12 x 1 5-pin | 5 m | 208244 |
| | 10 m | 208245 |
| | 15 m | 208246 |
| Sensor connection cable elbow plug M12 x 1 5-pin | 5 m | 208247 |
| | 10 m | 208248 |
| | 15 m | 208249 |



* Shielded PUR cable, 1 side cable end, 1 side with socket M12 x 1, machined and gold-plated contacts.

LPS 4.0 80 IO

Linear Position Sensor

Measuring range 80 mm



Application/customer benefits

- High precise inductive linear position measuring system
- Ready for Industry 4.0

Technical features



- Inductive measuring system
- No interference from magnetic fields
- Measuring range = 80 mm
- Compact design / simple installation
- Analog output 0 - 10 V / 4 - 20 mA
- IO-Link standard interface
- Protection class IP 67
- LEDs for operating status

Standard equipment

LPS 4.0 80 IO without cable


Ordering example

LPS 4.0 80 IO 0 - 10 V
 Id. No. 212001
 Cable with elbow plug 5 m
 Id. No. 208247

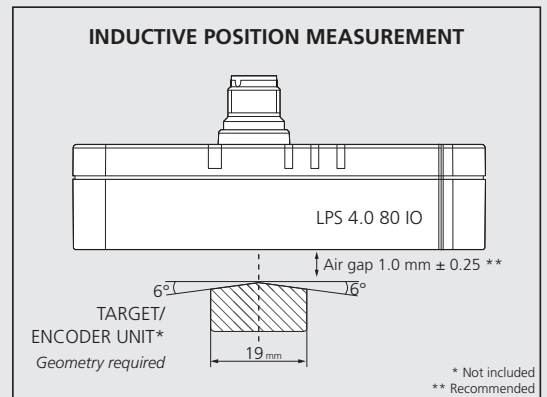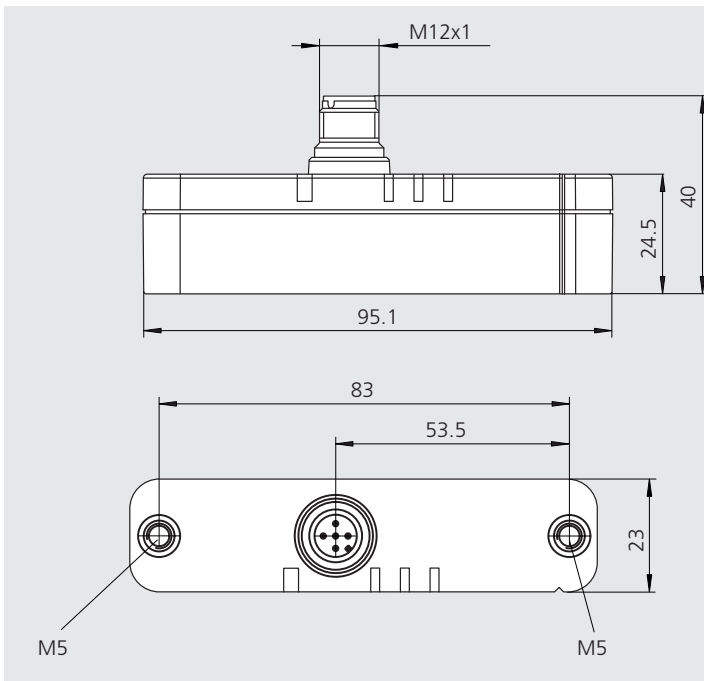

Pin Assignment


| Pin | Description |
|-----|---|
| 1 | 24 V DC |
| 2 | not used |
| 3 | GND |
| 4 | C/Q (IO-Link) |
| 5 | Signal output 0 - 10 V (Id. No. 212001) Signal output 4 - 20 mA (Id. No. 212000) |



Technical data

| SMW-AUTOBLOK Type | LPS 4.0 80 IO 0 - 10 V | LPS 4.0 80 IO 4 - 20 mA |
|--------------------------------|------------------------|-------------------------|
| Id. No. | 212001 | 212000 |
| Measuring range | 80 mm | |
| Output signal | 0 - 10 V | 4 - 20 mA |
| Power supply | 24 V DC | |
| Repeat accuracy | ± 0.1 mm | |
| Linearity | ± 0.2 mm | |
| Temperature drift | 0.25 mm | |
| Operating temperature | 10 - 60° | |
| Protection class | IP 67 | |
| Interface | IO-Link 1.1 | |
| MTTF _d | 311 a | |
| Mission time (T _M) | 20 a | |
| Diagnostic Coverage (DC) | 0% | |

| Cables for LPS 4.0 80 IO* | Length | Id. No. |
|--|--------|---------|
| Sensor connection cable straight plug M12 x 1 5-pin | 5 m | 208244 |
| | 10 m | 208245 |
| | 15 m | 208246 |
| Sensor connection cable elbow plug M12 x 1 5-pin | 5 m | 208247 |
| | 10 m | 208248 |
| | 15 m | 208249 |

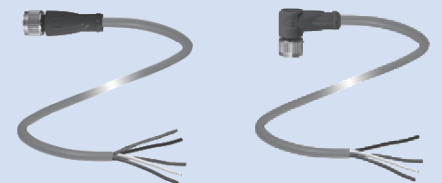

* Shielded PUR cable, 1 side cable end, 1 side with socket M12 x 1, machined and gold-plated contacts.



Application/customer benefits

- High precise inductive linear position measuring system
- Ready for Industry 4.0

Technical features



- Inductive measuring system
- No interference from magnetic fields
- Measuring range = 120 mm
- Compact design / simple installation
- Analog output 0 - 10V (Id. No. 208110) / 4 - 20mA (Id. No. 208109)
- IO Link standard interface
- Protection class IP 67
- LEDs for operating status

Standard equipment

LPS 4.0 120 IO without cable

Ordering example

LPS 4.0 120 IO 0 - 10V
 Id. No. 208110
 Cable with elbow plug 5 m
 Id. No. 208247

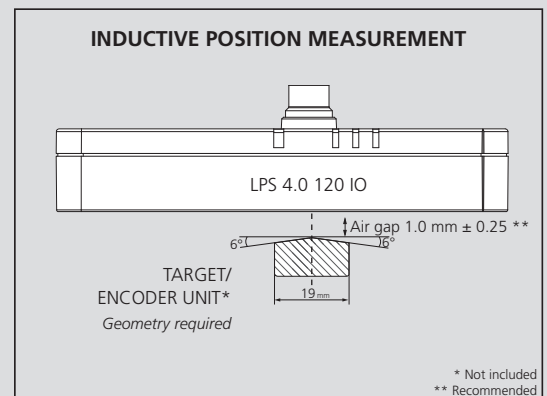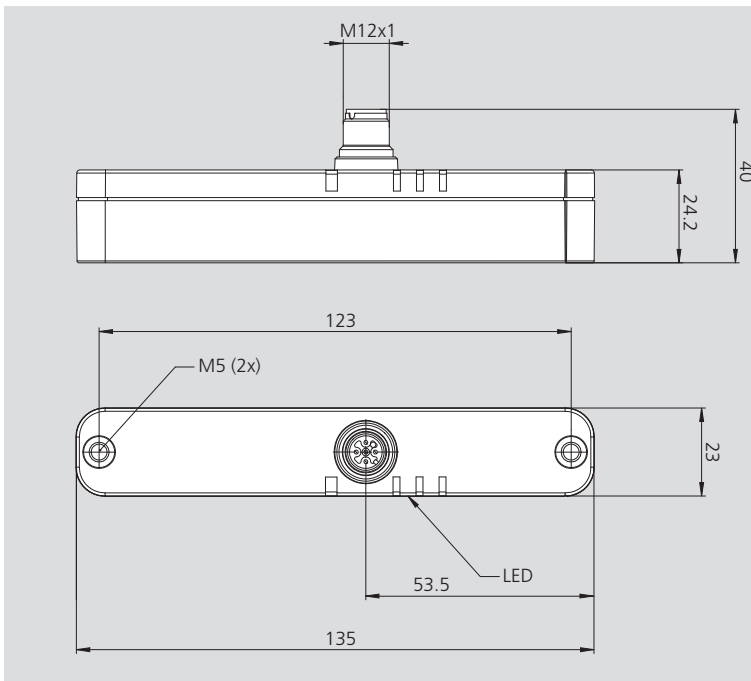

Pin Assignment


| Pin | Description |
|-----|---|
| 1 | 24V DC |
| 2 | not used |
| 3 | GND |
| 4 | C/Q (IO-Link) |
| 5 | Signal output 0 - 10V (Id. No. 208110) Signal output 4 - 20mA (Id. No. 208109) |



Technical data

| SMW-AUTOBLOK Type | LPS 4.0 120 IO 0 - 10 V | LPS 4.0 120 IO 4 - 20 mA |
|--------------------------------|-------------------------|--------------------------|
| Id. No. | 208110 | 208109 |
| Measuring range | | 120 mm |
| Output signal | 0 - 10 V | 4 - 20 mA |
| Power supply | | 24 V DC |
| Repeat accuracy | | ± 0.1 mm |
| Linearity | | ± 0.2 mm |
| Temperature drift | | 0.25 mm |
| Operating temperature | | 0 - 70° |
| Protection class | | IP 67 |
| Interface | | IO-Link 1.1 |
| MTTF _d | | 271 a |
| Mission time (T _M) | | 20 a |
| Diagnostic Coverage (DC) | | 0% |

| Cables for LPS 4.0 120 IO* | Length | Id. No. |
|--|--------|---------|
| Sensor connection cable straight plug M12 x 1 5-pin | 5 m | 208244 |
| | 10 m | 208245 |
| | 15 m | 208246 |
| Sensor connection cable elbow plug M12 x 1 5-pin | 5 m | 208247 |
| | 10 m | 208248 |
| | 15 m | 208249 |

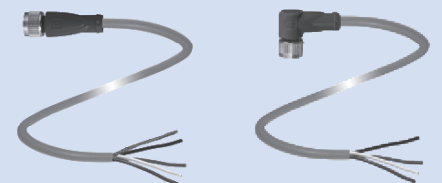

* Shielded PUR cable, 1 side cable end, 1 side with socket M12 x 1, machined and gold-plated contacts.

USP 4.0 250

Ultrasonic Positioning Sensor

Measuring range 25 - 250 mm



Application/customer benefits

- Non-contact distance measurement using ultrasonic technology
- Ready for Industry 4.0
- Selectable sound lobe width
- Analog output signal and adjustable switching signals
- Very large measuring range

Technical features

- Ultrasonic measuring system
- No interference from magnetic fields
- Measuring range = 25 - 250 mm
- Compact design / simple installation
- Analog output 0 - 10 V (Id.-Nr. 211501) / 4 - 20 mA (Id.-Nr. 211500)
- Protection class IP 67
- Reverse polarity protection


Standard equipment

USP 4.0

Ordering example

USP 4.0 20 - 250 mm
ID.-Nr. 211500


Function

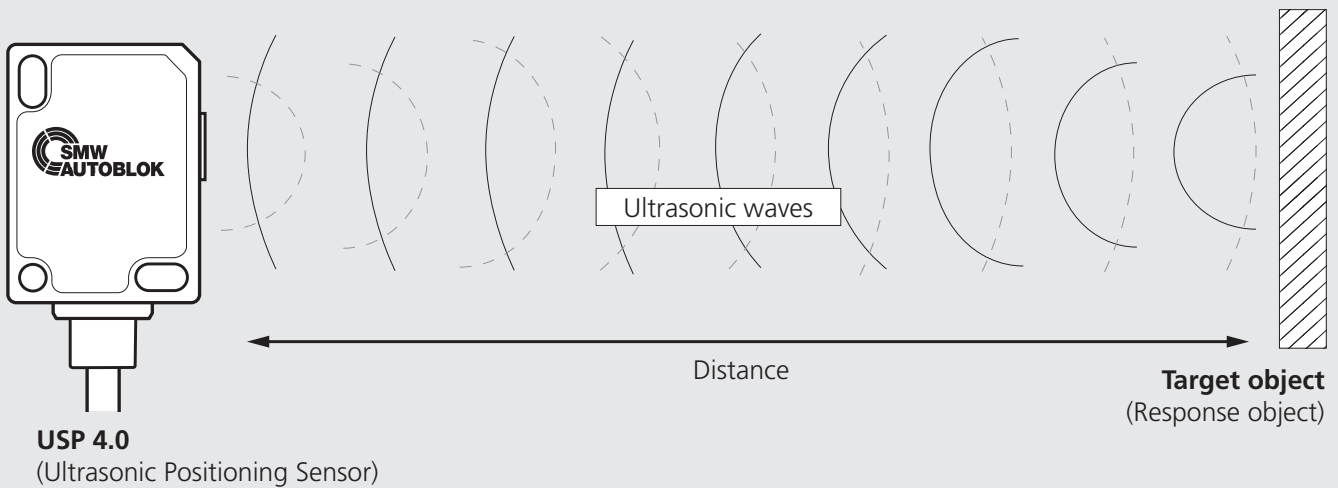


The **USP 4.0 Ultrasonic Positioning Sensor** measures the distance to objects without contact. The sensor emits ultrasonic waves. If these hit an object, they are reflected. The resulting echo is picked up by the sensor and the distance to the object is calculated from the time between the transmission and reception of the sound pulse.


The **USP 4.0 Ultrasonic Positioning Sensor** for distance measurement makes it possible to detect objects made of different materials such as metal, wood or plastic. Only sound-absorbing materials, such as absorbent cotton or smooth sloping surfaces, can be poorly detected by the ultrasonic sensor.

Characteristic response curve

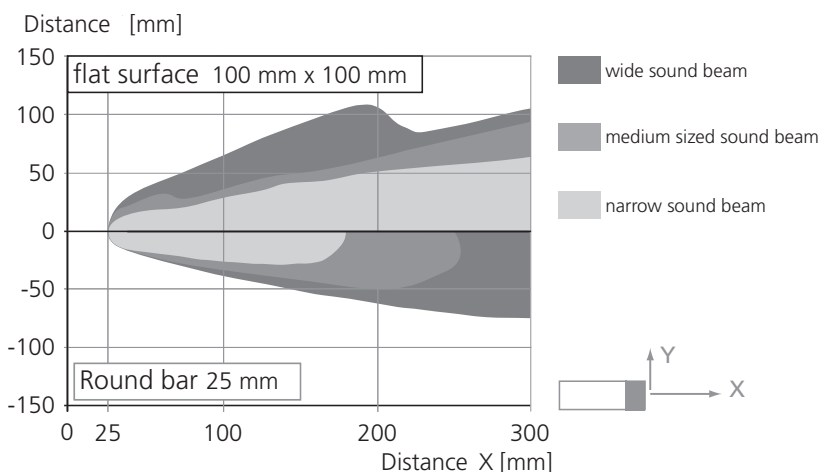

Analog output / switching signal

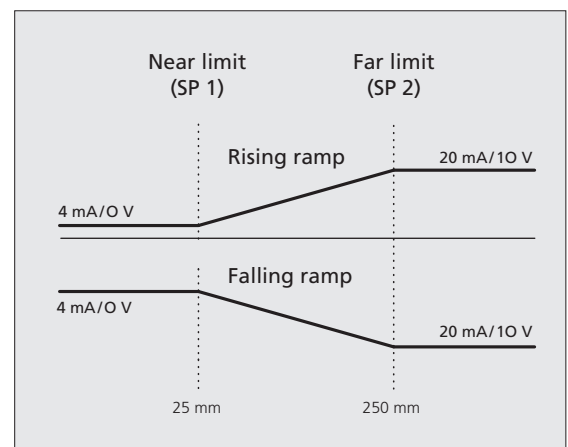

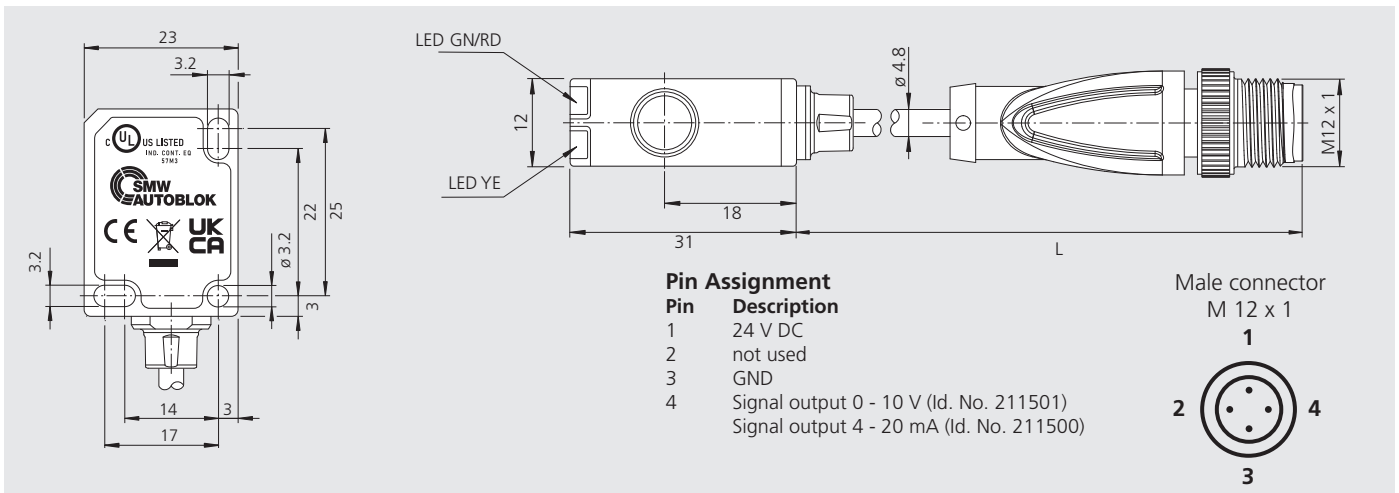

| SMW-AUTOBLOK Type | USP 4.0 25 - 250 0 - 10 V | USP 4.0 25 - 250 4 - 20 mA |
|--------------------------|---|--|
| Id. No. | 211501 | 211500 |
| Sensing range | | 25 - 250 mm |
| Adjustment range | | 25 - 250 mm |
| Output signal | 0 - 10 V | 4 - 20 mA |
| Power supply | | 18 ... 30 V DC |
| Repeat accuracy | | < ± 0.1% |
| Linearity | | < ± 1.0 % |
| Operating range | | -25 - 60° |
| Protection class | | IP 67 |
| Material | | PC |
| Weight | | 21 g |
| Blind zone | | 0 ... 20 mm |
| Standard target plate | | 10 mm x 10 mm |
| Response delay | | min. 8 ms (Factory setting: 29ms) |
| Sensor cycle time | | ≥ 8 ms (Factory setting), parameterizable to 60 s |
| Memory | | |
| Non-volatile memory | | EEPROM |
| Write cycles | | 300000 |
| Displays/controls | | |
| LED green | permanently on flashing | Power on Standby-Operation / IO-Link Kommunikation |
| LED yellow | permanently on flashing | Object in the evaluation area Programming the limits, object detected |
| LED red | permanently on flashing | Malfunction Programming the limits, object not recognized |
| Electrical data | | |
| No-load current | I_0 | ≤ 50 mA |
| Power input | P_0 | ≤ 500 mW |
| Standby delay | t_v | ≤ 300 ms |
| Cable | | |
| length | L | 200 mm |
| Mounting position | | any |
| Tightening torque | mounting screws | max. 0.2 Nm |
| Factory setting | | |
| Output | close border distant border output mode | 25 mm 250 mm rising ramp |
| Beam width | | wide |
| Pin assignment | | |
| Pin 1 | brown BN | 24 V DC |
| Pin 2 | white WH | - |
| Pin 3 | blue BU | GND |
| Pin 4 | black BK | 0 - 10 V |
| | | 4 - 20 mA |

Multi Device CLAMPING FORCE MEASURING DEVICE + ASSISTANCE SYSTEM GFT-X 4.0

Wireless gripping force and speed measuring of jaw chucks and collet chucks in dynamic or static measuring mode.



Measuring heads

M3/M4

Measuring heads for jaw chucks

Clamping-Ø 72 to 108 mm



Measuring head convertible for 2 and 3 jaws

| Measuring head | Range/gripping force | |
|----------------|----------------------|-------------|
| | 2 Jaws | 3 Jaws |
| M3 | 0 to 180 kN | 0 to 270 kN |
| | Id. No. 207074 | |
| M4 | 0 to 30 kN | 0 to 45 kN |
| | Id. No. 207259 | |



Separate measuring head for 2, 3 and 6 jaws

| Measuring head | Range/gripping force |
|----------------|------------------------|
| | 6 Jaws |
| M3-6 | 0 to 270 kN on request |
| M4-6 | 0 to 45 kN on request |

M2

Measuring head for collet chucks

Clamping-Ø 42 mm



For collets with 3 segments

| Measuring head | Range/gripping force |
|----------------|----------------------|
| | Collets |
| M2 | 0 to 120 kN |
| | Id. No. 207258 |

M1

Measuring head for collet chucks

Clamping-Ø 18 mm



For collets with 3 segments

| Measuring head | Range/gripping force |
|----------------|----------------------|
| | Collets |
| M1 | 0 to 75 kN |
| | Id. No. 207257 |

Features GFT-X 4.0

- **Wireless data transfer** from measuring head to table via Bluetooth for the measuring of dynamic and static clamping forces and speed (with included bracket)
- **Built-in camera** in tablet
- **Assistance systems:**
Manuals, Jaw Finder, Chuck Finder, Technical calculations
- **Rechargeable battery**, operation time in use: 8 h
- **Smart user interface**
- Tablet suitable for **industrial use** (Protection class IP 67)
- **Display** kN or lbf
- **Languages:**
German, English, Spanish
- **Measured clamping forces can be evaluated** by the integrated software or by the display software on Laptop / PC
- **4 Measuring heads** for jaw chucks and
2 Measuring heads for collet chucks



Gripping force tester – GFT-X 4.0 with measuring head



Standard equipment with GFT-X 4.0

Case with:

- Large Multi Device Tablet.
- Measuring head M3 (2 and 3 jaws) for jaw chucks with extensions and loading device.
- Torx-key T15 and spare screws.
- Bracket with magnet for measuring of speed.
- Loading cable with USB port.
- USB cable for Tablet.
- Adapter for USA, UK and Southern Europe.



Ordering data

GFT-X 4.0 case incl. Tablet, Measuring head M3 (2 and 3 jaws) Id. No. 206844

Option:

Measuring head M1 (for collet chucks) Id. No. 207257
 Measuring head M2 (for collet chucks) Id. No. 207258
 Measuring head M3 (2 and 3 jaws) Id. No. 207074
 Measuring head M4 (2 and 3 jaws, high-precision) Id. No. 207259
 Measuring head M3 (6 jaws) Id. No. 207586
 Measuring head M4 (6 jaws, high-precision) Id. No. 207587

Display software PC / Laptop


- The data transfer is via an USB interface.
- The software can be run under all standard windows systems.

Input

- Automatic measuring of the data (gripping force - speed).
- The number of measuring steps can be programmed free.

Output

- Table gripping force / speed.
- Diagram gripping force / speed.

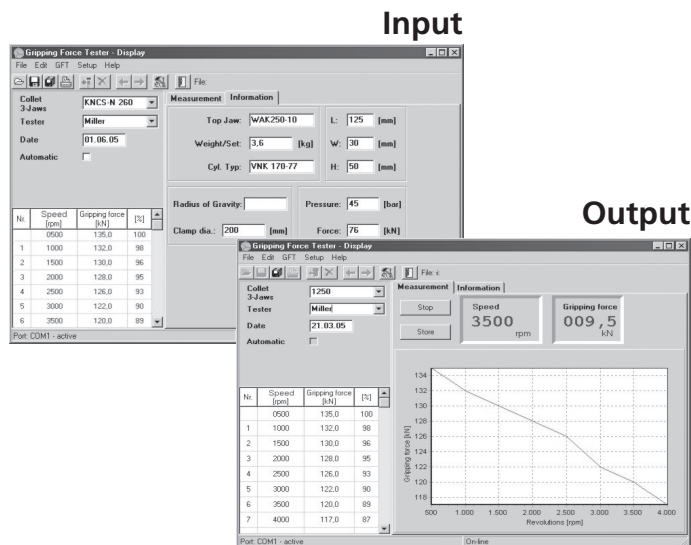

Technical data

| Tablet | |
|----------------------------------|-----------------------------|
| Display / Grip force F – speed | Display in kN / lbf - r.p.m |
| Data transfer | Bluetooth 4.0 |
| Power supply / Transformer | 100 / 240 V AC, 50 to 60 Hz |
| Distance Tablet / Measuring head | 1-4 m (appr.) |
| Interface PC / Laptop | USB 2.0 |
| Operating temp. | 0 to 40° (32°-100 °F) |
| Protection class | IP 67 |

Warning: Machine door must be closed while measuring head is rotating!

| | Measuring head M1 | Measuring head M2 | Measuring head M3 | Measuring head M4 |
|-------------------------------|---------------------------------|--------------------|--|--|
| Application | collet Ø 18 | collet Ø 42 | chuck 2 / 3 or 2 / 3 / 6 jaws | |
| Clamping diameter | 18 mm | 42 mm | 72 to 108 mm | 72 to 108 mm |
| No. of jaws | collet 3 x slotted | collet 3 x slotted | 2 and 3 jaws / 6 jaws | |
| Power supply | internal rechargeable capacitor | | | |
| Capacity of power supply | ca. 1.5 h at 50 % d.c. | | | |
| Data transfer | Bluetooth 4.0 | | | |
| Range / gripping force F max. | 0 to 75 kN | 0 to 120 kN | 0 to 180 kN (2-jaws) 0 to 270 kN (3 / 6-jaws) | 0 to 30 kN (2-jaws) 0 to 45 kN (3 / 6-jaws) |
| Speed r.p.m | <10.000 r.p.m. | <8.000 r.p.m. | <6.000 r.p.m. | <6.000 r.p.m. |
| Accuracy (F / r.p.m) | <5% / <1% fsr | <5% / <1% fsr | <3% / <1% fsr | <1.5% / <1% fsr |



Digital products


Customized software programming



Efficient development process:

- 1 - Requirements analysis
- 2 - Design
- 3 - Implementation
- 4 - Test cycle
- 5 - Release
- 6 - Customer test

Software solutions

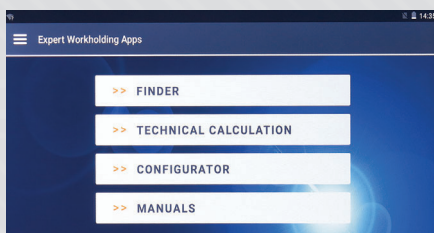

App programming

Solutions for PC / Laptop and Tablets / Smartphones




Cloud solutions

Cloud-based individual solutions



OPC UA

Secure data exchange using the latest technology standards

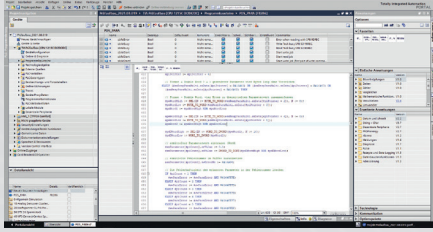


SPS programming

Control technology solutions for the digitalised production process



Monitoring / analysis software

Software for monitoring and evaluation of processes

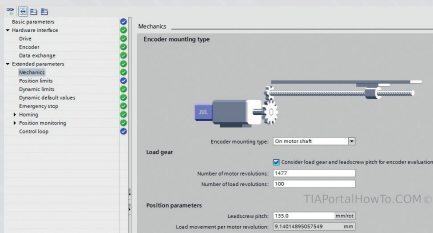

Motion Control

Software for motion control in the range of mechatronics / automation / robotics


Software mechatronic clamping systems

- S7 TIA
- Codesys
- IEC 61131



IO-Link Hub 16DIO

Input / output module for up to 16 signals (IN/OUT)




Application/customer benefits

- Module for 16 digital input and output signals
- 8 x M12 plug connections
- Solid metal housing
- Plug & Play

Technical features

- IO-Link Hub
- 8 x M12 A-coded I/O connection
- 16 digital signals (IN/OUT)
- Reverse polarity protection, short circuit proof
- M12, 5-poles, L-coded power connection
- Protection class: IP69K

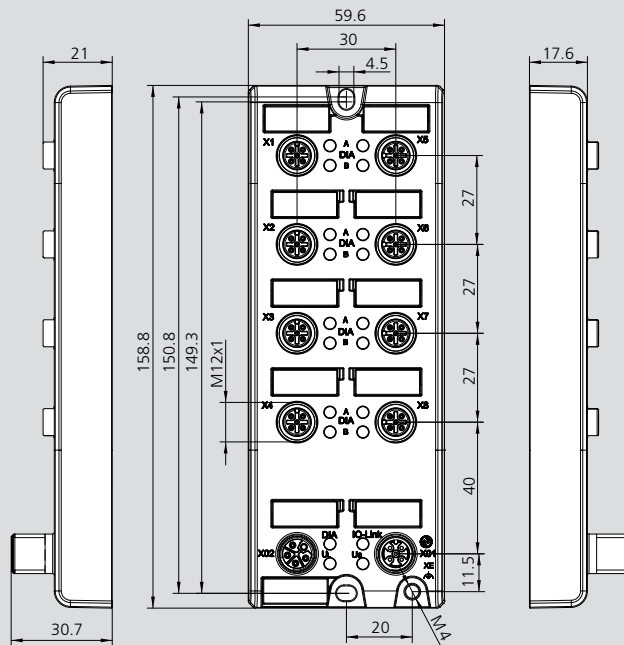


Subject to technical changes.
For more detailed information please ask our customer service.

| SMW-electronics Type | IO-Link Hub 16DIO |
|---------------------------------|------------------------|
| Id. No. | OE011403 |
| Housing material | Metal, zinc die-cast |
| Protection degree / IP rating | IP69K |
| Dimensions (WxHxD) | 60 mm x 31 mm x 159 mm |
| Weight | 400 g |
| Ambient temperature (operation) | -20 °C to 70 °C |
| Contact base material | gold-plated |

| | |
|-----------------------------------|---|
| SMW-electronics Type | IO-Link Hub 16DIO |
| Id. No. | 0E011403 |
| IO-Link | |
| Connection | M12, 5-poles, A-coded |
| Specification | V1.1.2 |
| Transmission rate / COM mode | COM 3 (230.4 kbps) |
| Power supply | |
| Connection module supply voltage | M12, 5-poles, A-coded |
| Supply voltage | 18...30 V |
| Reverse polarity protection | Yes |
| Status indicator | LED green |
| Diagnostic indicator | LED red |
| Connection sensor supply voltage | M12 power, 5-poles, L-coded |
| Number of connections | 1 |
| Sensor supply voltage | 18...30 V |
| Digital input channels | |
| Number of digital input channels | 16 |
| Connection | M12, 5-poles, A-coded |
| Number of ports | 8x, X1 to X8 |
| Input wiring | 2-, 3-, 4-wire |
| Nominal voltage | 24 V DC via US (module power supply) |
| Digital output channels | |
| Number of digital output channels | 16 |
| Connection | M12, 5-poles, A-coded |
| Number of ports | 8x, X1 to X8 |
| Output wiring | 2-, 3-wire |
| Nominal voltage | 24 V DC (supplied PIN 2 / 4 of M12 power connector) |

IO-Link Hub 16DI

Input module for up to 16 signals (IN)




Application/customer benefits

- Input module for up to 16 digital input signals
- 8 x M12 plug connections
- Solid metal housing
- Plug & Play

Technical features


- IO-Link Hub
- 8 x M12 A-coded I/O connection
- 16 digital signals (IN)
- Reverse polarity protection, short circuit proof
- M12, 5-poles, L-coded power connection
- Protection class: IP69K

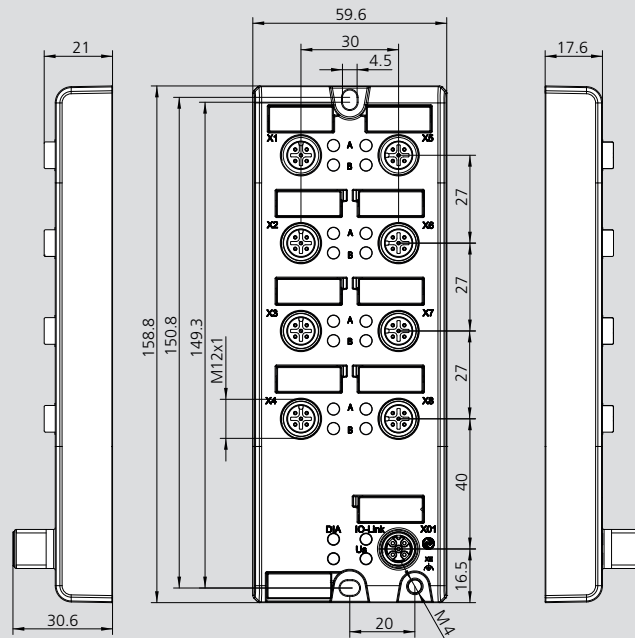

Subject to technical changes.
For more detailed information please ask our customer service.

| SMW-electronics Type | IO-Link Hub 16DI |
|---------------------------------|------------------------|
| Id. No. | OE011404 |
| Housing material | Metal, zinc die-cast |
| Protection degree / IP rating | IP69K |
| Dimensions (WxHxD) | 60 mm x 31 mm x 159 mm |
| Weight | 390 g |
| Ambient temperature (operation) | -20 °C to 70 °C |
| Contact base material | gold-plated |


Application example with an inductive coupling system

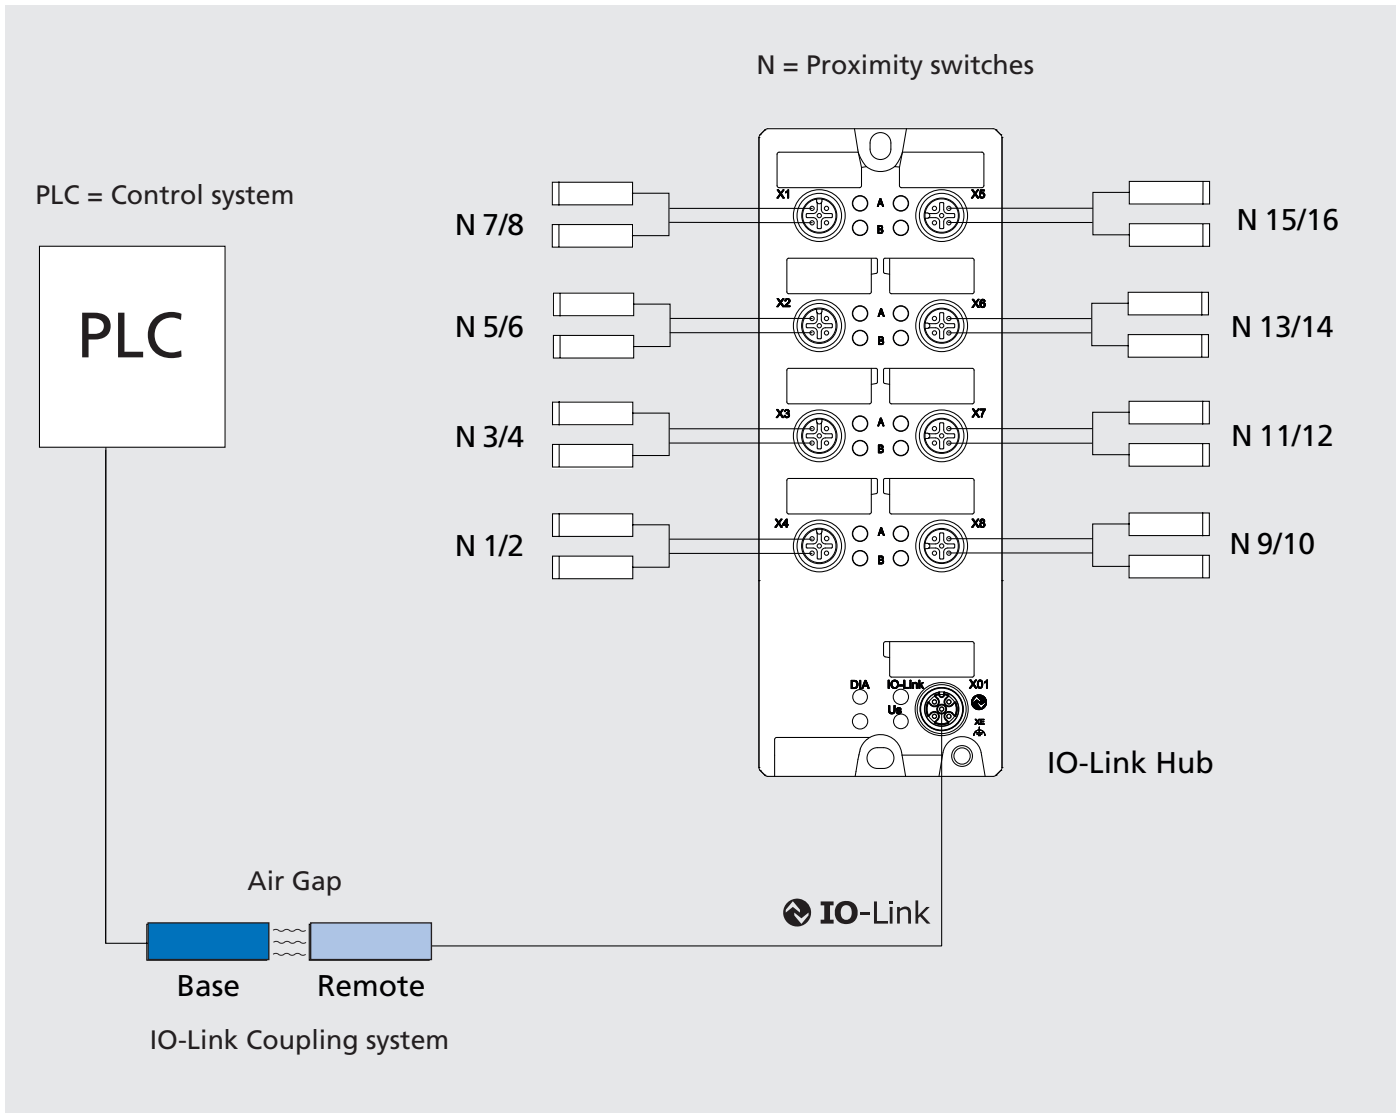

| SMW-electronics Type | IO-Link Hub 16DI |
|----------------------------------|------------------------------|
| Id. No. | 0E011404 |
| IO-Link | |
| Connection Specification | M12, 5-poles, A-coded |
| Transmission rate / COM mode | V1.1.2 COM 3 (230.4 kbps) |
| Power supply | |
| Connection module supply voltage | M12, 5-poles, A-coded |
| Power supply | 18...30 V |
| Reverse polarity protection | Yes |
| Status indicator | LED green |
| Diagnostic indicator | LED red |
| Connection sensor supply voltage | M12 power, 5-poles, L-coded |
| Sensor supply voltage | 18...30 V |
| Digital input channels | |
| Number of digital input channels | 16 |
| Connection | M12, 5-poles, A-coded |
| Number of ports | 8x, X1 to X8 |
| Input wiring | 2, 3-wire |
| Nominal voltage | 24 V (module power supply) |
| Sensor type | PNP |


- Sensor-/ actuator connection cable
- Power cable

Sensor actuator cable - 1 meter

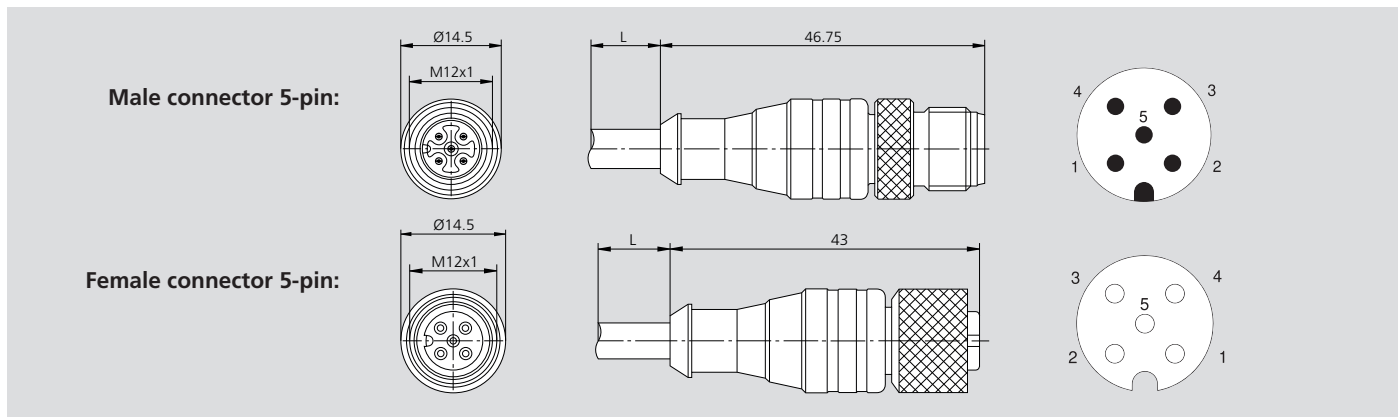

| SMW-electronics Type | Connection cable M12 pin straight to M12 socket straight | |
|----------------------|--|----------|
| Id. No. | 0E011405 | 0E011406 |
| Number of poles | Side 1 = 5, side 2 = 5 | |
| Coding | A | |
| Material contact | CuSn, gold-plated | |
| Cable sheath | PUR black | |
| Cable construction | 5 x 0.5 mm ² | |
| UL approval | UL 2238; cURus | |
| IP protection class | IP 65, IP 67, IP 68, IP 69K | |
| Length | 1 m | 3 m |

Power cable for IO-Link hub

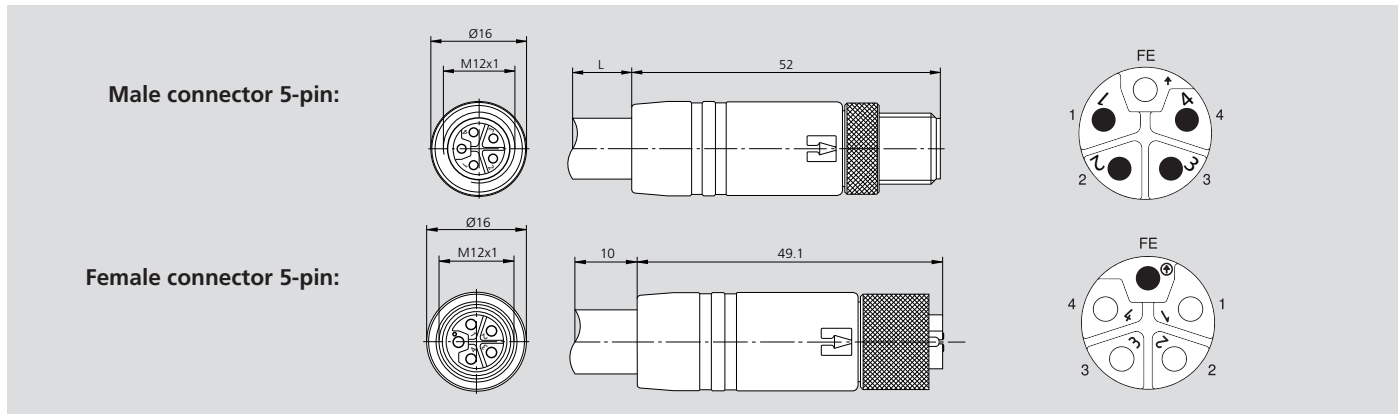

| SMW-electronics Type | M12 power connection cable: socket, straight |
|----------------------|--|
| Id. No. | 0E011407 |
| Number of poles | 5 (4+FE) |
| Coding | L |
| Material contact | CuNi, gold-plated |
| Cable sheath | PUR grey |
| Cable construction | 5 x 1.5 mm ² |
| UL approval | UL 2237; cULus |
| IP protection class | IP65, IP67, IP68, IP69K |
| Length | 5 m |
| Shielding | unshielded |
| Operating voltage | 63 V |
| Rated current | 16 A |

Notes






Application/customer benefits

- RFID read/write stations with IO-Link interface
- Frequency range 13.56 MHz according to standard ISO15693
- The unit supports transponders according to standard ISO 15693
- Plug and Play - Easy integration
- Proven and flexible recognition system
- LEDs for function display
- Particularly flat design
- Mountable on metal

Technical features

- Protection class IP67
- Connection Plug connector M12 x 1
- IO-Link interface V1.1 (COM 3)
- Read / write distance 0 - 55 mm
- Dimensions 80 x 28 mm
- Operating frequency 13.56 Mhz

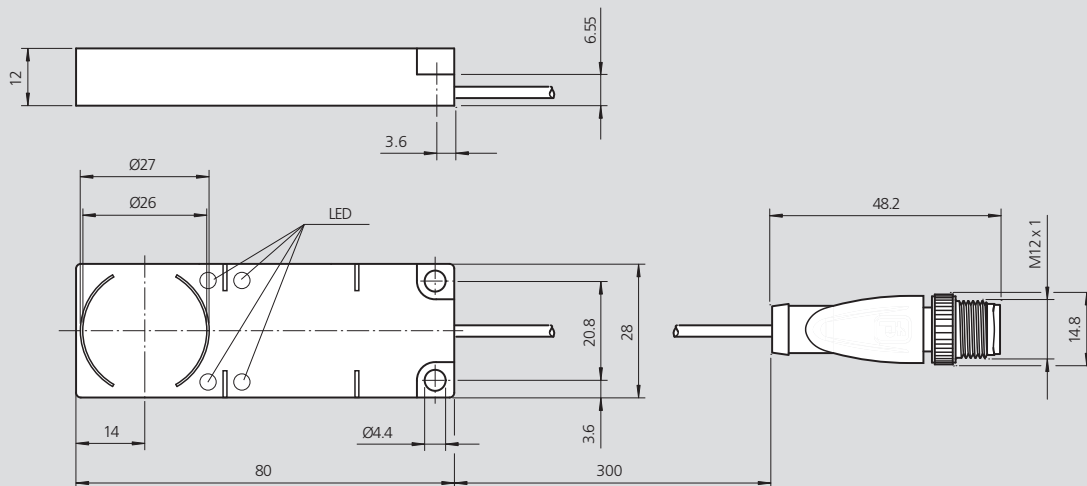

Subject to technical changes.
For more detailed information please ask our customer service.

| SMW-electronics Type | RFID read / write station |
|--|--|
| Id. No. | 0E011400 |
| General data | |
| Operating frequency | 13.56 MHz |
| Transmission rate | 26 kBit/s |
| Read distance | 0 ... 55 mm |
| Write distance | 0 ... 55 mm |
| Functional safety characteristics | |
| MTTF _d | 280 a |
| Diagnostic coverage (DC) | 0 % |
| Displays / controls | |
| LED green | ON: Power ON / flashing: IO-Link communication |
| LED yellow | Data carrier detected |
| LED red | Flashing: IO-Link communication disturbed |
| LED blue | Write / read attempt is being carried out |
| Interface | |
| Interface type | IO-Link |
| Mode | COM 3 |
| Environmental conditions | |
| Ambient temperature | -25 ... 70°C (-13 ... 158°F) |
| Mechanical data | |
| Protection class | IP 67 |
| Connection | Connector M12 x 1 |




Application/customer benefits

- 2000 bytes of memory freely available
- Readable and writable from both sides
- Simple mounting due to fixing hole
- Can be rewritten as often as required

Technical features

- Protection class IP 68
- Operating frequency 13.56 Mhz
- 64 bit fixed code

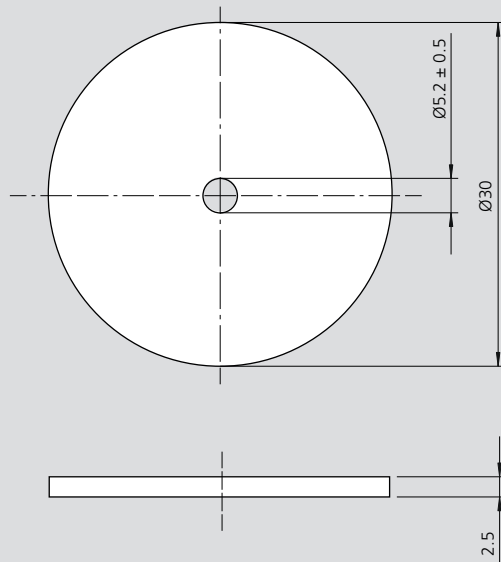


Subject to technical changes.
For more detailed information please ask our customer service.

| | |
|---------------------------------|-------------------------|
| SMW-electronics Type | RFID Transponder |
| Id. No. | 0E011401 |
| General data | |
| Operating frequency | 13.56 MHz |
| Transmission rate | 26 kBit/s |
| Memory | |
| Chip type | FRAM MB89R118 (Fujitsu) |
| FRAM | 16 kBit |
| UID | 64 Bit |
| Memory organisation | 8 Byte / Block |
| Read cycles | unlimited |
| Write cycles | unlimited |
| Data retention time | 10 years |
| Environmental conditions | |
| Ambient temperature | -40 ... 90 °C |
| Mechanical data | |
| Protection class | IP 68 |

Note: Other versions available on request.

Application examples

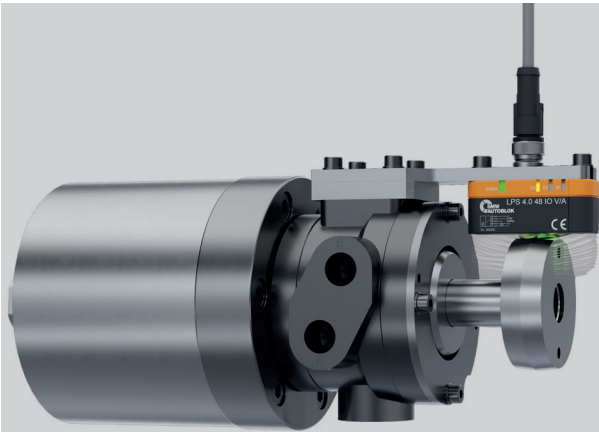


Application: Cylinder stroke sensing with linear position sensor LPS 4.0

- Inductive position monitoring
- Highest accuracy
- Signal output IO-Link, analog signal
- Various measuring lengths: 14, 48, 80 and 120 mm

Application: Status query transport system with inductive coupler M30

- Inductive transmission of energy and signals
- Very fast connection set-up between base and remote system
- Dynamic pairing: 1 base system connects to several remote units
- Suitable for clean room applications
- Different signals possible (IO-Link, digital signals, analog signals)

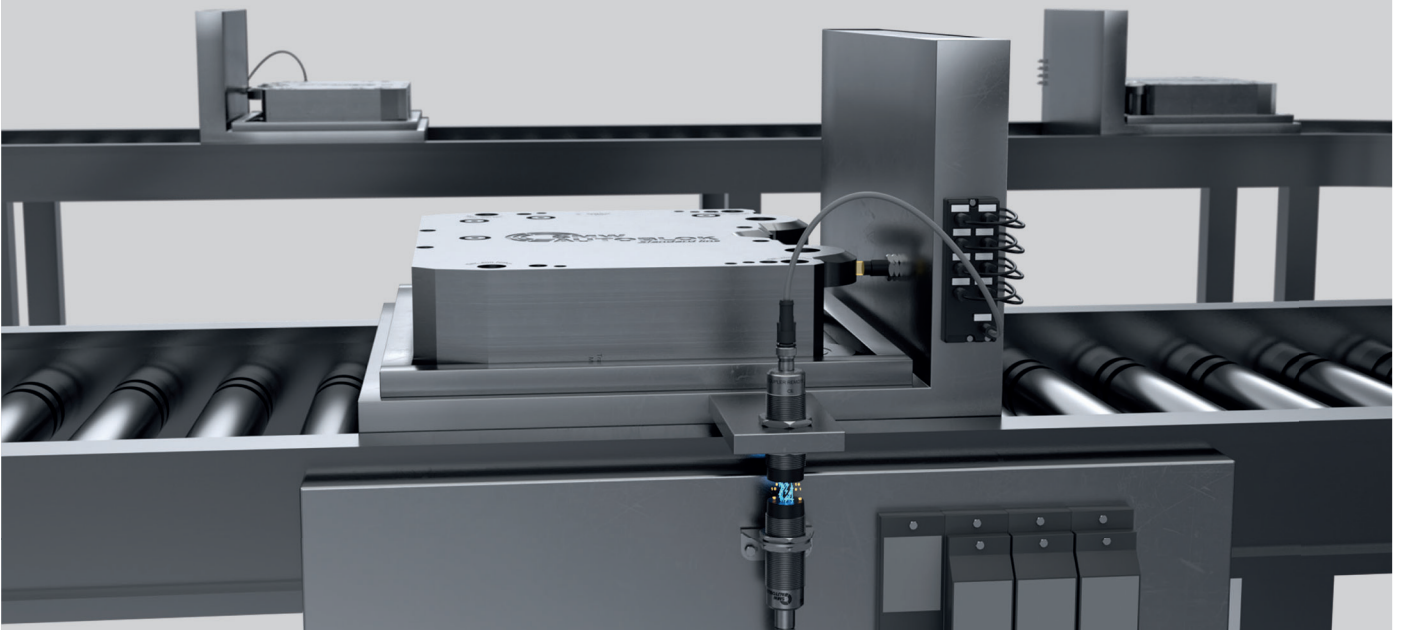


Application: Robotics End of Arm Tooling

- Inductive transmission of energy and signals
- Contact free Ethernet transmission for ultra-fast data transmission for camera application
- Power supply for camera and electro-mechanical gripper, also contact free
- Suitable for clean room applications
- Endless rotating gripper motion possible
- Sensitive gripping of components
- Variable adjustment of the gripping force



Application examples

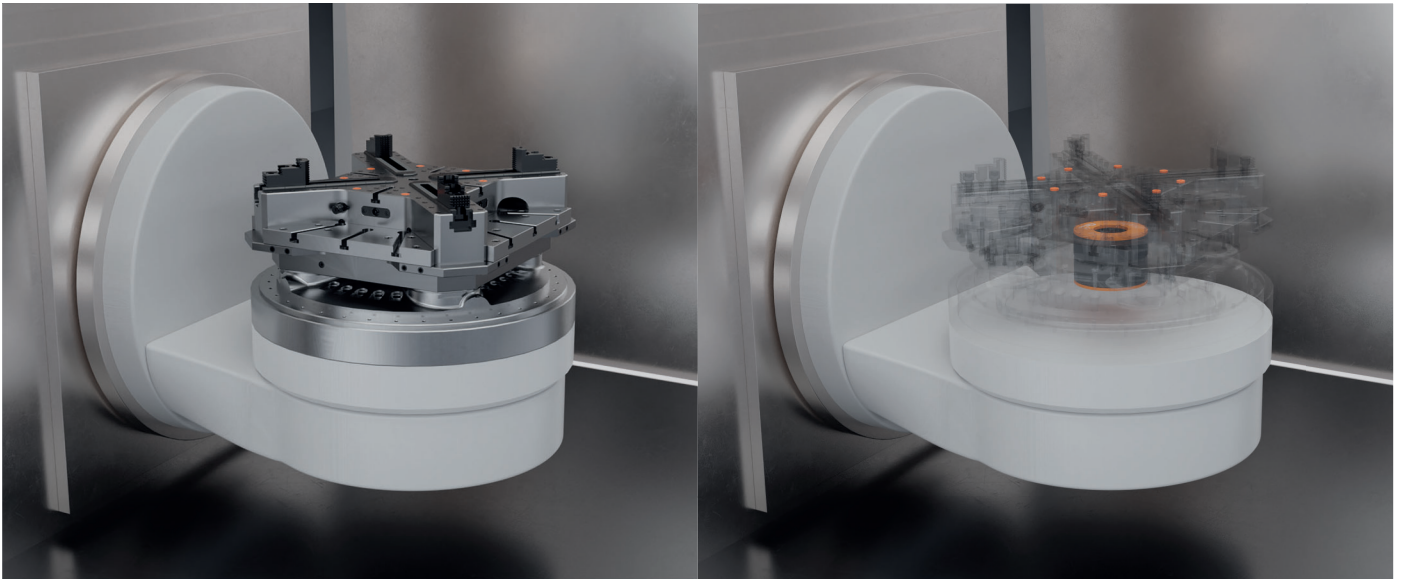

Application: Machine tool

- Inductive transmission of energy and signal between machine table and pallet
- Digitized clamping devices: Monitoring of different process parameters even during machining by using integrated sensor technology
- Ethernet or IO-Link

Application: Off Highway

- Inductive transmission of energy and signal
- Plug replacement for safe communication between excavator and attachment tool
- Wear-resistant (even with a high degree of contamination) and maintenance-free
- Quick and manless tool change




Application examples

Application: Clamping position monitoring for steady rests with USP 4.0

Cable connection

Ultrasonic sensor
USP 4.0

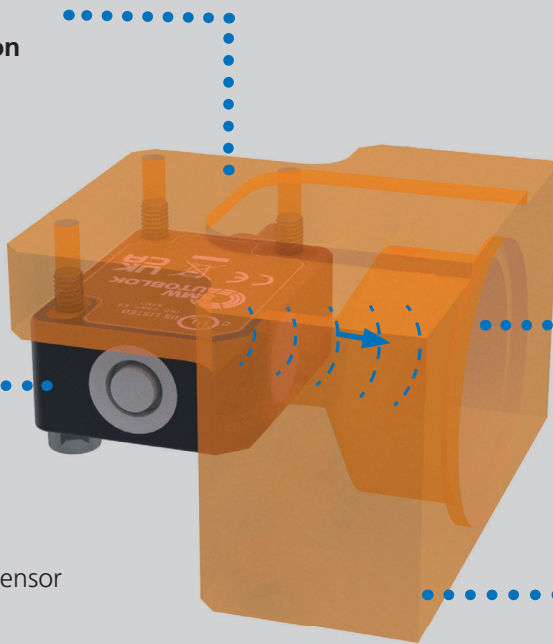


Opening
for ultrasonic waves

Mounting Unit
for steady rests

Mounting Unit
for steady rests


Ultrasonic sensor
USP 4.0

Ultrasonic waves
(absorbed by a special area in the middle piece)

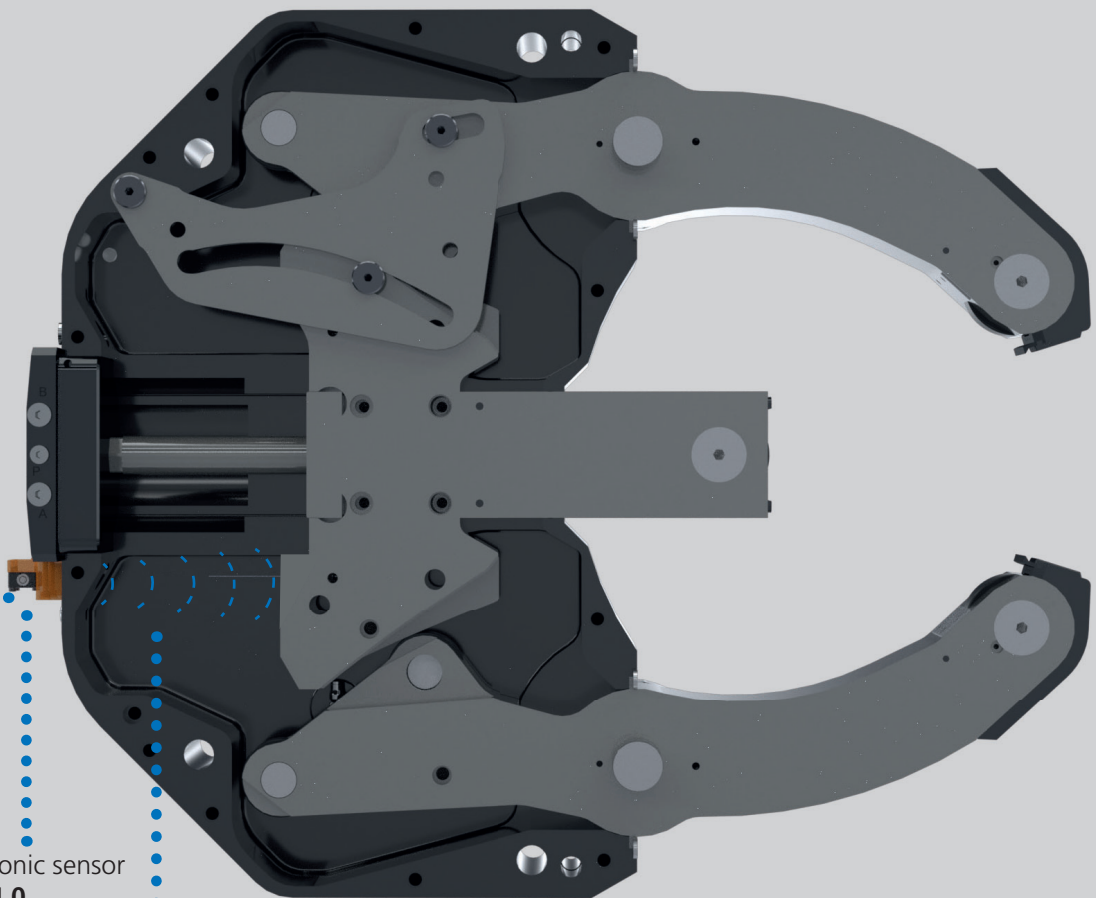

Application examples


Application: Inductive coupling system for intelligent tool holder

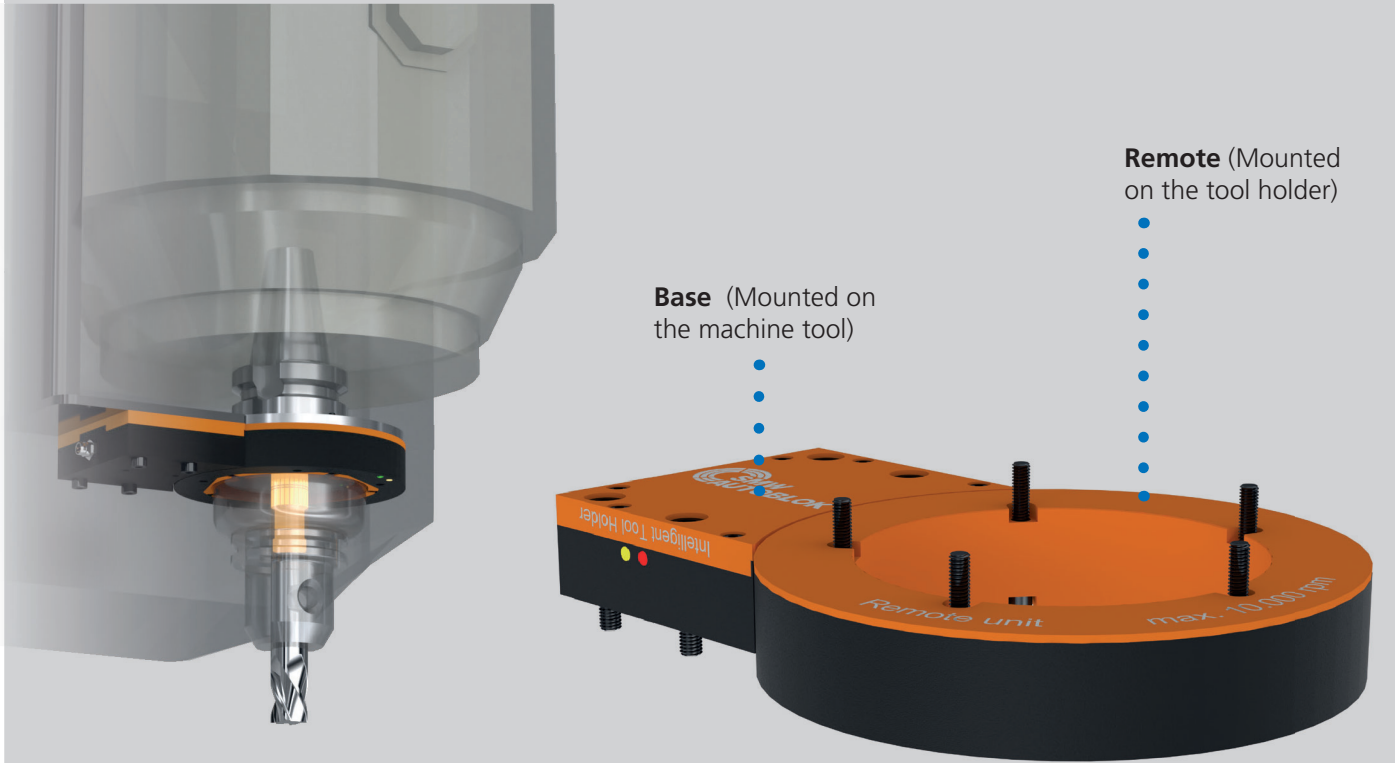

- Signal transmission for force (with integrated DMS technology) from an intelligent tool holder to the machine tool
- Contact free energy transmission for sensor supply

Force sensor in tool holder

- Contact free energy and signal transmission between Base and Remote unit via air gap.

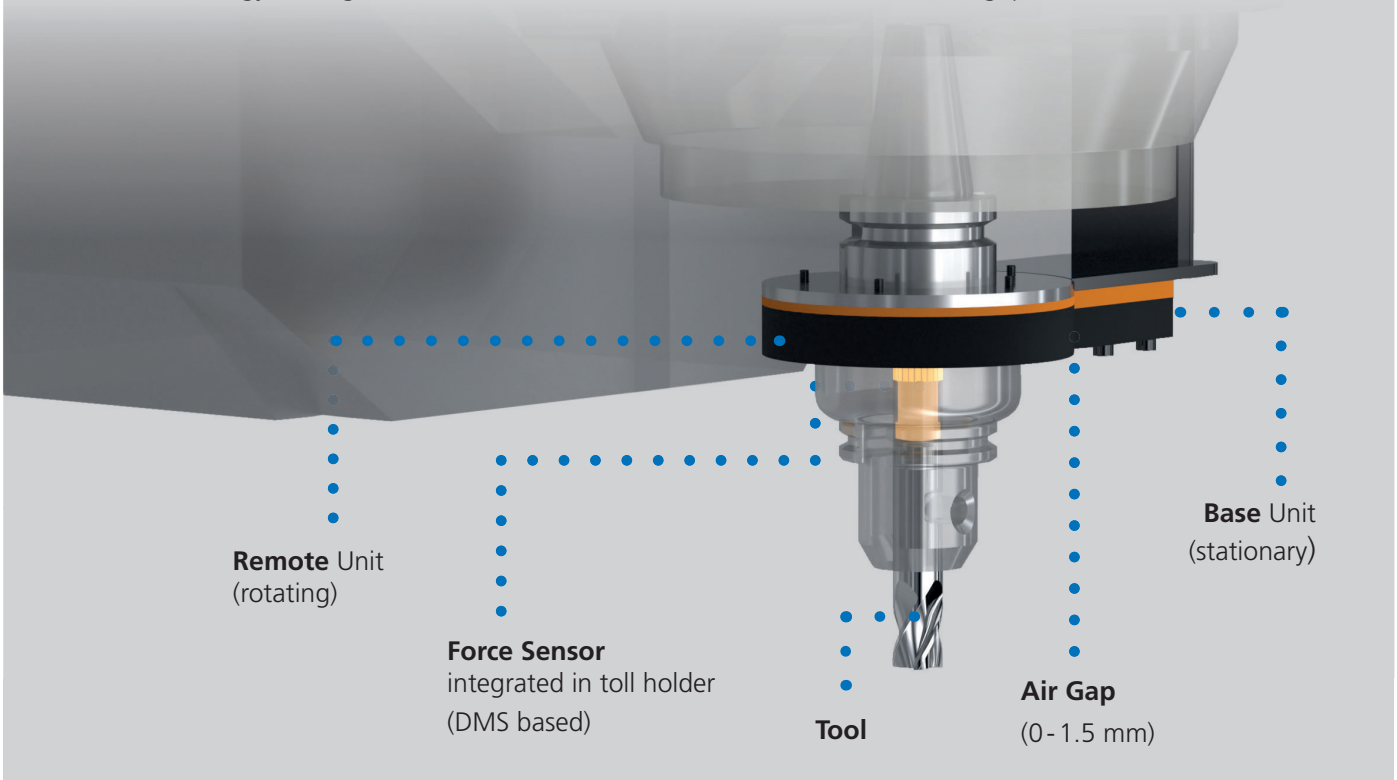



ZIBTRPRO
tehnologija obdelave · vpenjalni sistemi