





SMW-AUTOBLOK worldwide

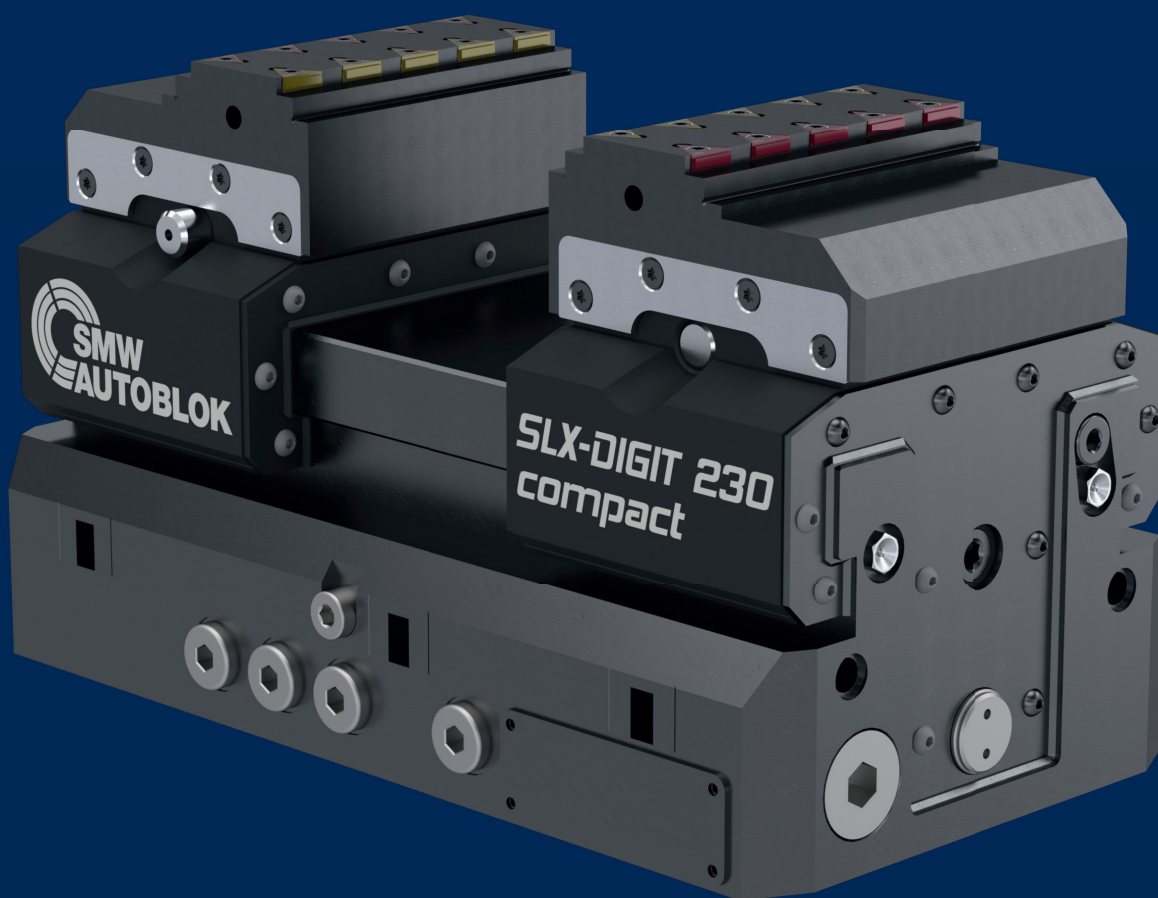

SMW-AUTOBLOK manufacturing plant Meckenbeuren
Development | Manufacturing | Sales | Service | Support

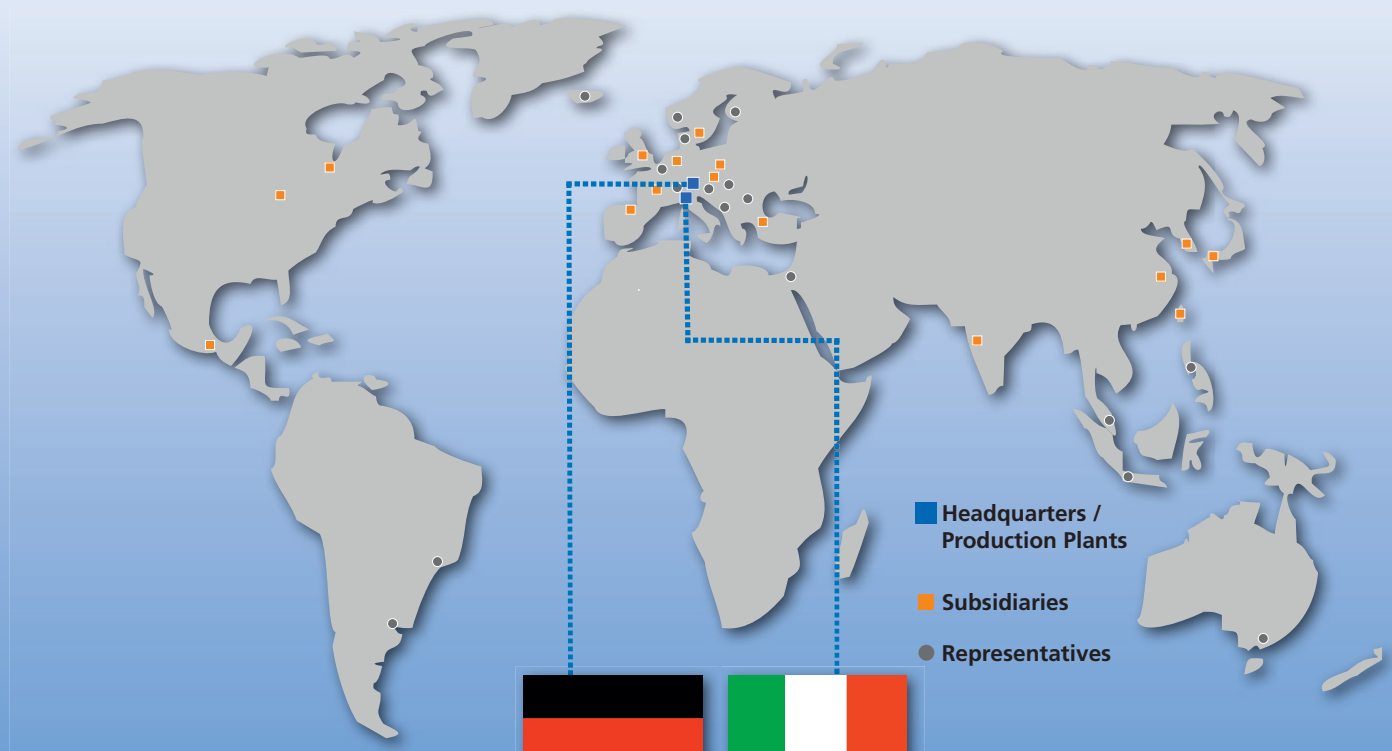

AUTOBLOK manufacturing plant Caprie-Torino



SMW-electronics manufacturing plant Meckenbeuren
Development | Manufacturing | Sales | Service | Support



SMW Factory Airport Meckenbeuren
Production | Automation | Electronics | Clamping systems


Visit our website: www.smw-autoblok.com

www.smw-electronics.com

Market sectors



Automotive

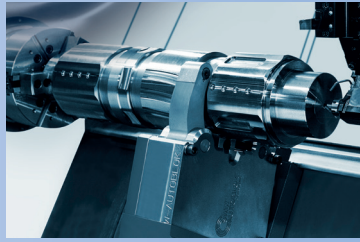

Industrial Equipment




OCTG




Aerospace



Off Highway

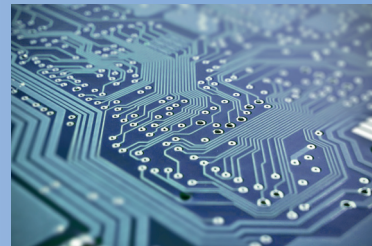

Electronics

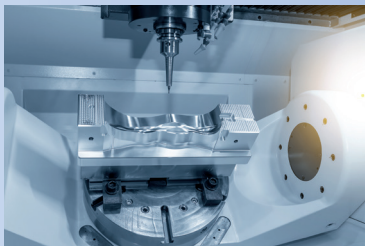

Mold Industry



Plastics



**Automation
and Handling**



**Mining Industry
Cranes**



Robots / Cobots




Medical Technology



Intralogistics



Packaging Industry

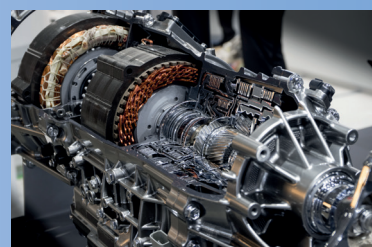

Powertrain

Product range



proofline® series
fully sealed - low maintenance

Page 10

ZeroAct e-motion

Mechatronic zero point clamping system

- Mechatronic actuation
- Integrated safety systems
- e-sensing: Inductive workpiece detection
- Flat design (48 mm)
- **proofline®** = fully sealed - low maintenance



proofline® series
fully sealed - low maintenance

Page 34

Centco4 digit-HLW

Hydraulic chuck

- Digitized by integrated sensor technology
- Monitoring of different process parameters even during processing
- Non-contact power supply for sensors and signal output by means of inductive couplers
- **proofline®** = fully sealed - low maintenance



proofline® series
fully sealed - low maintenance

Page 14

SLX digit 230 compact

Hydraulic long-stroke vise

- Digitized by to integrated sensoric
- Automated quick jaw change
- Self-centering clamping
- **proofline®** = fully sealed - low maintenance



proofline® series
fully sealed - low maintenance

Page 38

MM e-motion

Mechatronic power chuck

- High precision single jaw actuation
- Precise clamping force setting
- High-Low clamping
- Automatic traversing and correction possible
- Contact free transmission of energy and data via inductive coupler
- **proofline®** = fully sealed - low maintenance



proofline® series
fully sealed - low maintenance

Page 18

SLX digit 335

Hydraulic long-stroke vise

- Digitized by to integrated sensoric
- Automated quick jaw change
- Self-centering clamping
- **proofline®** = fully sealed - low maintenance



proofline® series
fully sealed - low maintenance

Page 43

CC e-motion

Mechatronic power chuck

- High precision single jaw actuation
- Precise clamping force setting
- High-Low clamping
- Automatic traversing and correction possible
- Contact free transmission of energy and data via inductive coupler
- **proofline®** = fully sealed - low maintenance



AI READY

Page 22

SLX e-motion 335 compact

Mechatronic long-stroke vise

- Mechatronic clamping drive with maintenance of clamping force
- Pre-positioning and clamping force presetting
- Permanent monitoring of the clamping force and jaw position
- Protection class: IP67



Page 48

Inductive Coupling System F100 Ethernet

Axial coupler

- Contact free transmission of energy and signals
- High transmission of energy up to 75 W
- Transmission of signals: Ethernet 100 Base-T
- Diameter: 100 mm / through-hole: 50 mm



AI READY

Page 24

SLX e-motion 520

Mechatronic long-stroke vise

- Mechatronic clamping drive with maintenance of clamping force
- Pre-positioning and clamping force presetting
- Permanent monitoring of the clamping force and jaw position
- Protection class: IP67



Page 50

Inductive Coupling System F100-2IOL

Axial coupler

- Contact free transmission of energy and signals
- High transmission of energy up to 75 W
- Transmission of signals: 2x IO-Link (COM1, COM2, COM3)
- Diameter: 100 mm / through-hole: 50 mm



AI READY

Page 28

SL e-motion

Mechatronic twin vise

- Mechatronic clamping drive with maintenance of clamping force
- Pre-positioning and clamping force presetting
- Permanent monitoring of the clamping force
- Protection class: IP67



Page 54

Inductive Coupling System F180 Ethernet

Axial coupler

- Contact free transmission of energy and signals
- High transmission of energy up to 400 W
- Transmission of signals: Ethernet 100 Base-T
- Diameter: 180 mm / through-hole: 85 mm



proofline® series
fully sealed - low maintenance

Page 30

RT e-motion

Mechatronic tombstone

- Each workholding can be controlled individually
- Clamping stations can be individually equipped
- Contact free transmission of power and signals via inductive coupler
- **proofline®** = fully sealed - low maintenance



Page 58


Inductive Coupling System F280

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 1100 W
- Transmission of signals: 2 x CAN-Bus, 2 x digital
- Diameter: 280 mm

Continuation
on the next page

Product range



Inductive Coupling System F100/66-IOL

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 22 W
- Transmission of signals: IO-Link (COM1, COM2, COM3)
- Ideal for pallet change application

Page 60



Inductive Coupling System M12-2

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 1 W
- Transmission of signals: 2 x digital
- Mounting: M12 x 1

Page 62



Inductive Coupling System M18-4

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 1.2 W
- Transmission of signals: 4 x digital
- Mounting: M18 x 1

Page 64



Inductive Coupling System M30-IOL

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 12 W
- Transmission of signals: IO-Link (COM1, COM2, COM3)
- Mounting: M30 x 1.5

Page 66



Inductive Coupling System M30-4A

Axial coupler

- Contact free transmission of energy and signals
- Transmission of energy up to 6 W
- Transmission of signals: 4 x analog (4-20 mA / 0-10 V)
- Mounting: M30 x 1.5

Page 68



e-sensing

Digital workpiece stop

- Inductive workpiece detection / distance measurement
- High-precision, multidimensional position control
- Parameterizable sensor system
- For e-motion chucks (MM, CC) or as a retrofit solution

Page 70



HRU

Hybrid rotary union

- Contact free transmission of energy and signals
- For 1 medium (air, oil + air, cooling, lubricant)
- Energy transmission : 24 V / 2.5 W
- Signal transmission: 3x Analog 0-10 V / 3x Digital PNP

Page 72



LPS 4.0 IO

Linear position measuring systems

- Inductive measuring system
- Measuring range: 14, 48, 80 und 120 mm
- Output analog and IO-Link interface
- With Target

Page 74



Accessories

- IO-link Hub 16 DIO, 16 DI
- Connecting cables
- Mounting brackets: M12, M18, M30

Page 80




GFT-X 4.0

Multifunctional Gripping Force Tester

- Wireless grip force measuring
- Assistance systems APPs
- Tablet IP 67 protected
- Integrated software for clamping force / speed evaluation

Page 88



Application examples

- LPS 4.0 IO use of measuring systems
- Inductive couplers
- Digitized workholding

Page 92



Integration

Plug & Play


- Overview: integration e-motion products

Page 94

Continuation from previous page

OUR DIGITAL PACKAGE

Digitized workholding - Plug & Play

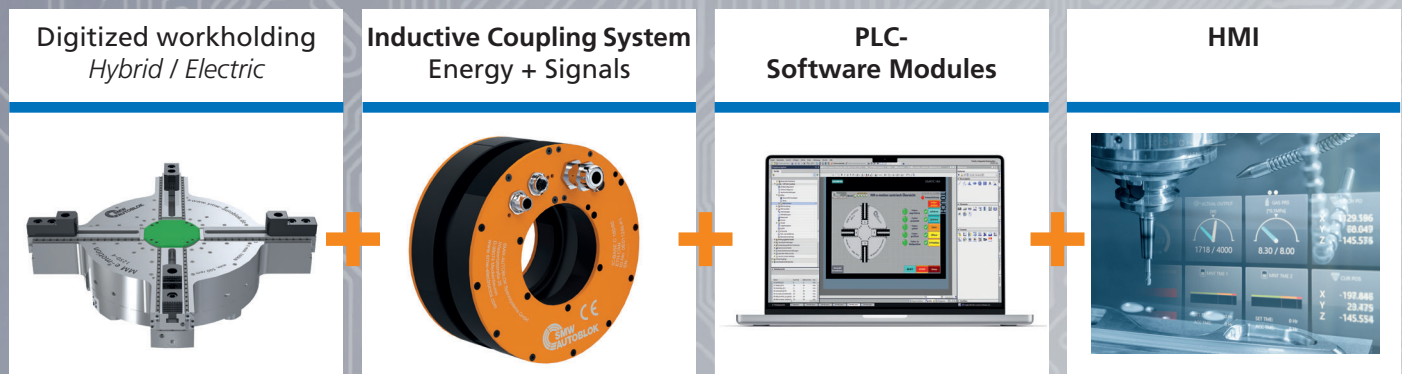

SMW-AUTOBLOK, the technology leader of digitized workholding, offers a complete product range.

Hybrid workholding are conventionally actuated workholding which are additionally equipped with sensoric. The integrated sensoric is supplied with power contact free by means of an inductive coupling system. It also transmits the signals from the sensors to the machine control system.

Mechatronic workholding have an electric actuation in addition to the sensor technology used. The energy required for the electric actuation is also provided contact free by the inductive coupling system.

Digitized workholding are quickly installed thanks to Plug & Play and existing PLC software modules and offer the user significant customer benefits as well as maximum safety.

Customer benefits

Digitized workholding

- Highest safety by integrated sensoric and complete safety concepts
- Can be automated (robot loading and unloading, automated set-up, pallet change)
- Universal clamping profiles due to single jaw actuation
- Precise clamping force adjustment and pre-positioning
- Plug & Play by integrated intelligence in the workholding and PLC software modules
- Compatibility with all common communication interfaces (e.g. Profinet, CAN, IO-Link)
- Sustainable and environmentally friendly due to the elimination of hydraulics - Energy efficient and CO₂ emission reducing.


OVERVIEW

Conventional / hybrid and electric workholding

	<u>Conventional</u>	<u>Hybrid</u>	<u>Electric</u>
WORKHOLDING ACTUATION	▪ manual ▪ pneumatic ▪ hydraulic	▪ manual ▪ pneumatic ▪ hydraulic	▪ mechatronic driven by means of actuators
DIGITALIZATION	no	<u>DIGITIZED by sensor technology:</u> ▪ Position monitoring of the jaws ▪ Pressure monitoring ▪ Clamping force measurement ▪ e-sensing: Inductive workpiece detection ▪ Stroke monitoring	<u>DIGITIZED by sensor technology:</u> ▪ Position monitoring of the jaws ▪ Pressure monitoring ▪ Clamping force measurement ▪ e-sensing: Inductive workpiece detection ▪ Stroke monitoring
MEDIA-INTERFACE	Rotary distributor	Rotary distributor + Inductive coupler for contact free power transmission for sensoric supply / signal transmission	Inductive coupler for contact free power transmission for sensoric and actuation / signal transmission
SAFETY	▪ Clamping pressure control ▪ Self-locking	▪ End position control ▪ Pressure monitoring ▪ Clamping position monitoring ▪ Mechanical self-locking	▪ End position control ▪ Clamping position monitoring ▪ Motor brake ▪ Clamping force monitoring ▪ Mechanical self-locking

low


high



LEVEL OF DIGITALIZATION

Mechatronic zero point clamping system

- Mechatronic actuation
- Safety sensors integrated
- e-sensing for inductive workpiece detection

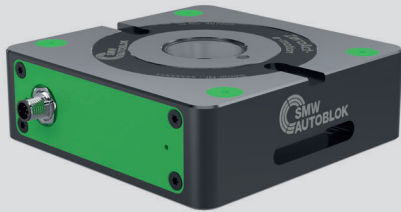

proofline® series
fully sealed – low maintenance

Application/customer benefits

- Mechatronic actuation
- Safety sensors integrated
- Can be automated
- e-sensing: Inductive workpiece detection
- 100% electric, ideal for measuring machines and clean room applications
- Large Z-travel due to flat design (48 mm)
- High flexibility as the clamping bolts are compatible with APS / WPS / ZeroAct
- Mechanical self-locking in the clamped position
- Orientation keyways

Technical features

- Pull-down force: 15 kN
- Repeatability < 5 µm
- Holding force: 35 / 50 / 75 kN (M10 / M12 / M16) depending on thread of clamping pin
- 2 holding slides for maximum hold while clamping
- Connection: M12 x 1, 8 - pole for power and signals
- **proofline®** = fully sealed - low maintenance


Standard equipment

ZeroAct e-motion

ZeroAct e-motion


CLAMPING PLATE

Clamping bolts (suitable to
APS / WPS / ZeroAct)



• e-sensing: inductive
workpiece detection

• Integrated
control unit

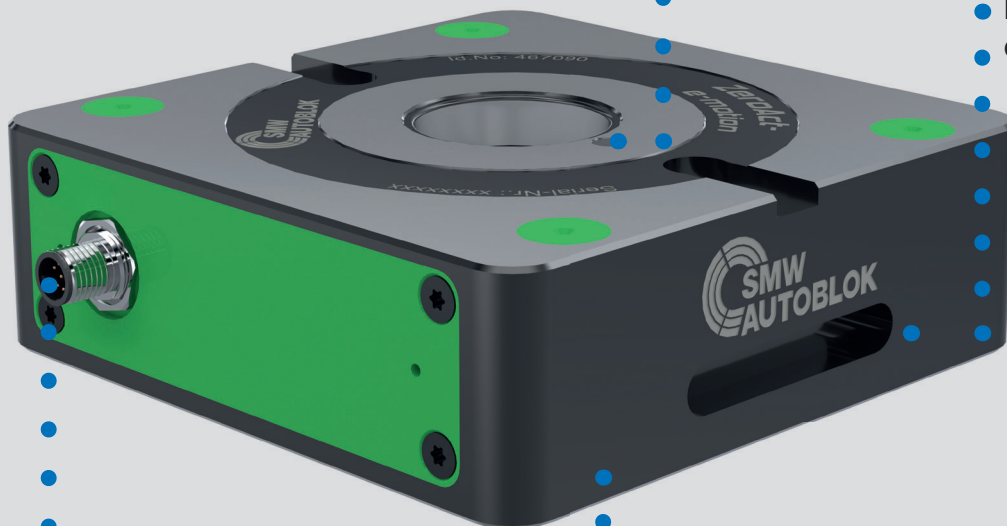






• Connection for
power + signals
from the side
or from bottom

• Sensoric for signals
„clamped“ or „unclamped“

Dimension and technical data


Mechatronic zero point clamping system

Option: Connection for power + signals from bottom

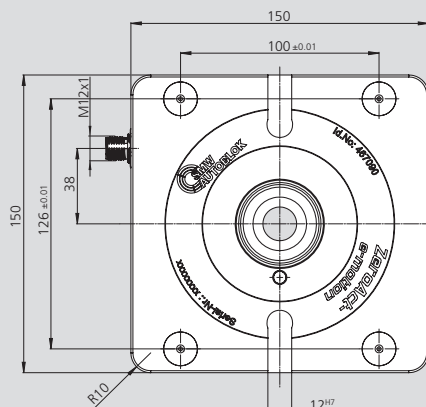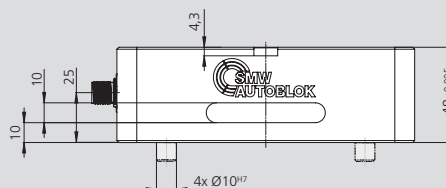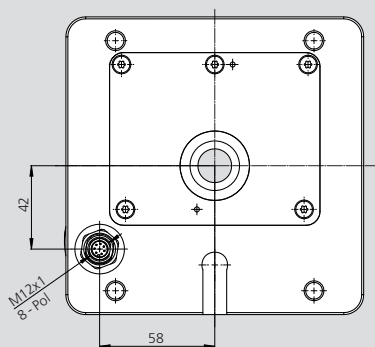

Subject to technical changes.
For more detailed information please ask our customer service.

Type		ZeroAct e-motion	
Id. No.		467090	
Pull-down force	kN	15	
Repeatability	mm	< 0.005	
Holding force clamping pin M10	kN	35	
Holding force clamping pin M12	kN	50	
Holding force clamping pin M16	kN	75	
Weight	kg	7	
Current consumption / voltage		2 A	
Pin 1		+ 24 VDC (2 A)	
Pin 2		GND	
Pin 3		n.c.	
Pin 4		Set to unclamp	
Pin 5		Set to clamp	
Pin 6		Status opened	
Pin 7		Status clamped	
Pin 8		Status e-sensing	

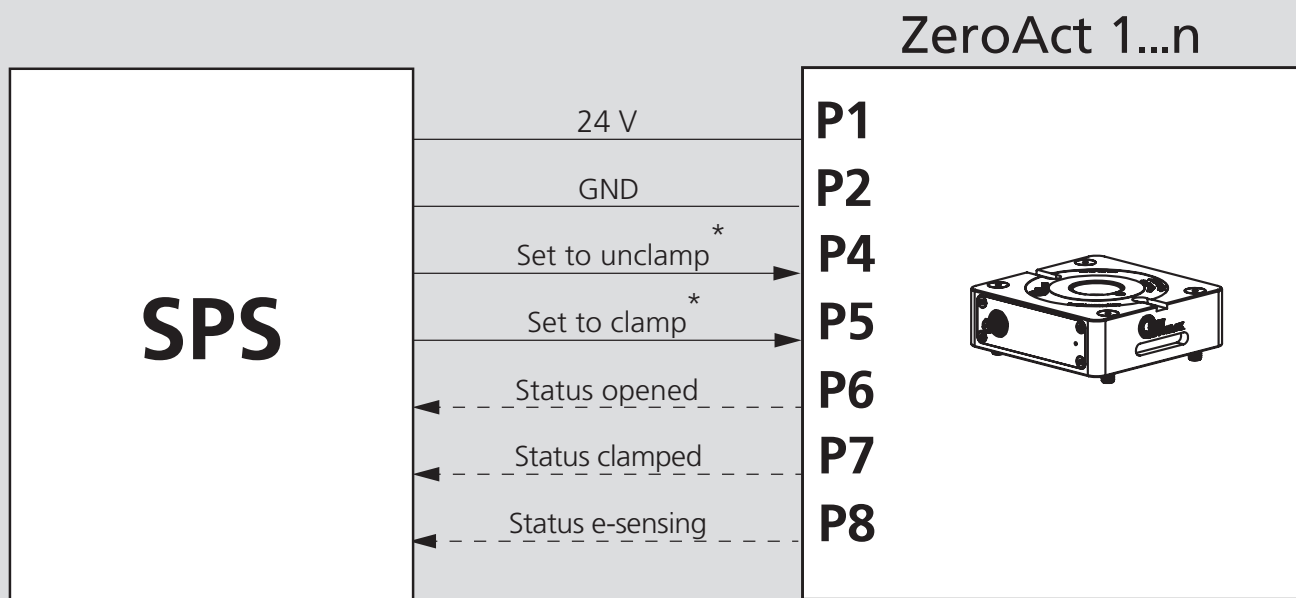


* Control unit 24 V

Overview signals

Pin	P6	P7	P8
ZeroAct opened	24 V	-	-
ZeroAct closed	-	24 V	-
ZeroAct in clamping movement / process	-	-	-
Not permitted	24 V	24 V	-
e-sensing (inductive workpiece detection)	-	-	24 V

Plug & Play

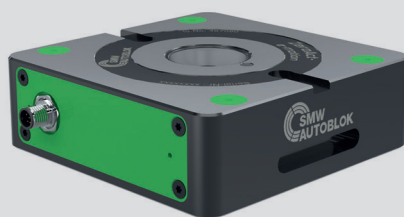

Zero Act e-motion



Integrated control

■ Clamping bolt 1-piece

Mechatronic zero point clamping system



Type A

Type B

Type C

Application/customer benefits

- Fixing and positioning on the ZeroAct e-motion clamping systems
- Wear resistant due to extra hard protective coating
- Large infeed radii for easy and safe loading


Technical features

- Centering bolt type A (standard)
- Sword bolt type B (positioning pin)
- Clamping bolt type C (with centering clearance 0.1 mm)



Standard equipment

Clamping bolt with fixing screw

M12 / M16

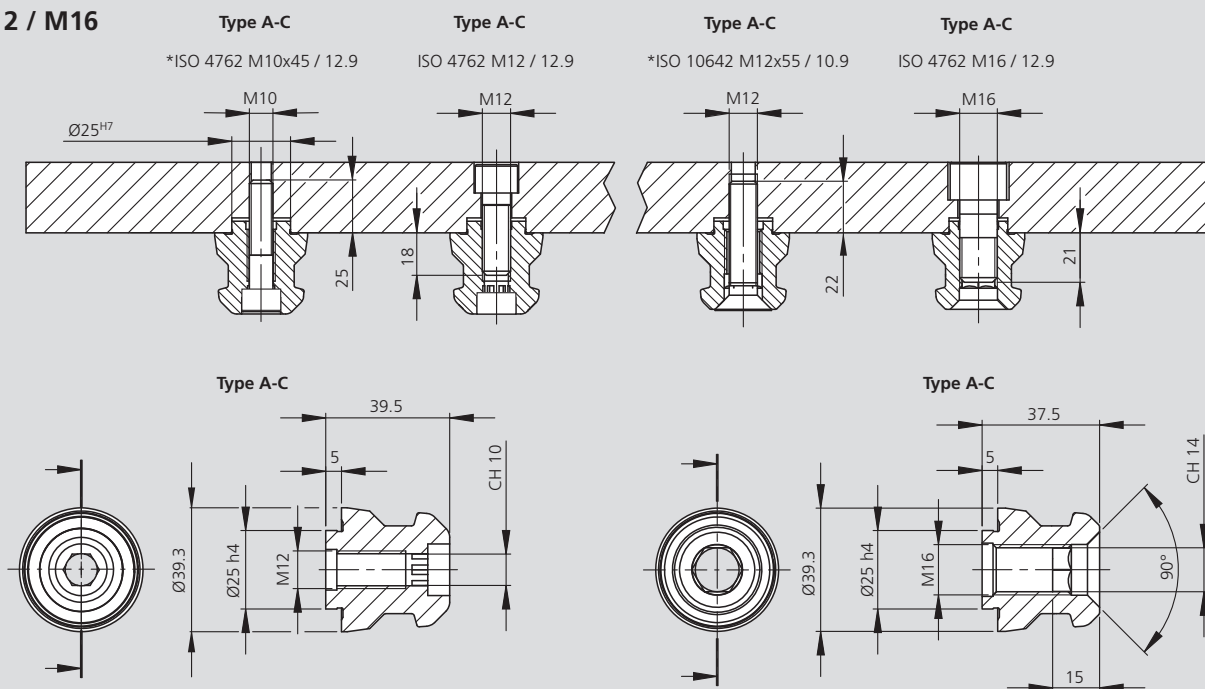

M10 / Type A

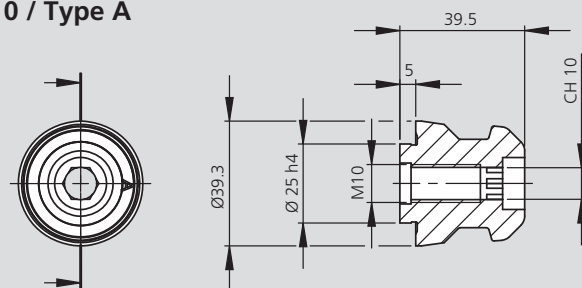

Subject to technical changes. For more detailed information please ask our customer service.


Order numbers

Type	Thread	Type A Id. No.	Type B Id. No.	Type C Id. No.	Weight [kg]
Clamping bolt ZeroAct e-motion	M10 / 12.9	467008	on request	-	0.3
Clamping bolt ZeroAct e-motion	M12 / 12.9	46162355	on request	46162357	0.3
Clamping bolt ZeroAct e-motion	M16 / 12.9	46162455	on request	46162457	0.3

SLX digit 230 compact

Hydraulic long-stroke vise

- Digitized through integrated sensor technology
- Automated quick jaw change
- Self-centering clamping

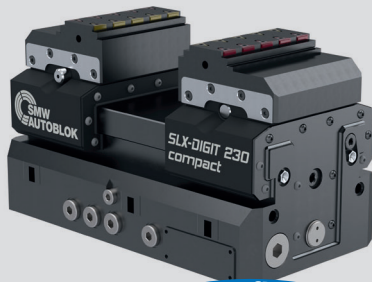

proofline® series
fully sealed – low maintenance

Application/customer benefits

- Integrated sensor technology: Measuring system for jaw position
- Quick jaw change for shortest changeover times, also automatically via robot
- High clamping force for high cutting performance
- Extra long clamping stroke for maximum flexibility
- Integrated safety valves to maintain clamping force in case of pressure drop
- Connection for pressure monitoring
- Hydraulic connection laterally or from below through the connecting plate for highest flexibility
- e-sensing: inductive component detection / distance measurement (optional)

Technical features

- Hydraulic actuation max. 200 bar
- Clamping force max. 39 kN
- Jaw stroke: 35 mm (per jaw)
- Only suitable for O.D. clamping
- **proofline®** = fully sealed – low maintenance

Standart equipment

SLX digit 230 compact

SLX digit 230 compact

Quick jaw change
manual or automatic
via robot

**Extra long
jaw stroke**

e-sensing:
Inductive component
detection/distance mea-
surement
(optional)

Hydraulic connections
laterally or from below

**Extra long and
stable guidance**

Integrated, linear
position sensor (LPS 4.0)

**Sealed
guideway**





Air sensing
Top jaws

Integrated hydraulic
safety valves

Quick jaw change / automated by robot

**Pin actuation for robotic
jaw change**



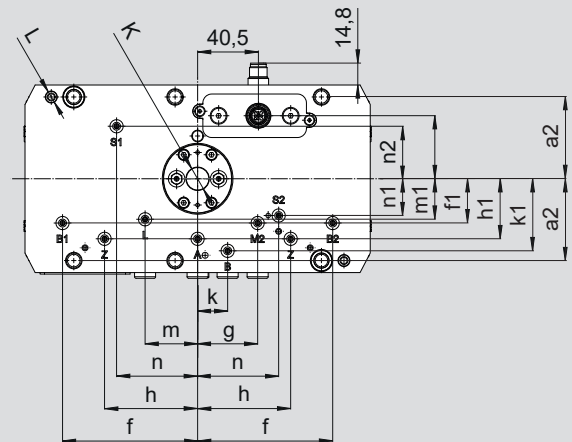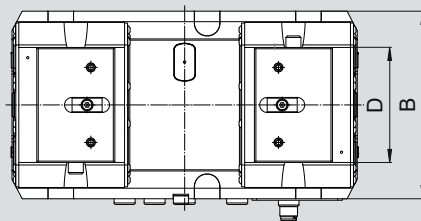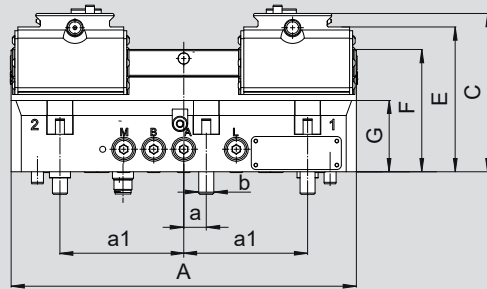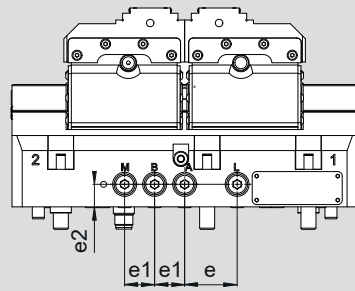

Connection

A	Open
B	Clamping
B1 / B2	Pressure chamber connection (tension) for pressure monitoring for pressure
L	Air sensing top jaw
M	Connection for pressure monitoring
S1 / S2	Connection for slider query
Z*	Control connection non-return valve

Subject to technical changes.
For more detailed information please ask our customer service.

Type			SLX digit 230 compact	
Length	A	mm	230	
	B	mm	125	
Jaw width	C	mm	105,5	
	D	mm	76,6	
	E	mm	96,5	
	F	mm	81,5	
	G	mm	47,5	
Fit	H	mm	-	
Fit	K	mm	Ø 15 ^{H7} x 4	
Mounting hole	L	mm	Ø 8 ^{H7} x 12	
	a / a1 / a2	mm	15 / 82,5 / 54,5	
	b	mm	6 x M10	
	c	mm	-	
	d	mm	-	
	e / e1 / e2	mm	35 / 20 / 15	
	f / f1	mm	90 / 29,5	
	g	mm	40 / 29,5	
	h / h1	mm	62 / 40	
	k / k1	mm	20 / 48	
Max. clamping force	m / m1	mm	35 / 27	
	n / n1 / n2	mm	54 / 24,5 / 35	
	o	mm	-	
Max. operating pressure		bar	200	
Stroke per jaw		mm	35	
Weight		kg	16	

Type	Output signal	Id. No. Standard actuation	Id. No. External stop valve actuation
SLX digit connection sideways	0 - 10 V	462530	462535
SLX digit connection sideways	4 - 20 mA	462531	462536
SLX digit connection below	0 - 10 V	462532	462537
SLX digit connection below	4 - 20 mA	462533	462538
SLX digit without position monitoring	-	462534	462539

* Only for version: External stop valve actuation







SLX digit 230 compact

Hydraulic long-stroke vise

Accessories

- Top jaws
- Connecting cables for LPS 4.0 IO

SLX digit 230 compact Top jaw SinterGrip

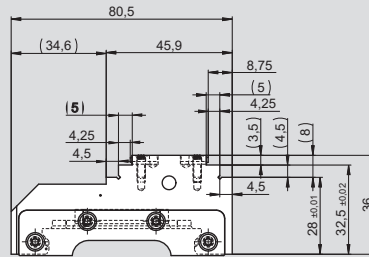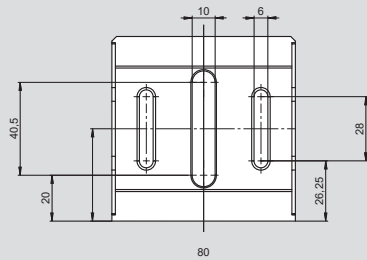

Type	Id. No.	Max. total clamping force	Clamping range with SinterGrip	Clamping range smooth	Weight
SLX digit 230 compact	462550	39 kN	17,5-87,5 / 86,5-156 mm	9-79 / 78-148 mm	1,14 kg

Cable* for LPS 4.0 80 IO	Length	Id. No.
Connecting cable with straight plug M12 x 1 5-pole	5 m	208244
	10 m	208245
	15 m	208246
Connecting cable with angled M12 x 1 5-pole	5 m	208247
	10 m	208248
	15 m	208249



* Shielded PUR cable, 1 side cable end, 1 side with socket M12 x 1, machined and gold-plated contacts.

Notes

SLX digit 335

Hydraulic long-stroke vise

- Digitized through integrated sensor technology
- Automated quick jaw change
- Self-centering clamping



proofline® series
fully sealed – low maintenance

Application/customer benefits

- Integrated sensor technology: Measuring system for jaw position
- Quick jaw change for shortest changeover times, also automatically via robot
- High clamping force for high cutting performance
- Extra long clamping stroke for maximum flexibility
- Integrated safety valves to maintain clamping force in case of pressure drop
- Connection for pressure monitoring
- Hydraulic connection laterally or from below through the connecting plate for highest flexibility
- e-sensing: inductive component detection / distance measurement (optional)

Technical features

- Hydraulic actuation max. 250 bar
- Clamping force max. 75 kN
- Jaw stroke: 55 mm (per jaw)
- Only suitable for O.D. clamping
- **proofline®** = fully sealed - low maintenance

Standard equipment

SLX digit 335

SLX digit 335

Quick jaw change
manual or automatic
via robot

**Extra long
jaw stroke**

**Sealed
guideway**

Hydraulic connections
laterally or from below

**Extra long and
stable guidance**

Integrated, linear
position sensor

Air sensing
Top jaws



Integrated hydraulic
safety valves

Quick jaw change / automated by robot

**Pin actuation for robotic
jaw change**



Dimension and technical data

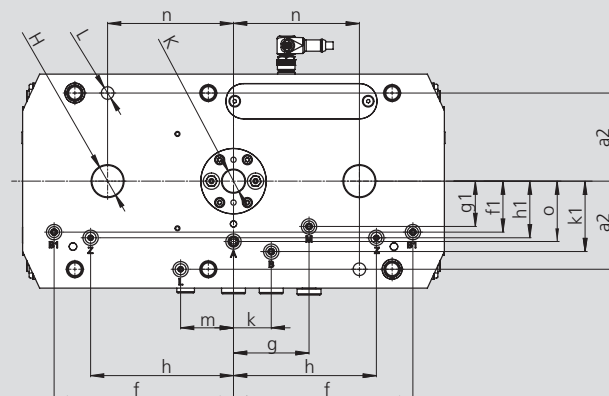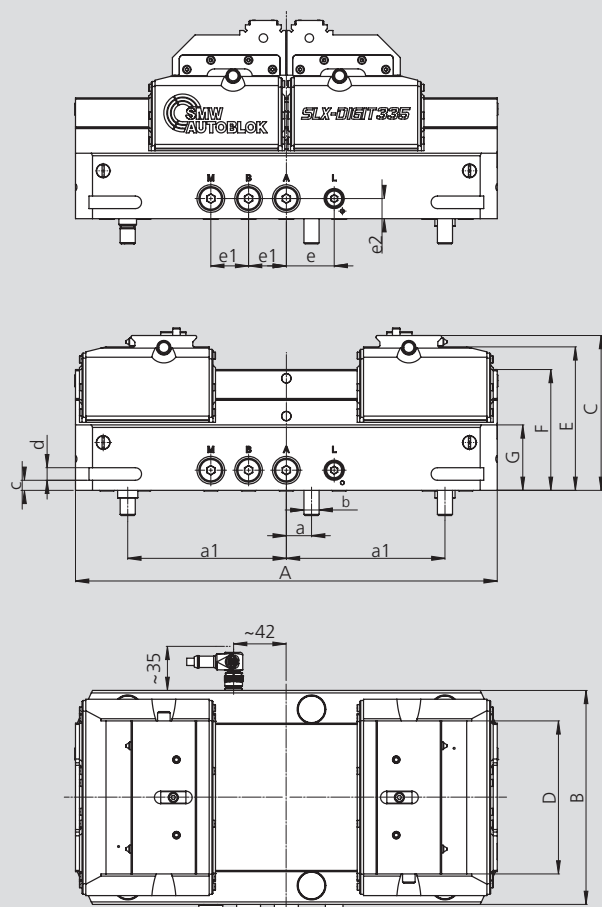

Connection

A	Open
B	Clamping
B1	Pressure chamber connection (tension) for pressure monitoring for pressure
L	Air sensing top jaw
M	Connection for pressure monitoring
Z*	Control connection non-return valve

Subject to technical changes.

For more detailed information please ask our customer service.

Type			SLX digit 335
Length	A	mm	335
	B	mm	170
Jaw width	C	mm	123
	D	mm	121.6
	E	mm	114
	F	mm	96
	G	mm	52
	H	mm	Ø 25 ^{H7} x 5.5
Fit	K	mm	Ø 18 ^{H7} x 5.5
Fit	L	mm	Ø 10 ^{H7} x 12
Mounting hole	a / a1 / a2	mm	20 / 126 / 70
	b	mm	6 x M12
	c	mm	8
	d	mm	10
	e / e1 / e2	mm	38 / 30 / 16
	f / f1	mm	142.5 / 40.5
	g / g1	mm	60 / 36
	h / h1	mm	113.5 / 45
	k / k1	mm	30 / 56
	m / m1	mm	42 / -
	n	mm	100
	o	mm	48
Max. clamping force		kN	75
Max. operating pressure		bar	250
Stroke per jaw		mm	55
Weight		kg	35.5

Type	Output signal	Id. No. Standard actuation	Id. No. External stop valve actuation
SLX digit connection sideways	0 - 10 V	461750	461745
SLX digit connection sideways	4 - 20 mA	461751	461746
SLX digit connection below	0 - 10 V	461752	461747
SLX digit connection below	4 - 20 mA	461753	461748
SLX digit without position monitoring	-	461754	461749

* Only for version: External stop valve actuation

SLX digit 335







Hydraulic long-stroke vise

Accessories

- Top jaws
- Connecting cables for LPS 4.0 IO

SLX digit 335




Top jaw SinterGrip

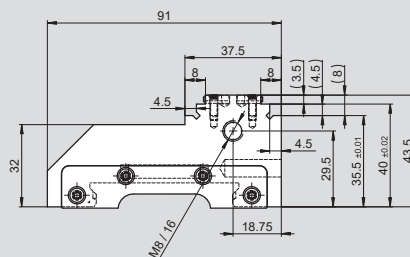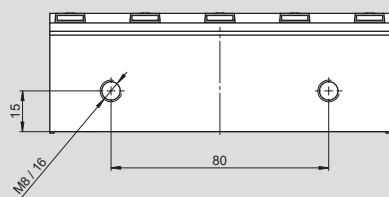

Type	Id. No.	Max. total clamping force	Clamping range with SinterGrip	Clamping range smooth	Weight
SLX digit 335	461521	75 kN	14,5-223,5 / 123-232 mm	9-118 / 116-225 mm	2,5 kg

SLX digit 335-H45




Soft top jaw



Type	Id. No.	Max. total clamping force	Min. jaw height	Weight
SLX digit 335-H45	461523	75 kN	32 mm	3,5 kg

SLX digit 335-H65

Soft top jaw high

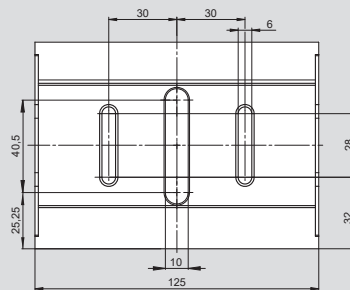


Type	Id. No.	Max. total clamping force	Min. jaw height	Weight
SLX digit 335-H65	461525	75 kN	32 mm	5,2 kg

Cable* for LPS 4.0 80 IO	Length	Id. No.
Connecting cable with straight plug M12 x 1 5-pole	5 m	208244
	10 m	208245
	15 m	208246
Connecting cable with angled M12 x 1 5-pole	5 m	208247
	10 m	208248
	15 m	208249



* Shielded PUR cable, 1 side cable end, 1 side with socket M12 x 1, machined and gold-plated contacts.

Integration example with inductive coupling system

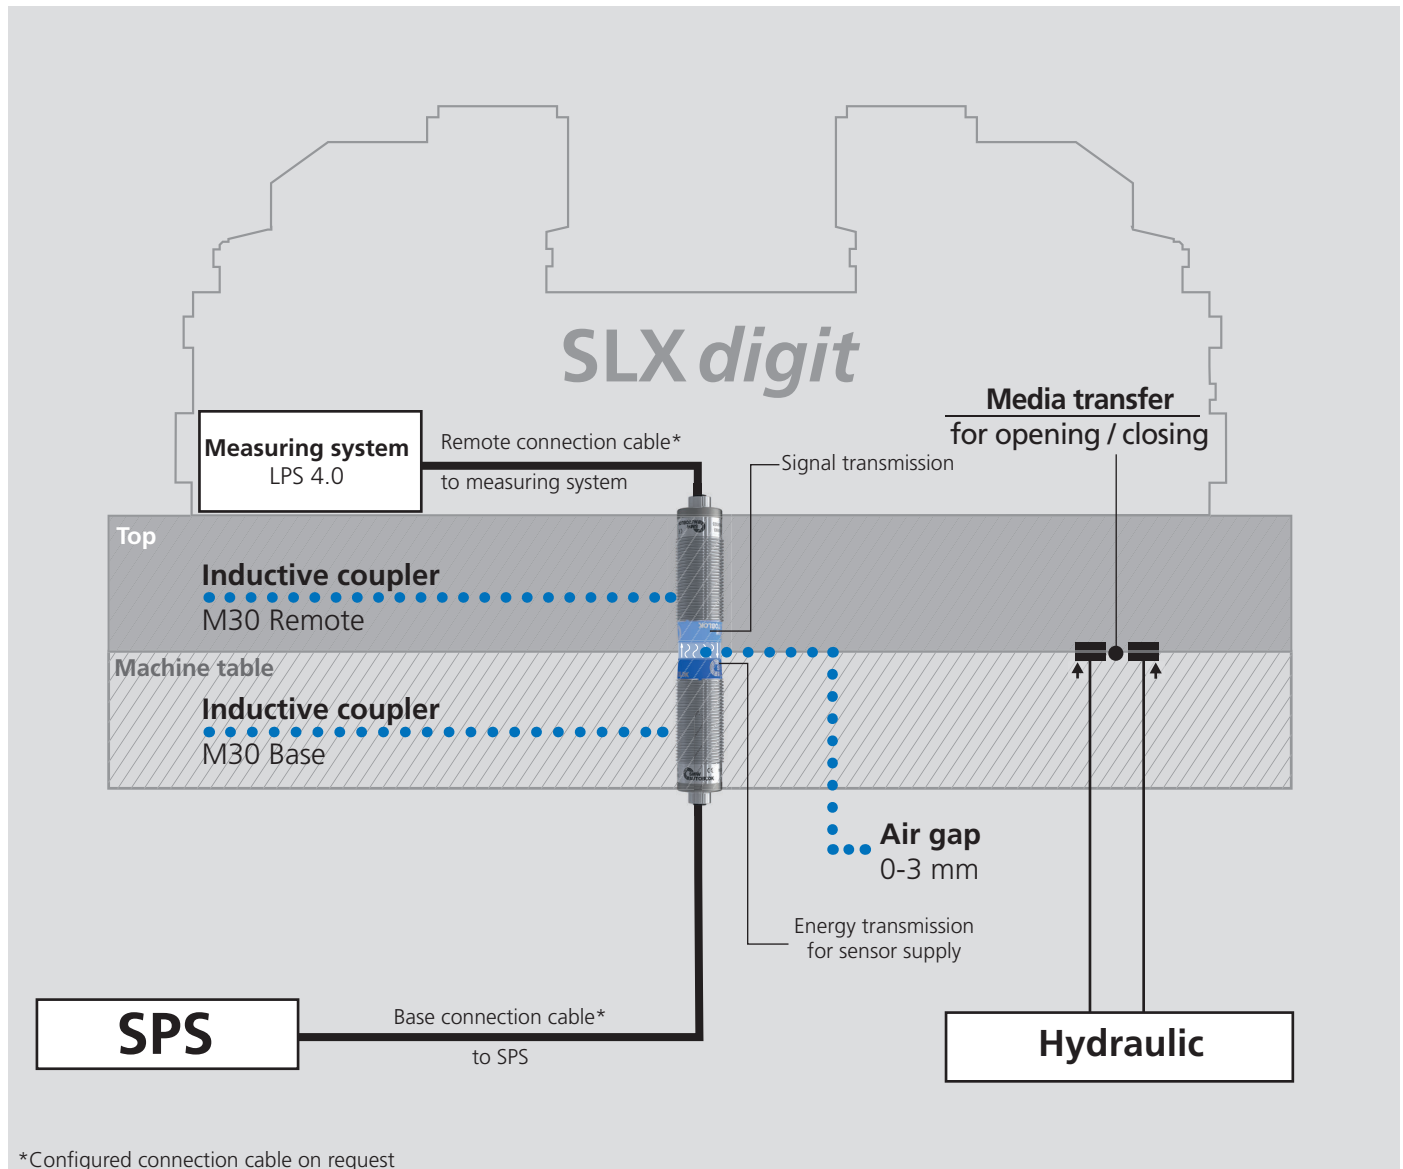

Suitable inductive coupling systems


M30

- Cylindrical design




F60S

- Flat design with hole



C40 Automation

- Cubic flat design
- Ideal for changeover applications

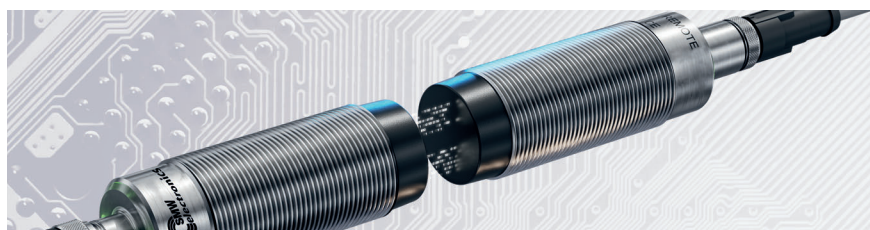

Further information at
www.smw-electronics.com

SLX e-motion 335 compact

Mechatronic long-stroke vise

- Monitoring of the jaw position / clamping force
- Mechanical maintenance of clamping force in case of power failure



Application/customer benefits

- Mechatronic clamping drive with maintenance of clamping force due to self-locking, spring pack and engine brake
- High total clamping force* 2,5 kN - 27 kN for high cutting performance
- Pre-positioning and clamping force presetting
- Extra long jaw stroke, 55 mm per jaw
- Permanent monitoring of the clamping force and jaw position
- Side connections for power and sensors - bottom connections optional
- e-sensing: inductive component detection / distance measurement (optional)

Technical features

- Total clamping force* 2,5 kN - 27 kN, Close / Open
- Jaw stroke: 55 mm - repeatability ± 0.02 mm
- Self centering clamping (only O.D. clamping)
- Jaw width: 154 mm
- Power supply: 24 V (48 V) / 7,5 A
- Communication interface: Profinet - 2 STO Signals
- Protection class: IP67

Standard equipment

SLX e-motion 335 compact

SLX e-motion 335 compact

- Self centering function via mechanical synchronisation

Monitoring of the clamping force and jaw position

Sealed jaw guideway

Extra long jaw stroke

Mechanical maintenance of clamping force in case of power failure

M23 hybrid plug
Power 24 V / 7,5 A
Profinet

LED for status



Plug & Play




SLX e-motion 335 compact



Integrated control

* Arithmetic sum of all movable clamping points

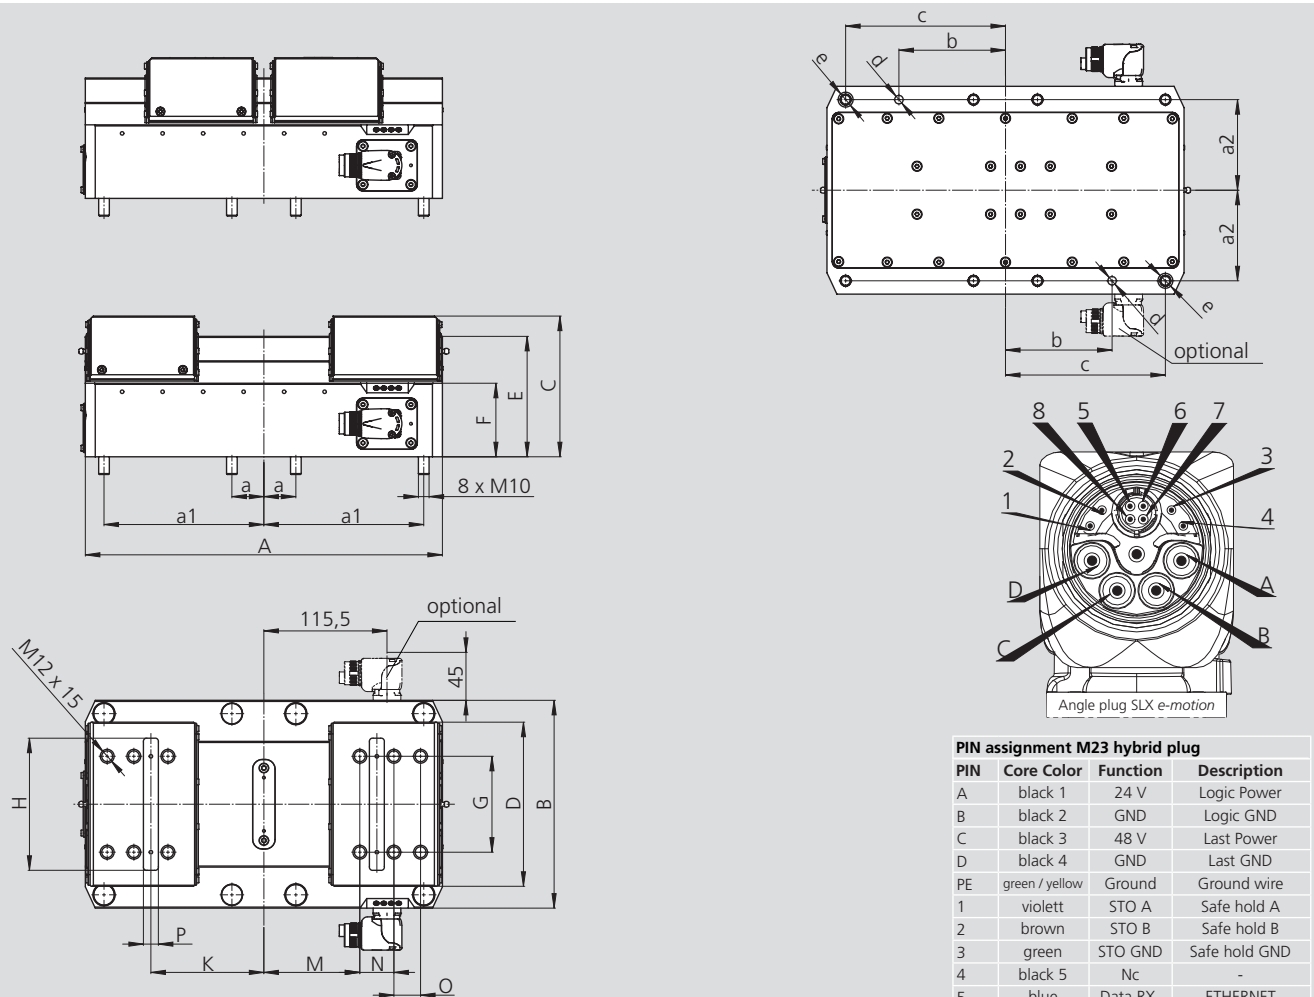

Subject to technical changes.
For more detailed information please ask our customer service.

PIN assignment M23 hybrid plug			
PIN	Core Color	Function	Description
A	black 1	24 V	Logic Power
B	black 2	GND	Logic GND
C	black 3	48 V	Last Power
D	black 4	GND	Last GND
PE	green / yellow	Ground	Ground wire
1	violett	STO A	Safe hold A
2	brown	STO B	Safe hold B
3	green	STO GND	Safe hold GND
4	black 5	Nc	-
5	blue	Data RX-	ETHERNET
6	yellow	Data TX+	ETHERNET
7	white	Data RX+	ETHERNET
8	orange	Data TX-	ETHERNET

Type			SLX e-motion 335 compact
Id. No.			461960
Length	A	mm	335
	B	mm	195
Jaw width	C	mm	132
	D	mm	154
	E	mm	113
	F	mm	69
	G	mm	90
	H	mm	124
Min. / Max.	K	mm	51 / 106
Min. / Max.	M	mm	35 / 90
	N	mm	32
	O	mm	25
	P	mm	14 H ⁷ / 4 tief
	a / a1 / a2	mm	30 / 150 / 85
	b	mm	100 ± 0.02
	c	mm	150 ± 0.02
	d	mm	Ø8 H ⁷
	e	mm	Ø14 H ⁷
Max. clamping force		kN	27
Stroke per jaw		mm	55
Repeatability		mm	0.02
Traversing speed per jaw		mm/s	2
Voltage (actuators)		V	22 ... 49
Max. Current consumption (actuators)		A	7.5
Voltage (sensors)		V	24 V
Max. Current consumption (sensors)		A	0.5 A
Communication interface			Profinet
STO signals (option)			2
Max. workpiece weight		kg	270
Weight		kg	44,3

SLX e-motion 520

Mechatronic long-stroke vise

- Monitoring of the jaw position / clamping force
- Mechanical maintenance of clamping force in case of power failure



Application/customer benefits

- Mechatronic clamping drive with maintenance of clamping force due to self-locking, spring pack and engine brake
- High total clamping force* up to 40 kN for high cutting performance
- Pre-positioning and clamping force presetting
- Extra long jaw stroke, 99 mm per jaw
- Permanent monitoring of the clamping force and jaw position
- Side connections for power and sensors - bottom connections optional
- e-sensing: inductive component detection / distance measurement (optional)


Technical features

- Total clamping force* max. 40 kN, Close / Open
- Jaw stroke: 99 mm - repeatability ± 0.02 mm
- Self centering clamping (only O.D. clamping)
- Jaw width: 160 mm
- Power supply: 48 V / 10 A
- Communication interface: Profinet / EtherNet/IP - 2 STO Signals
- Protection class: IP67

Standard equipment

SLX e-motion 520


SLX e-motion 520

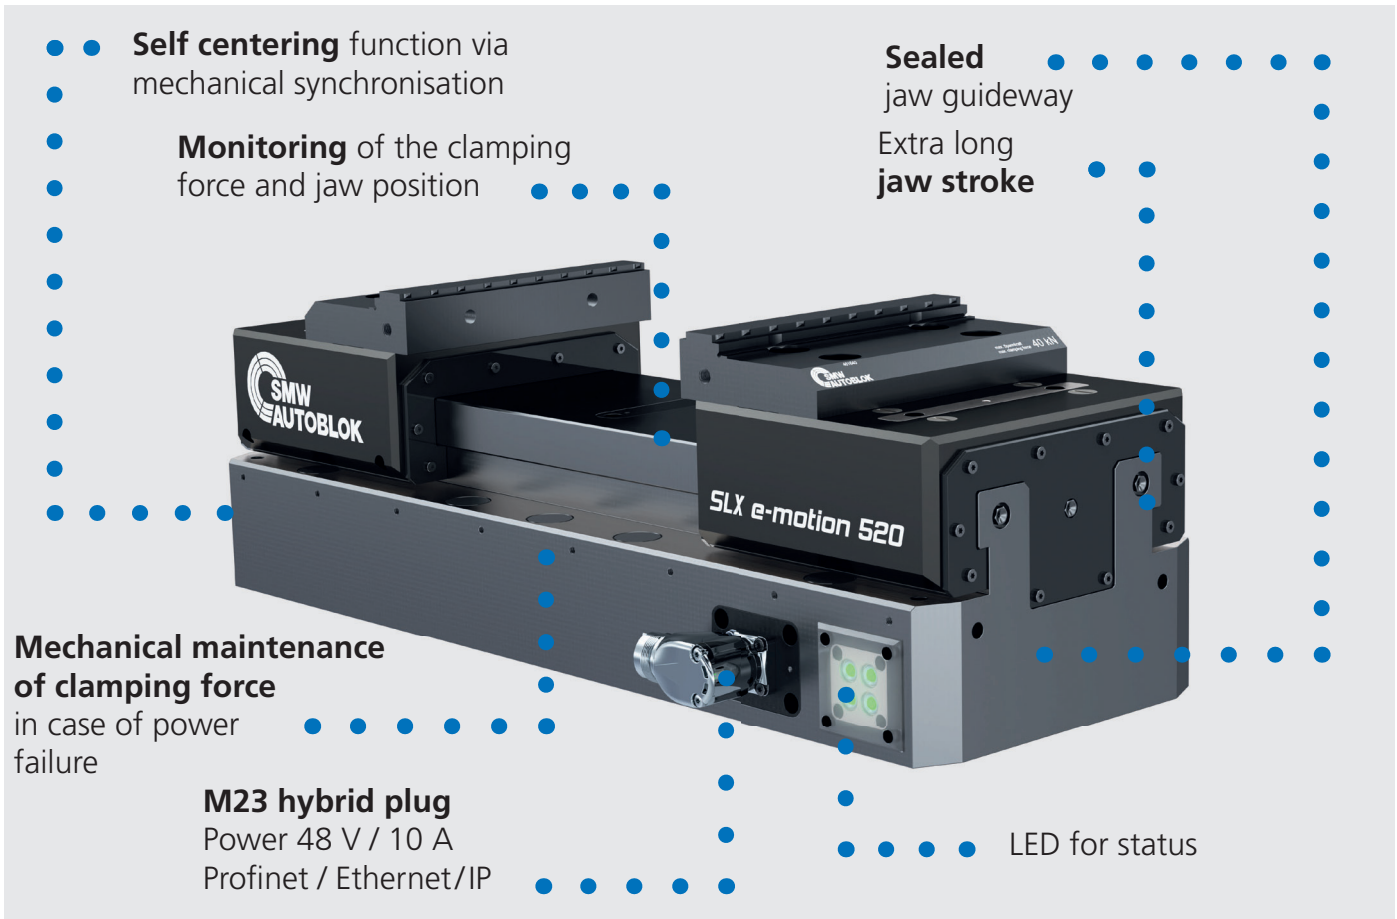

Plug & Play



* Arithmetic total of all moving clamping






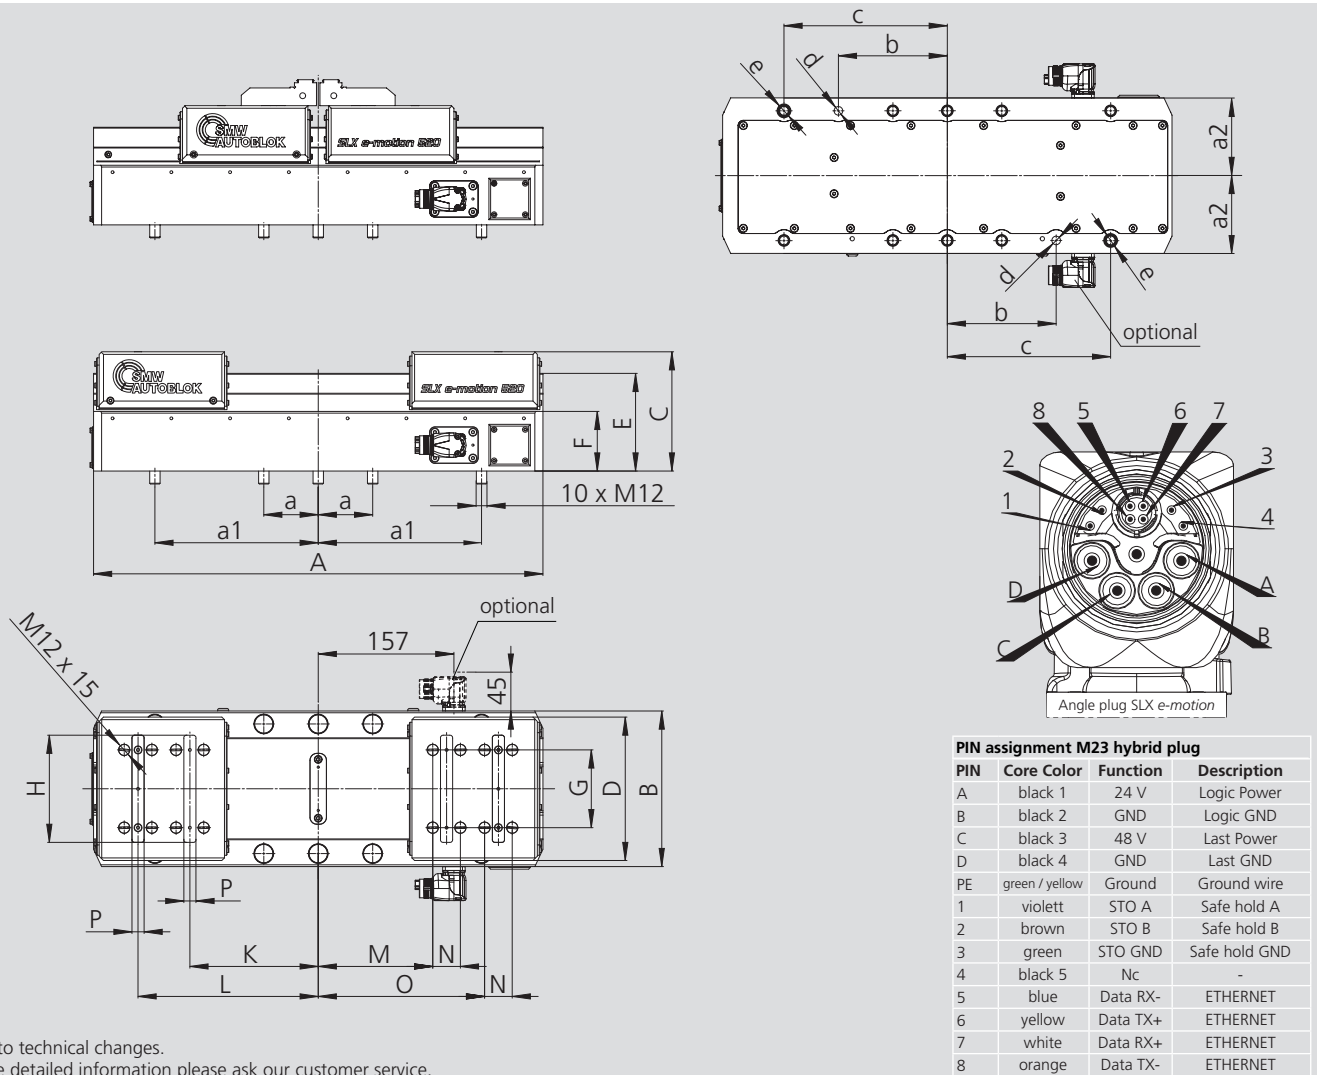


PIN assignment M23 hybrid plug			
PIN	Core Color	Function	Description
A	black 1	24 V	Logic Power
B	black 2	GND	Logic GND
C	black 3	48 V	Last Power
D	black 4	GND	Last GND
PE	green / yellow	Ground	Ground wire
1	violett	STO A	Safe hold A
2	brown	STO B	Safe hold B
3	green	STO GND	Safe hold GND
4	black 5	Nc	-
5	blue	Data RX-	ETHERNET
6	yellow	Data TX+	ETHERNET
7	white	Data RX+	ETHERNET
8	orange	Data TX-	ETHERNET

Type			SLX e-motion 520 PROFINET	SLX e-motion 520 ETHERNET / IP
Id. No.			461600	461900
Length	A	mm	520	
	B	mm	180	
	C	mm	138	
Jaw width	D	mm	166	
	E	mm	113	
	F	mm	69	
Min. / Max.	G	mm	90	
	H	mm	124	
	K	mm	49.5 / 148.5	
Min. / Max.	L	mm	109.5 / 208.5	
	M	mm	33.5 / 132.5	
	N	mm	32	
Min. / Max.	O	mm	93.5 / 192.5	
	P	mm	14 H ⁷ / 4 tief	
	a / a1 / a2	mm	63 / 189 / 75	
	b	mm	126 ± 0.02	
	c	mm	189 ± 0.02	
	d	mm	Ø10 H ⁷	
	e	mm	Ø16 H ⁷	
Max. clamping force			kN	40
Stroke per jaw			mm	99
Repeatability			mm	0.02
Traversing speed per jaw			mm/s	1.2
Voltage (actuators)			V	48
Max. Current consumption (actuators)			A	10
Voltage (sensors)			V	24 V ± 10%
Max. Current consumption (sensors)			A	0.5 A
Communication interface			Profinet	EtherNET/IP
STO signals (option)				2
Max. workpiece weight			kg	400
Weight			kg	69,8

- Top jaws
- Connector cable

Hardened top jaw

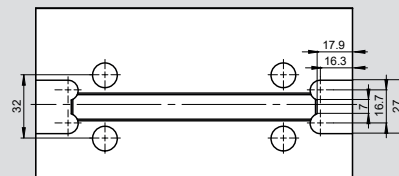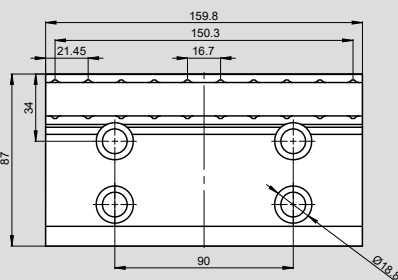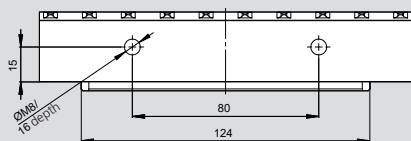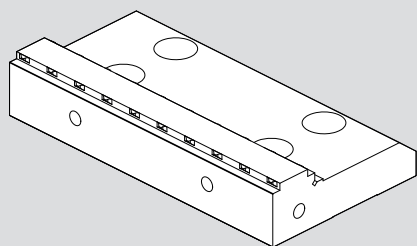

*1 Set = 2 pieces

Type	Id. No.	Max. total clamping force	Min. jaw height	Weight
SLX e-motion	461640	40 kN	20.5 mm	2.5 kg

M23 HYBRID CONNECTOR CABLE (male connector one-sided, open cable end)



Type	M23 Connector cable 3M	M23 Connector cable 7.5M	M23 Connector cable 10M
Id. No.	0E013566	0E013016	0E013567
Length	3 m	7.5 m	10 m
Cable structure	(5x 2.5 + 2x (2x 0.5) + (4 x 0.34) C) C		
Outer cable diameter	15.50 mm ± 0.5 mm		
Outer casing material	PUR		
Outer casing colour	orange RAL 2003		
Nominal voltage cable	1000 V (300 V signal)		
Smallest bending radius fixed	73 mm		
Smallest bending radius flexible	148 mm		
Ambient temperature	-40° C ... 80°C		
Special features	suitable for drag chains		

Notes

- Normal stroke / centric clamping
- Monitoring of the jaw position / clamping force
- Mechanical maintenance of clamping force in case of power failure

Application/customer benefits

- Mechatronic clamping drive with maintenance of clamping force due to self-locking
- High total clamping force* max. 42 kN for high cutting performance
- Pre-positioning for fast loading / unloading
- Jaw stroke, 3 mm per jaw
- Permanent monitoring of the jaw position
- e-sensing: inductive component detection / distance measurement (optional)

Technical features

- Total clamping force* max. 42 kN, Close / Open
- Jaw stroke: 3 mm - repeatability ± 0.02 mm
- Self centering clamping
- Jaw width: 78 mm
- Power supply: 24 V / max. 4 A
- Communication interface: IO-Link
- Protection class: IP67

Standard equipment

SL e-motion without top jaws

All bolts and centering bushings included



IO-Link



SL e-motion

- **Self centering** function via mechanical synchronisation

- **e-sensing (optional)** inductive component detection

- **Monitoring** of the jaw position

- **Sealed** jaw guideway

- **Mechanical maintenance of clamping force** in case of power failure

- **LED-Status**

- **IO-Link interface** for plug & work integration



Plug & Play




SL e-motion



Integrated control

* Arithmetic total of all moving clamping

Dimension and technical data

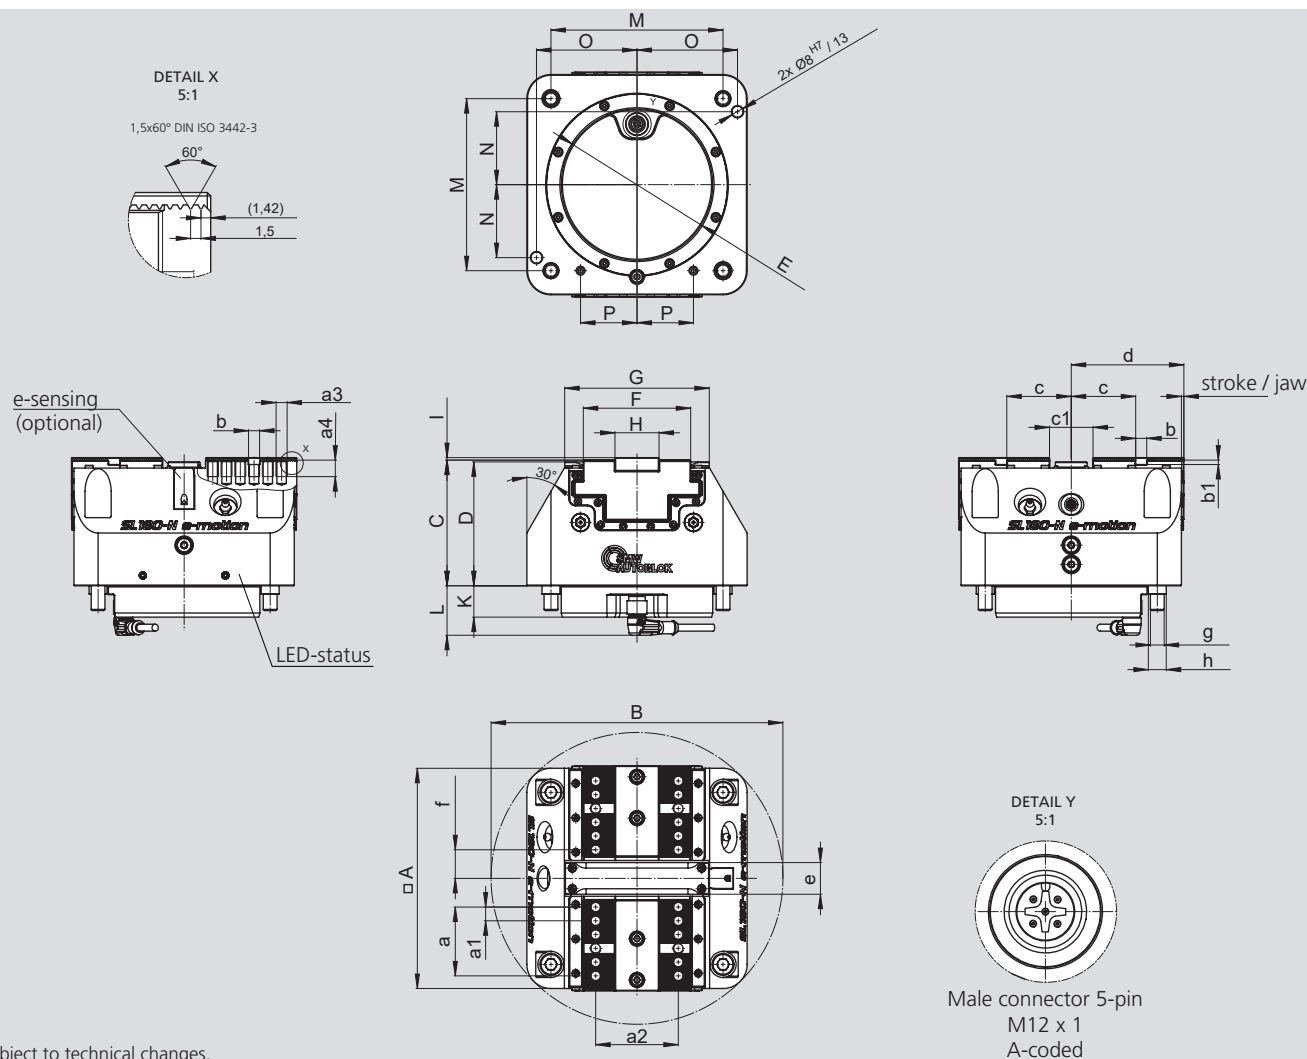


Subject to technical changes.
For more detailed information please ask our customer service.

Type			SL e-motion
Id. No.			460720
Jaw width	A	mm	160
	B	mm	Ø 212
	C	mm	91.3
	D	mm	90
	E	mm	Ø 110
	F	mm	78
	G	mm	105
	H	mm	32 g ⁶
	K	mm	23
	L	mm	36
	M	mm	125
	N	mm	53
	O	mm	73
	P	mm	41
a / a1 / a2 / a3 / a4			50 / 10 / 60 / M8 / 12
b / b1			Ø8 H ⁷ / 3.2
Min. - Max.	c / c1	mm	45 - 48 / 29 - 35
Min. - Max.	d	mm	80 - 83
Min. - Max.	e	mm	23
	f	mm	19 - 22
	g	mm	M10
	h	mm	Ø13 js ⁷
Max. clamping force			kN 42
Stroke per jaw			mm 3
Repeatability			mm 0.02
Voltage			V 24
Max. Current consumption (actuators)			A 4
Protection class			IP 67
Communication interface			IO-Link


RT e-motion

Mechatronic tombstone with 8 integrated drives

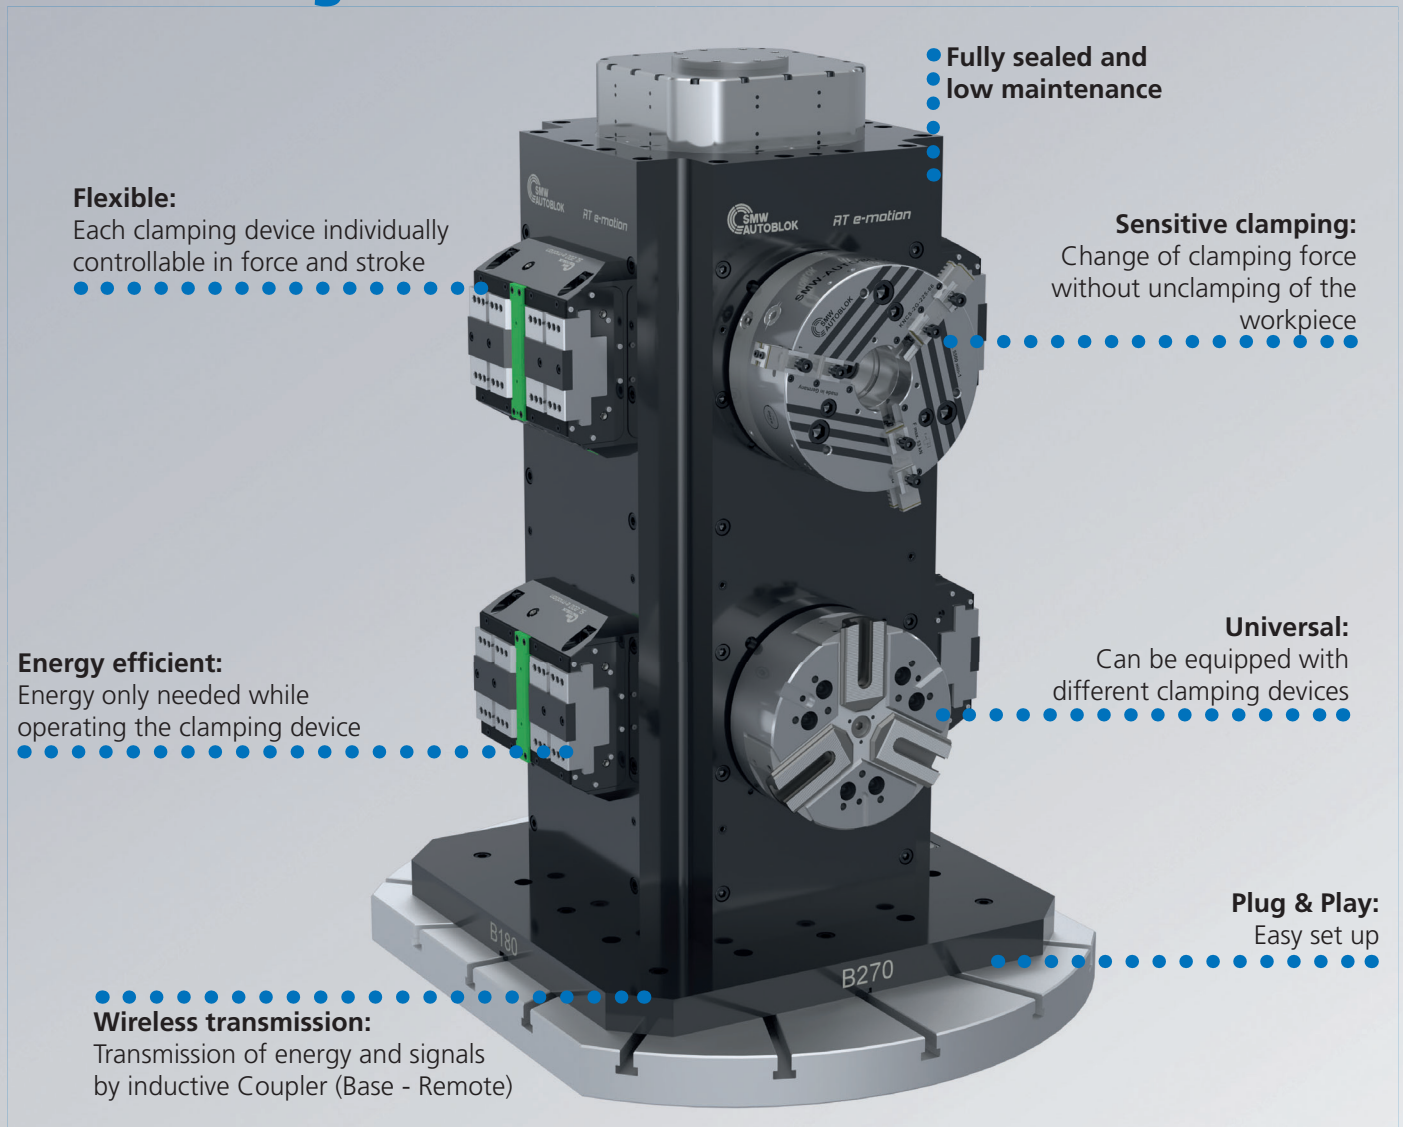


Arrangement of actuating drives

Per clamping station - one actuating drive

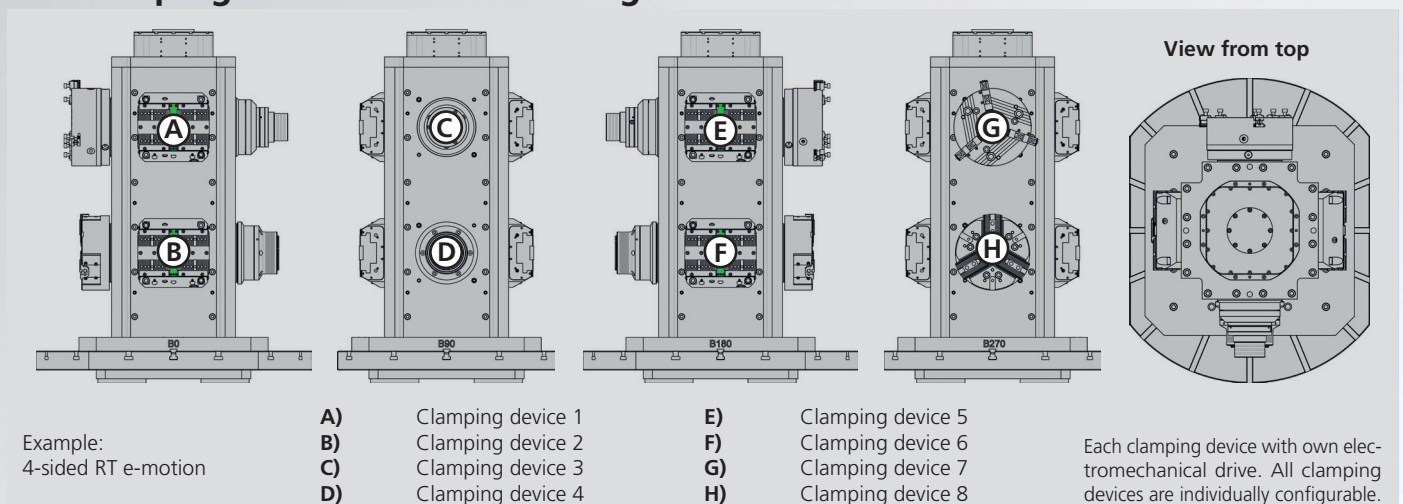


Function of the inductive coupler

Inductive transmission of energy and signals

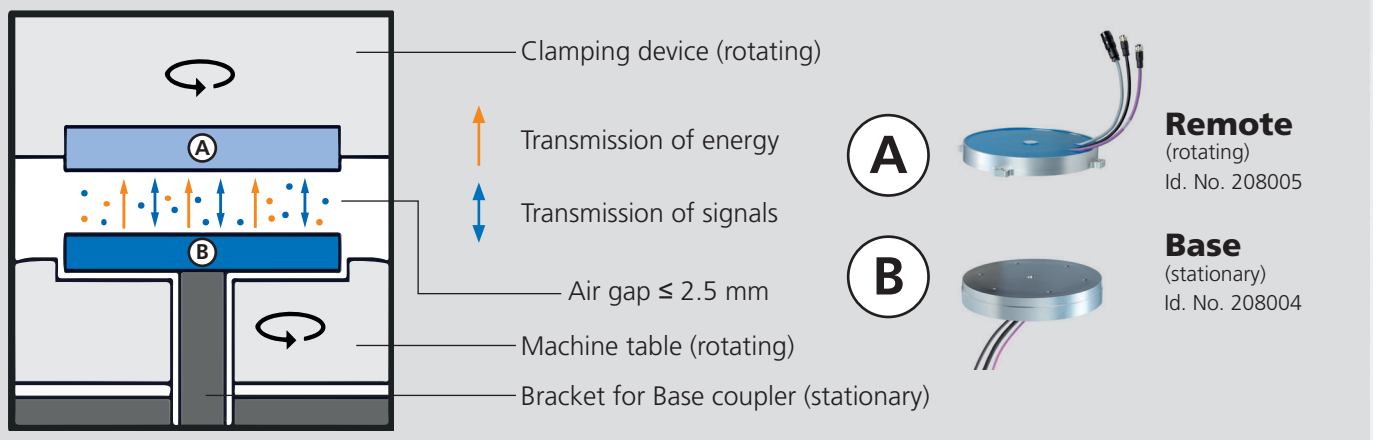

Exchange connectivity

Exchange within SMW-AUTOBLOK *e-motion* series possible

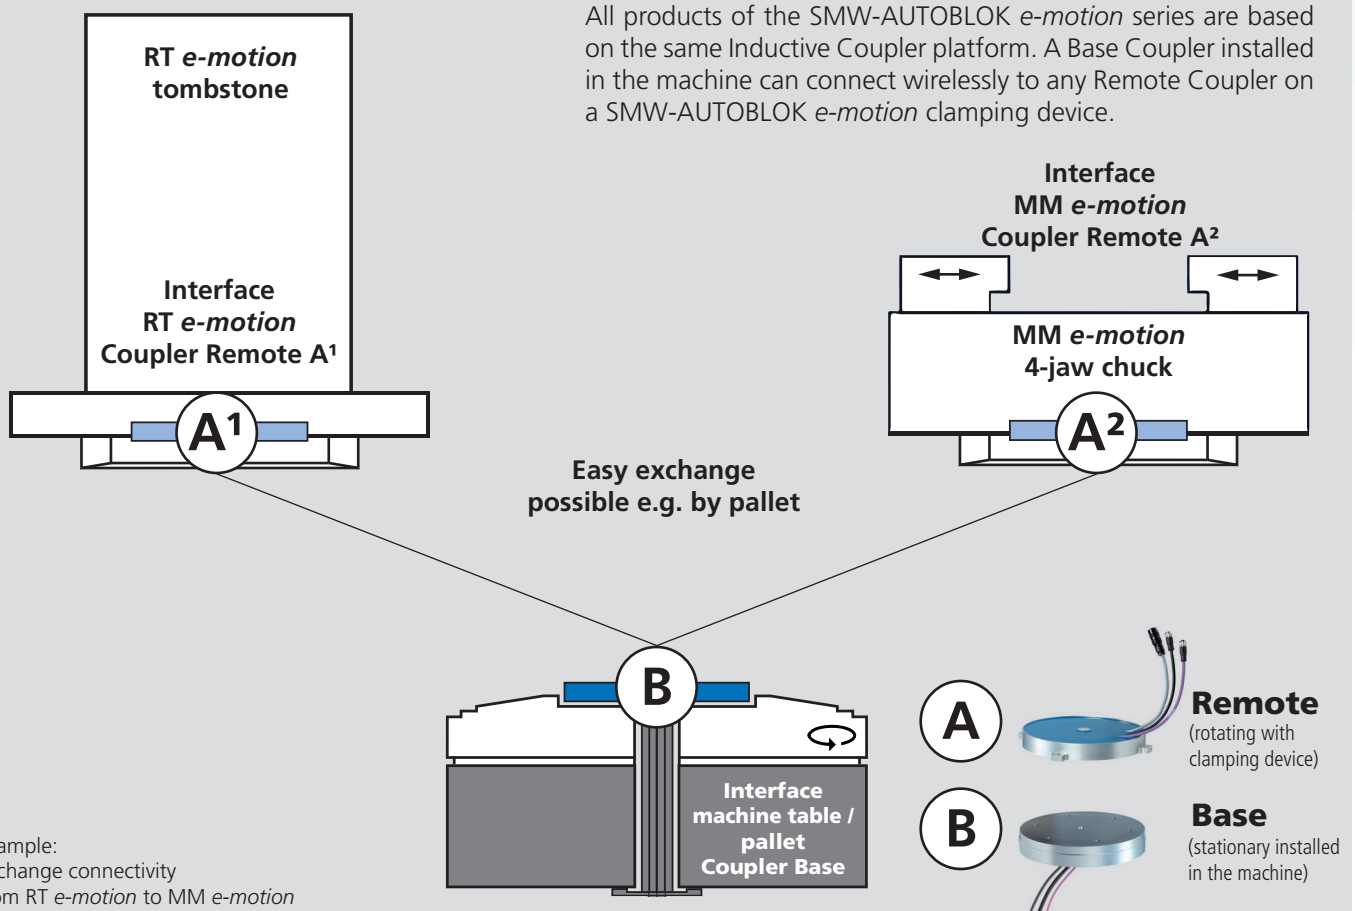

- Each clamping device can be controlled individually
- Contact free transmission of energy and data



Application/customer benefits

- Each clamping device can be controlled individually
- Contact free transmission of energy and signals via inductive Coupler system
- Clamping stations can be equipped individually
- Permanent monitoring of the clamping force and clamping positions
- Various strokes and forces individually programmable
- Plug & Play

Technical data

- Sensitive clamping / change of the clamping force without unclamping the workpiece
- Max. operating force for each clamping device 35 kN
- Axial stroke for each clamping device 21 mm
- **proofline®** = fully sealed – low maintenance


Standard equipment

RT e-motion tombstone incl. actuating drives without clamping device

Occupancy options of the clamping stations


RT e-motion:

Display of tombstone incl. actuating drives without clamping devices.

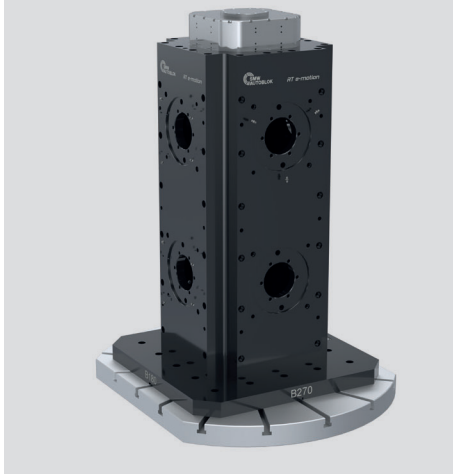

RT e-motion with clamping devices:


Display of RT e-motion incl. actuating drives with clamping devices.


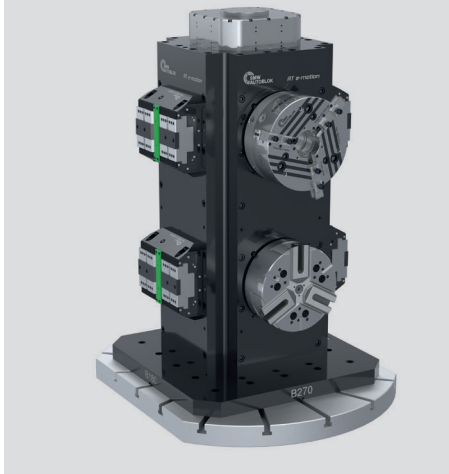


Different clamping devices RT e-motion:

- Power vises
- Power chucks
- Pull-down chucks
- Compensating chucks
- Quick jaw change power chucks
- 6-jaw chucks
- Collet chucks
- Grippers
- Mandrels

Plug & Play

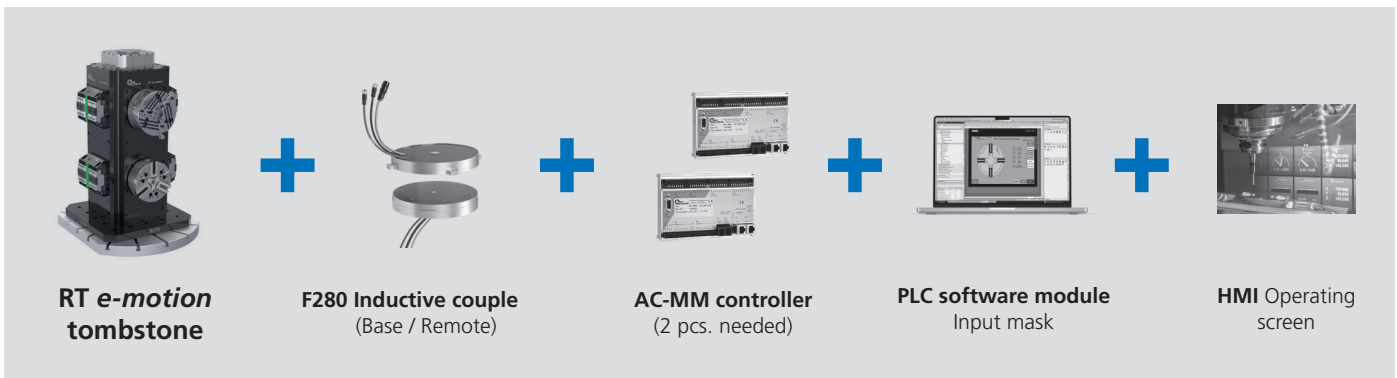

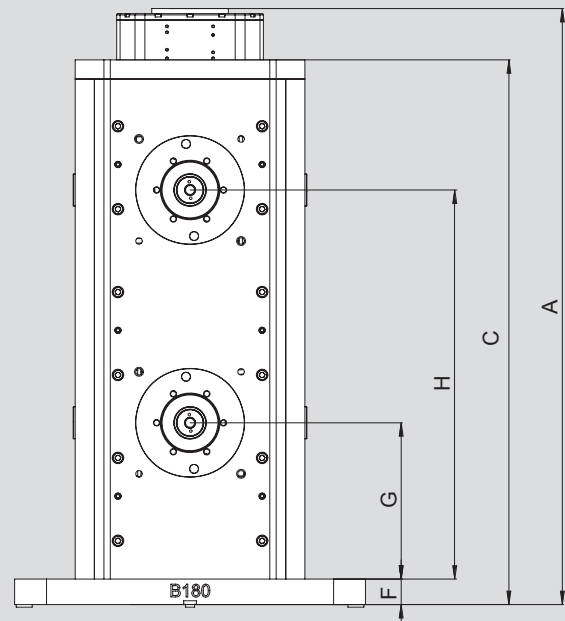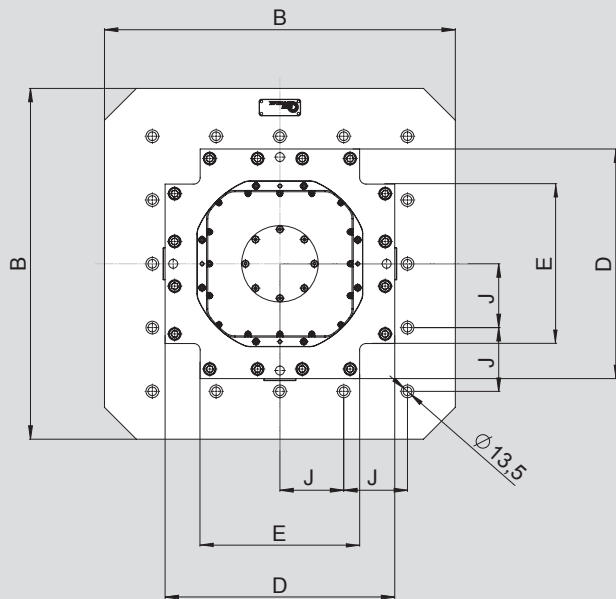Dimensions and technical data


Subject to technical changes.
For more detailed information please ask our customer service.

Type			RT e-motion
Id. No.			463080
Height	A	mm	934.5
Width	B	mm	550
Height tombstone	C	mm	854
Total width of clamping station	D	mm	360
Support width of clamping station	E	mm	250
Height baseplate	F	mm	40
Clamping station	G	mm	245
Clamping station	H	mm	610
Position mounting holes	J	mm	100
Max. actuation force		kN	35
Max. effective axial actuation stroke		mm	21
Number of clamping stations		pcs.	8
Weight (without clamping devices)		kg	485

Customized designs on request.

Centco4 *digit*-HLW

INCH
SERRATION

Hydraulic 4-jaw power chuck

■ Digitized by integrated sensor technology

Application/customer benefits

- Chuck with integrated sensoric technology
- Monitoring of different process parameters even during machining
- Non-contact power supply for sensors and signal output by means of inductive couplers
- Integrated hydraulic actuation with safety system

Technical data


- Clamping force 130 kN
- Max. Operating pressure 80 bar
- Jaw stroke 12 mm
- **proofline®** = fully sealed – low maintenance

Standard equipment

4-jaw chuck

Ordering example

4-jaw chuck
Centco4 *digit*-HLW

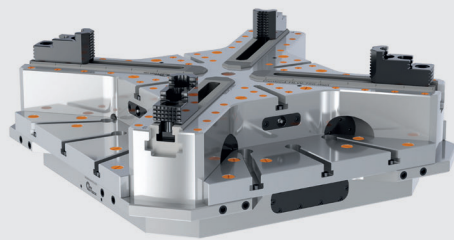

proofline® series
fully sealed – low maintenance

Centco4 *digit*-HLW

4 x IO-Link Interfaces

Safety features:

Integrated sensoric

- Pressure monitoring (optional Profinet Safe)
- Position monitoring
- End position monitoring

Mechanical interlock (optional)

4 x Air Sensing
(Air system control)

Integrated pressure accumulator
to maintain the clamping force


Machine pallet
customized

Weight optimized
chuck body

Low profile design
thanks to innovative
tangential piston technology

■ Dimension and technical data

INCH
SERRATION

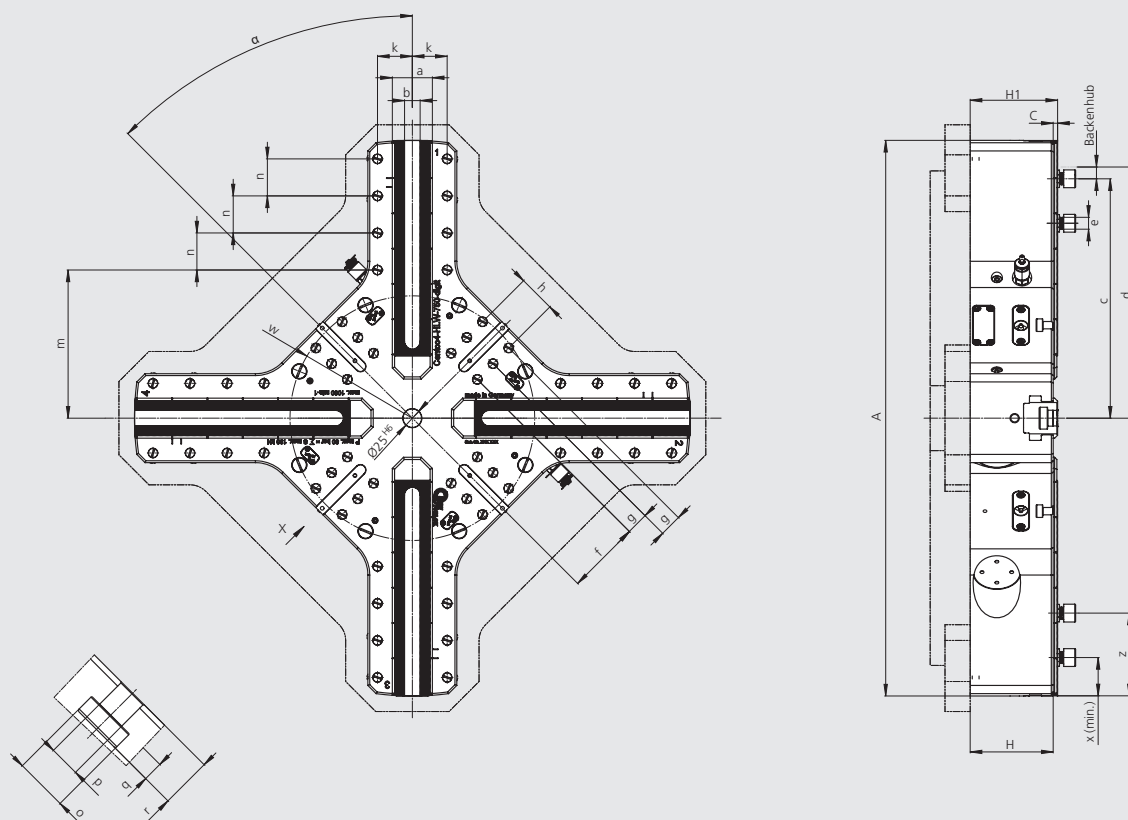


Subject to technical changes. For more detailed information please ask our customer service.

Type			Centco4 digit HLW 750-4	
Id.-No.			On request	
Outside diameter	A	mm	750	
Base plate height	B	mm		
	C	mm	6	
Chuck height	H	mm	112	
	H1	mm	118	
Jaw width	a	mm	54	
Slot width	b	H8 mm	21	
Jaw position min.	c	mm	363	
Jaw position max.	d	mm	375	
Bolt ISO4762-12.9	e	mm	M16	
	f	mm	99	
	g	mm	2 x 30	
	h	mm	50	
	k	mm	47	
	m	mm	200	
	n	mm	3 x 50	
T-slot width	o	mm	24	
T-slot width	p	mm	14	
Height of width o	q	mm	9	
Total depth T-slot	r	mm	23	
	s/s¹	mm		
	t/t¹	mm		
	u/u¹	mm		
	w	mm	330.2	
Min.	x	mm	12.5	
Min. / max.	z	mm	25 / 245	
	α	deg.	45°	
	β	deg.		
	γ	deg.		
Serration		inch	1/16" x 90°	
Max. speed		min ⁻¹	1000	
Max. total clamping force		kN	130	
Stroke per jaw		mm	12	
Compensation stroke per jaw		mm	10	
Weight (without jaws)		kg	Customized	
Moment of inertia		kg·m²	Customized	

INCH
SERRATION


■ Jaws*

MHB-D (INCH SERRATION) Hard, reversible stepped Top jaws




Centco4 digit-HLW	750-4
Jaw type	MHB-D 251
Id. No.	12083038
Serration	1/16" x 90°
B	45
H	56
L	106.2
T	13.5
N	21
a	26
b	30
c	30
kg / set	3.89

MWB-D (INCH SERRATION) Soft top jaws Tall version




Centco4 digit-HLW	750-4
Jaw type	MWB-D 250
Id. No.	5319680
Serration	1/16" x 90°
B	50
H	80
L	120
N	21
a	62
b	28
kg / set	9.2

AWB-D (INCH SERRATION) Soft top jaws Low version




Centco4 digit-HLW	750-4
Jaw type	AWB-D 250
Id. No.	5319681
Serration	1/16" x 90°
B	50
H	50
L	120
N	21
a	90
b	28
kg / set	8.3

SBS-D (INCH SERRATION) Soft pie jaws



Centco4 digit-HLW	750-4
Jaw type	SBS-D 600/4
Id. No.	5322250
Serration	1/16" x 90°
B	330
B1	50
D	190
H	85
L	140
N	21
a	75
b	29
kg / set	56.3

SBA-D (INCH SERRATION) Soft pie jaws aluminum Light version





Centco4 digit-HLW	750-4
Jaw type	SBA-D 600/4
Id. No.	5322254
Serration	1/16" x 90°
B	330
B1	50
D	190
H	85
L	140
N	21
a	75
b	29
kg / set	20.1

* SMW-AUTOBLOK is recommending not to clamp any diameters, that are larger than the chuck O.D. For more detailed information please ask our customer service.
SMW-AUTOBLOK Jaws-catalog Request or download: www.smw-autoblok.com


- Clamping ranges*
- Grease

INCH
SERRATION

MHB-D (INCH SERRATION) Hard, reversible stepped Top jaws



Clamping ranges



Centco4 digit-HLW		750-4
Jaw type		MHB-D200
Id. No.		12083038
A1		101-609
A2		-
A3		236-698.5
A4		321-750*
J1		155-662
J2		239-747.5
J3		311-750*

Note: min. 1 mm Residual jaw stroke
min. 1 mm Clamping stroke

* Not larger than chuck OD

**Important for maintenance and safe operation,
to be ordered with the chuck**

Grease K67

Special grease for
manual and power chucks



Cartridge 14 Oz. (DIN 1284)
Grease content 500g
Id. No. 10731223




Can 1000 g
Id. No. 10731224

- High adhesion
- High resistance against coolant
- High load bearing capacity
- Low friction coefficient
- Avoids tribocorrosion

Grease gun

Grease gun (DIN 1283) for
cartridges 14 Oz. (DIN 1284)

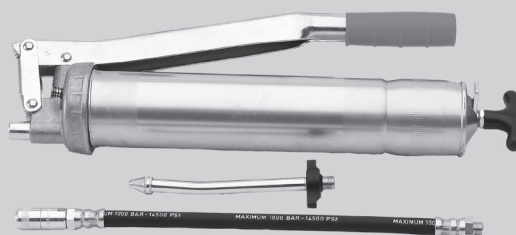


Lubrication set Id. No. 083726

- Supply range
- Grease gun
 - 1 Adapter flexible for high pressure grease nipple
 - 1 Adapter for cone grease nipple

MM e-motion

4 Mechatronic
individual jaw drives

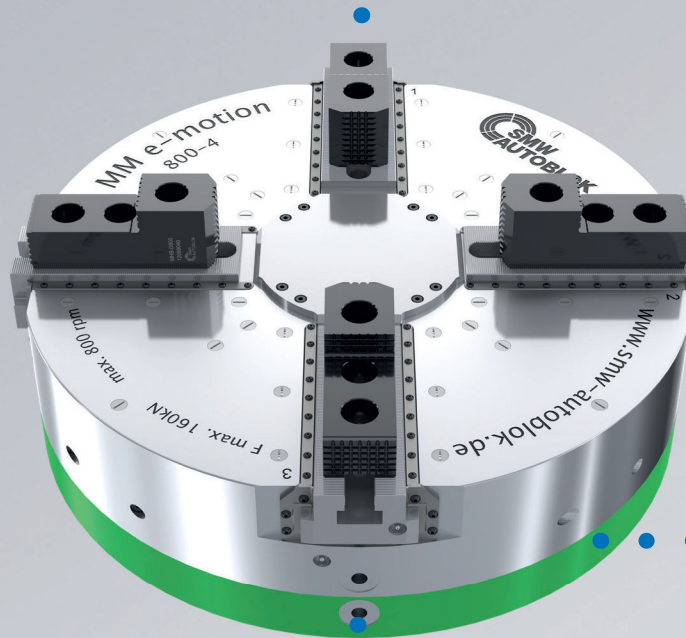


Standard
jaw interface

Cable connection
to remote coupler


Sealed and low
maintenance

Schematic of chuck and coupler system

Application on
vertical millturn center:

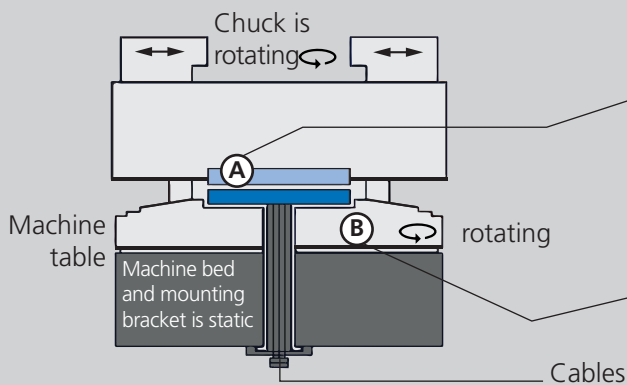


Application on
horizontal lathe:

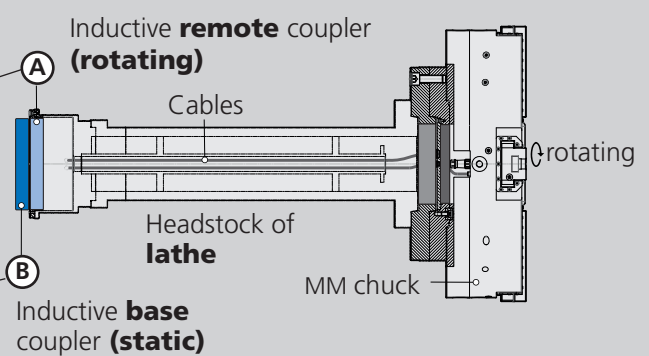

Function of the inductive coupler system

Inductive transmission of energy and data



→ Power transmission
↔ Transmission of signals
Airgap ≤ 2.5 mm

A



Remote
(rotating)
Id.-Nr. 208005





B



Base
(static)
Id.-Nr. 208004





Benefits to the user






- For deformation-sensitive and high-precision workpieces
- For a wide range of workpiece geometries
- Clamping repeatability < 5 µm

Sensitive clamping	High-Low clamping	Automatic adjustment	Clamping profiles
 • Changing of the gripping force without unclamping the part • Each jaw driven and controllable via e-motor	 • Clamping force increase or -reduction in tensioned state possible	 • MM800 can center the part automatically by using touch probe	 • Different wall thickness • Special geometrical forms • I.D. and O.D. clamping

Motion profiles


Clamping of different work piece geometries

Round	Square	Rectangular	Work pieces with different wall thicknesses
			

Irregular geometry			Easy deformed work pieces	
				

Plug & Play

Full solution MM e-motion

	+		+		+		+	
MM 800 e-motion Chuck		F280 Inductive coupler system (Base / Remote)		AC-MM control (2 pcs.)		PLC software module Input mask		HMI Operating screen

- Mechatronic single jaw drive
- Automatic correction function

Application/customer benefits


- Mechatronic single jaw drive
- Precise clamping force adjustment
- High-Low clamping possible
- Auto correction of the workpiece center
- Contact free transmission of power and signals via inductive coupler system
- e-sensing: inductive component detection / distance measurement (optional)
- Plug & Play

Technical features

- O.D. and I.D. clamping
- Programmable movement profiles of the jaws
- 2-fold safety system (STO and mechanical)
- Clamping repeatability < 5 µm
- **proofline®** = fully sealed - low maintenance

Standard equipment

4-jaw chuck

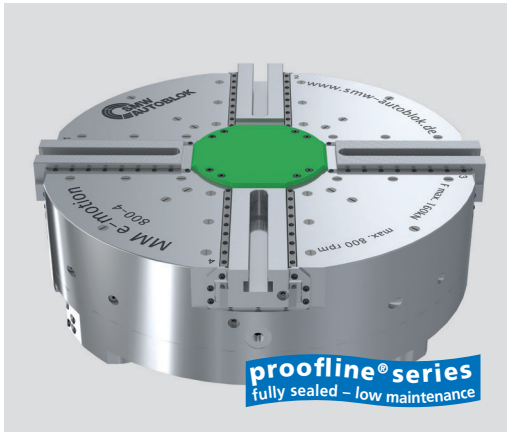


MM e-motion

- Each jaw is operated and controlled via an individual electro motor
- Inductive wireless transmission of power and sensor system
- Auto correction of the work piece center
- Permanent monitoring of grip force and clamping position also under rotation
- Fully sealed, low maintenance


MM e-motion LightWeight

- MM e-motion LightWeight (LW): weight optimized version
- Same functionality as MM e-motion
- Less chuck weight allows higher work piece weight
- Lower chuck profile allows more useable Z stroke
- Monoblock chuck body for highest rigidity


Overview of sizes




MM 500 e-motion




MM 630 e-motion LW

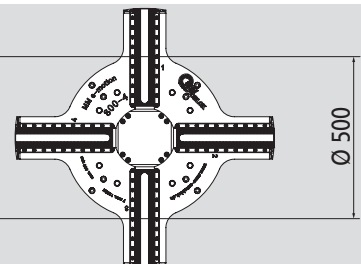


MM 800 e-motion LW




MM 800 e-motion




MM 1000 e-motion LW

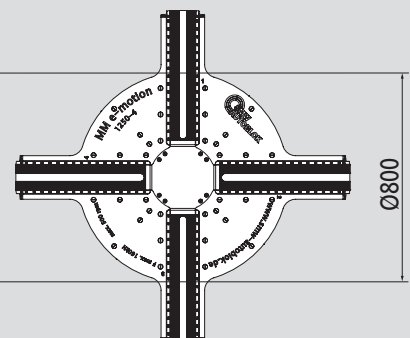

MM 1250 e-motion LW

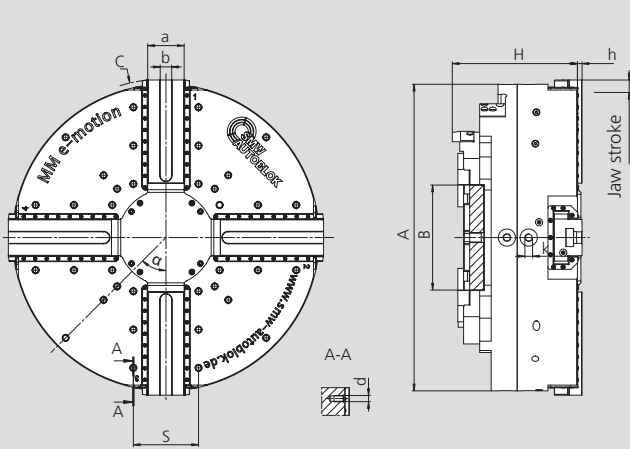

MM e-motion

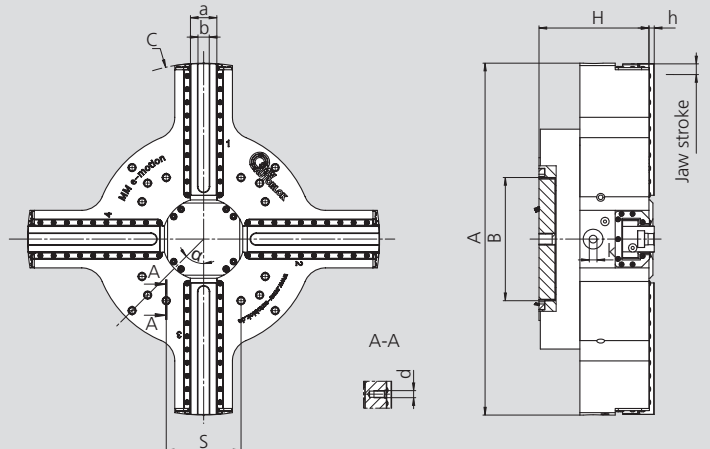


**MM e-motion
LightWeight (LW)**

Subject to technical changes.
For more detailed information please ask our customer service.

Type		MM 500 e-motion	MM 630 e-motion LW	MM 800 e-motion LW	MM 800 e-motion	MM 1000 e-motion LW	MM 1250 e-motion LW
Id. No.		055739			055270		
Chuck size	A mm	500	630	800	800	1000	1250
Inductive coupler diameter	B mm	280	280	280	280	280	280
Interference Ø	C mm	500	630	800	828	1028	1278
Chuck height	H mm	250	250	250	326.5	326.5	326.5
	S mm	180	180	170	170	170	170
	a mm	55	55	55	95	95	95
	b mm	21 H7	21 H7	21 H7	30 H7	30 H7	30 H7
	d mm	M16 (24x)	M16 (24x)	M16 (24x)	M16 (36x)	M16 (36x)	M16 (36x)
	h mm	12	12	12	12	12	12
	α deg.	45	45	45	45	45	45
Speed max.	min ⁻¹	1200	1000	800	800	650	500
Grip force max.	kN	100	100	100	160	160	160
Jaw stroke per jaw	mm	10	10	10	15	15	15
Moment of inertia	kg·m ²	10.7	12.5	19.1	62.5	79.8	110.6
Weight (without top jaws)	kg	282	310	360	770	850	950

- Mechatronic single jaw drive
- Automatic correction function
- Centrifugal force compensation

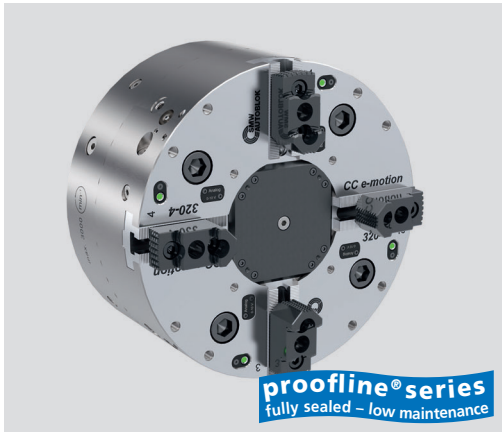

Application/customer benefits

- Mechatronic single jaw drive
- Precise clamping force adjustment
- High-Low clamping possible
- Auto correction of the workpiece center
- Contact free transmission of power and signals via inductive coupler system
- e-sensing: inductive component detection / distance measurement (optional)


Technical features


- Clamping force max. 100 kN
- Centrifugal force compensation
- Speed max. 3,000 rpm
- Clamping repeatability < 5 µm
- **proofline®** = fully sealed - low maintenance

Standard Equipment

4-jaw chuck
Mounting bolts

CC e-motion

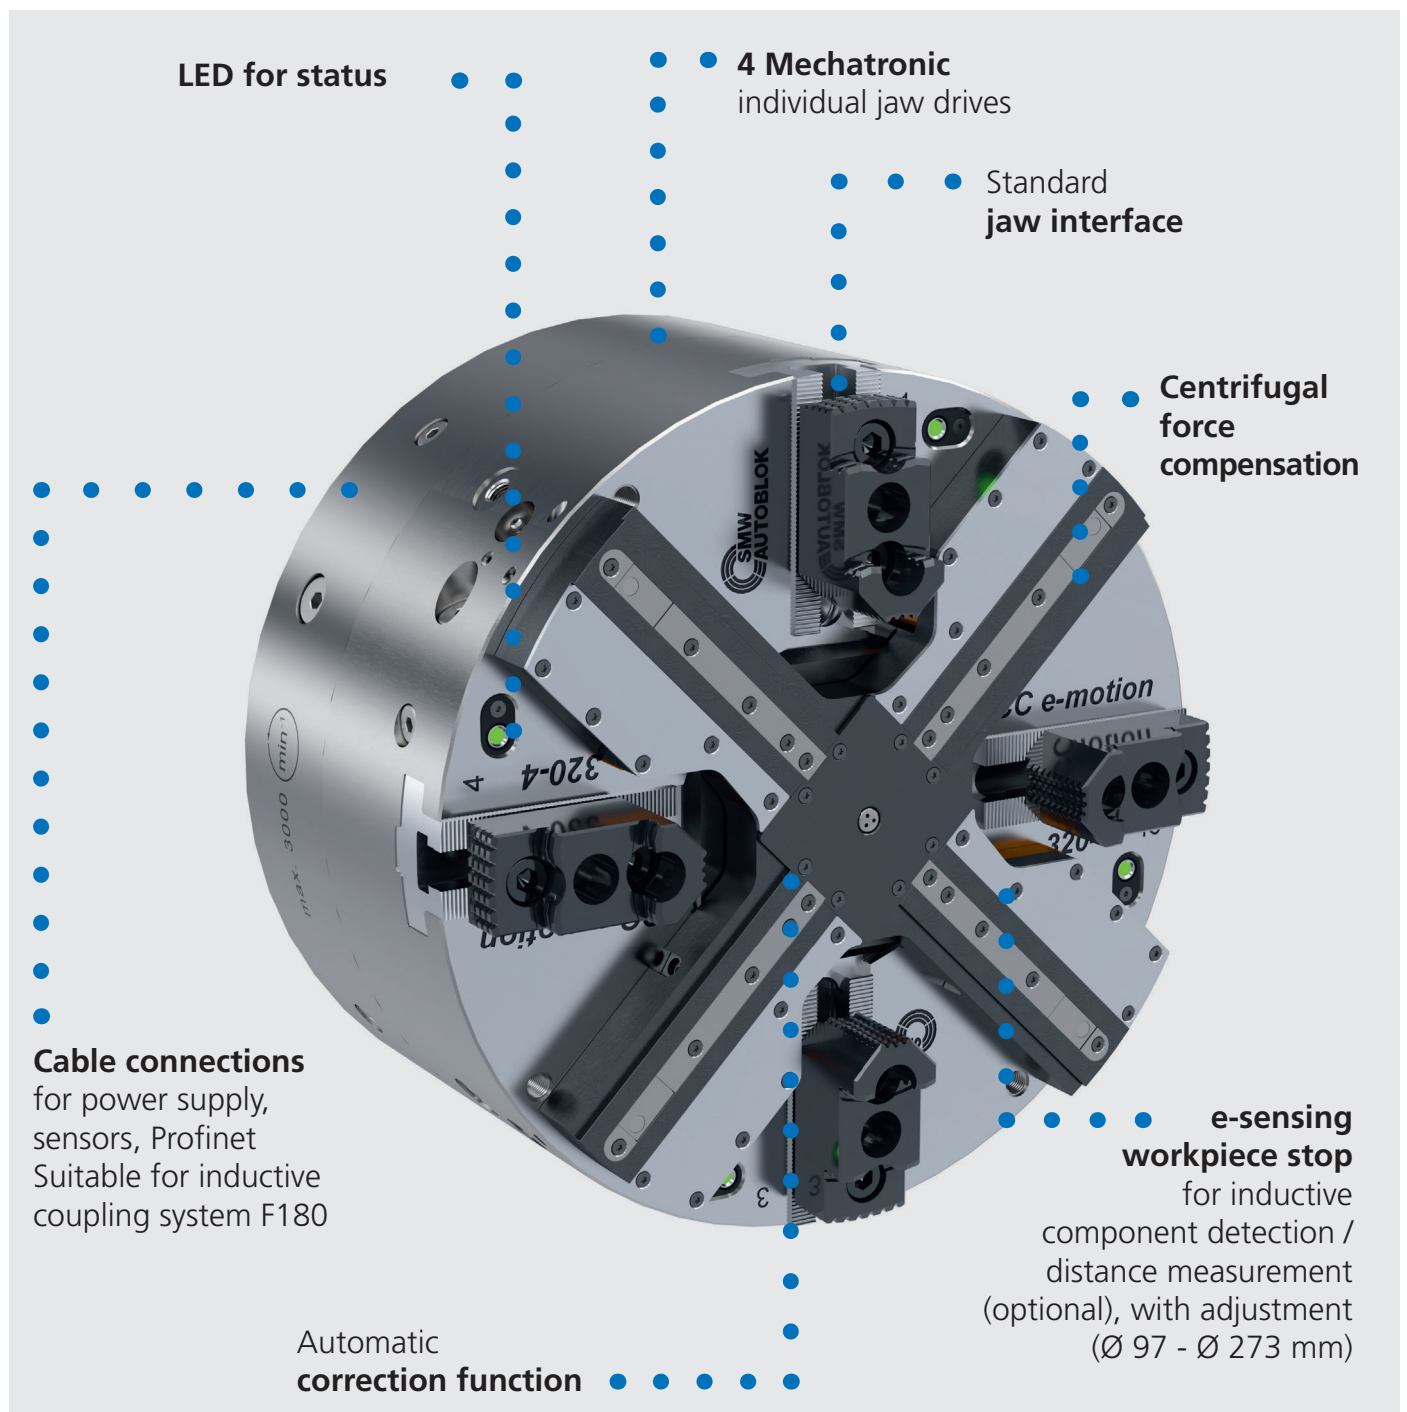


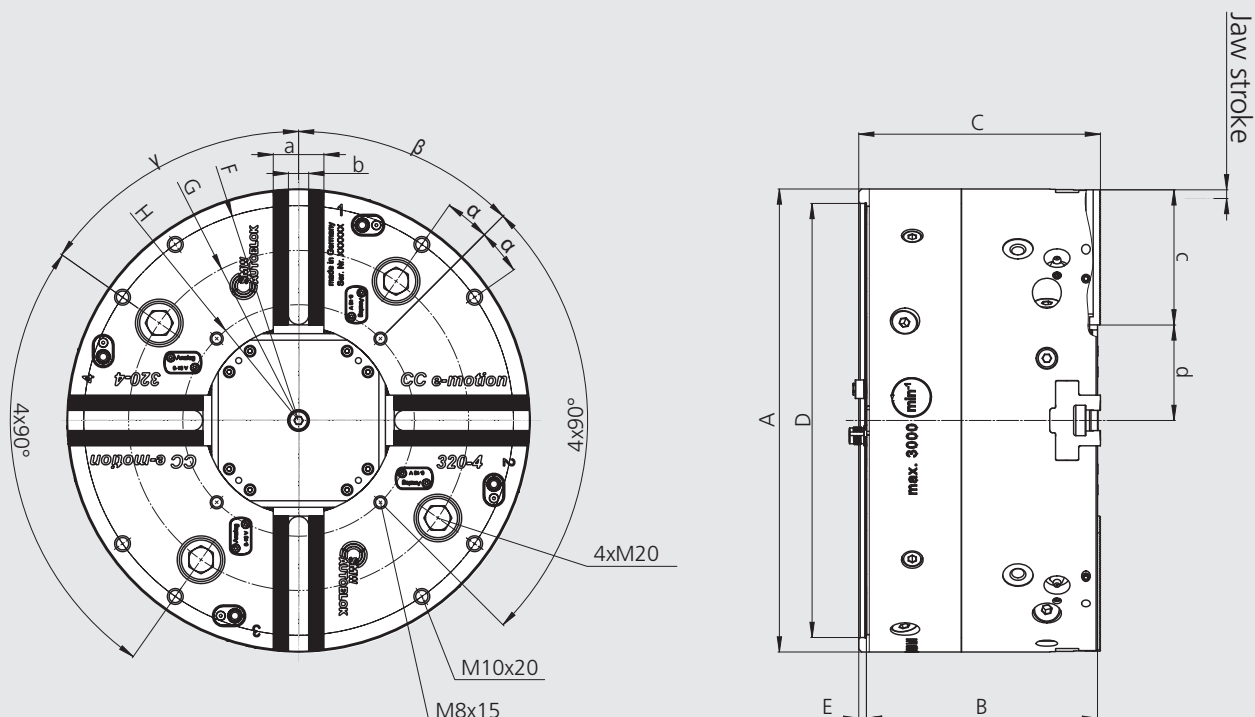


Subject to technical changes. For more detailed information please ask our customer service.

Type			CC e-motion 320-4
Outside diameter	A	mm	Ø 320
	B	mm	159.7
	C	mm	167
	D	mm	Ø 300
	E	mm	5.3
Bolt circle	F	mm	Ø 297
Bolt circle	G	mm	Ø 235
Bolt circle	H	mm	Ø 160
Jaw position	a	mm	35
Slot width	b	mm	14
	c	mm	~ 93
Min. / max.	d	mm	~ 61.5 / ~ 66
	-	mm	-
	α	Degree	10
	β	Degree	45
	γ	Degree	55
Serration		Zoll	1/16" x 90°
Max. speed		min ⁻¹	3000
Max. total clamping force		kN	100
Stroke per jaw		mm	4,5
Compensation stroke per jaw		µm	< 5


Mechanical installation on the machine

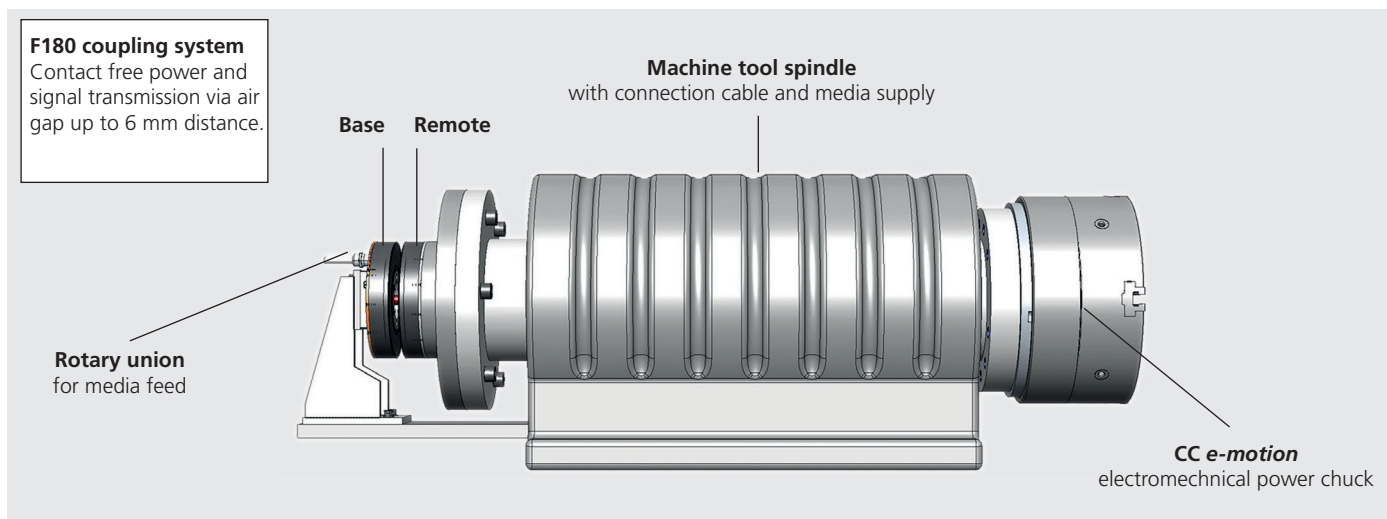

Application examples: Clamping of different workpiece geometries

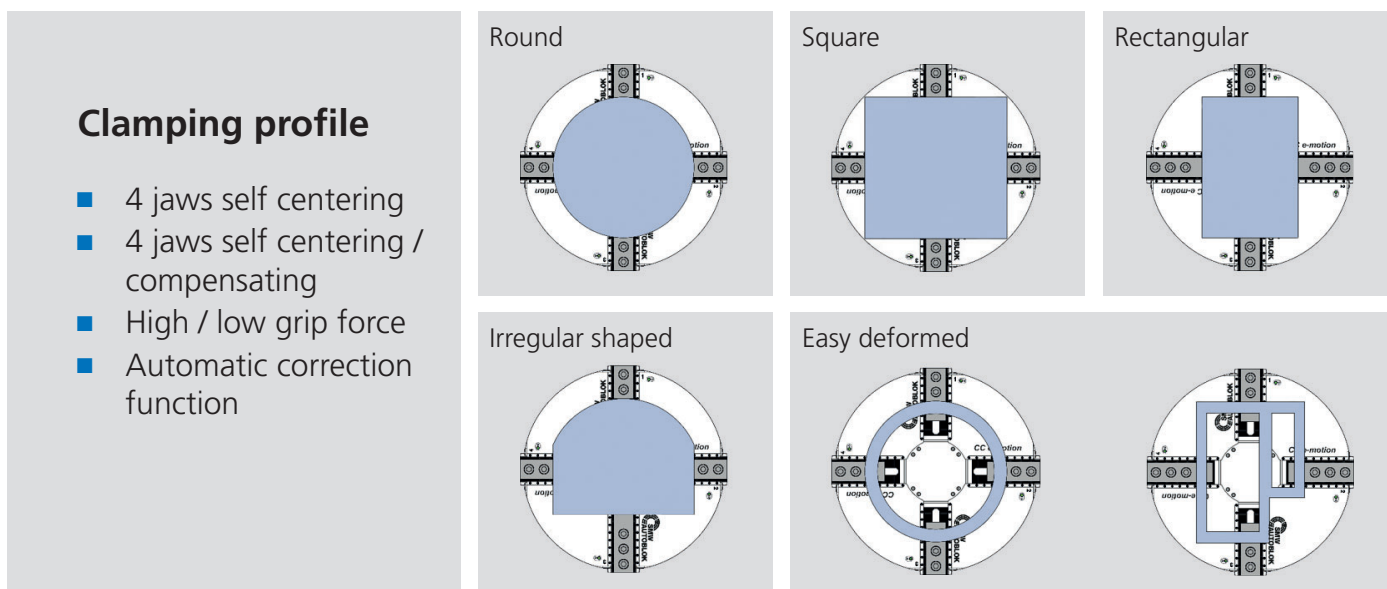

Plug & Play

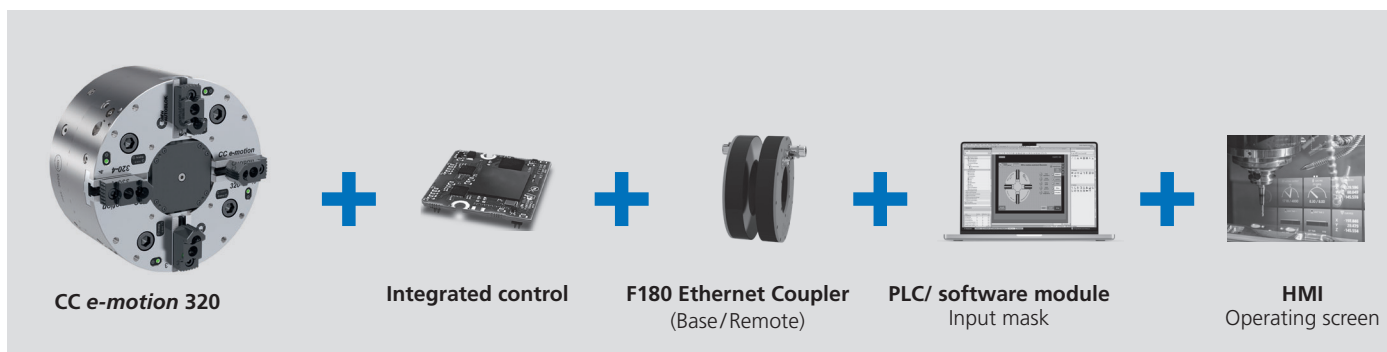


Technical data CC e-motion			Technical data F180 Ethernet		
Chuck diameter	mm	320	Power supply	V	24 / 48
Clamping force	kN	100	Transmission distance	mm	0 - 5
Max. speed	min ⁻¹	3000	Transmission standard		100 T-Base
Stroke per jaw	mm	4.5	Power transmission	V	24 / 48
Repeatability	µm	< 5	Power transmission	W	400

Notes

Inductive transmission of energy and signals

Contact free transmission of energy and signals via air gap

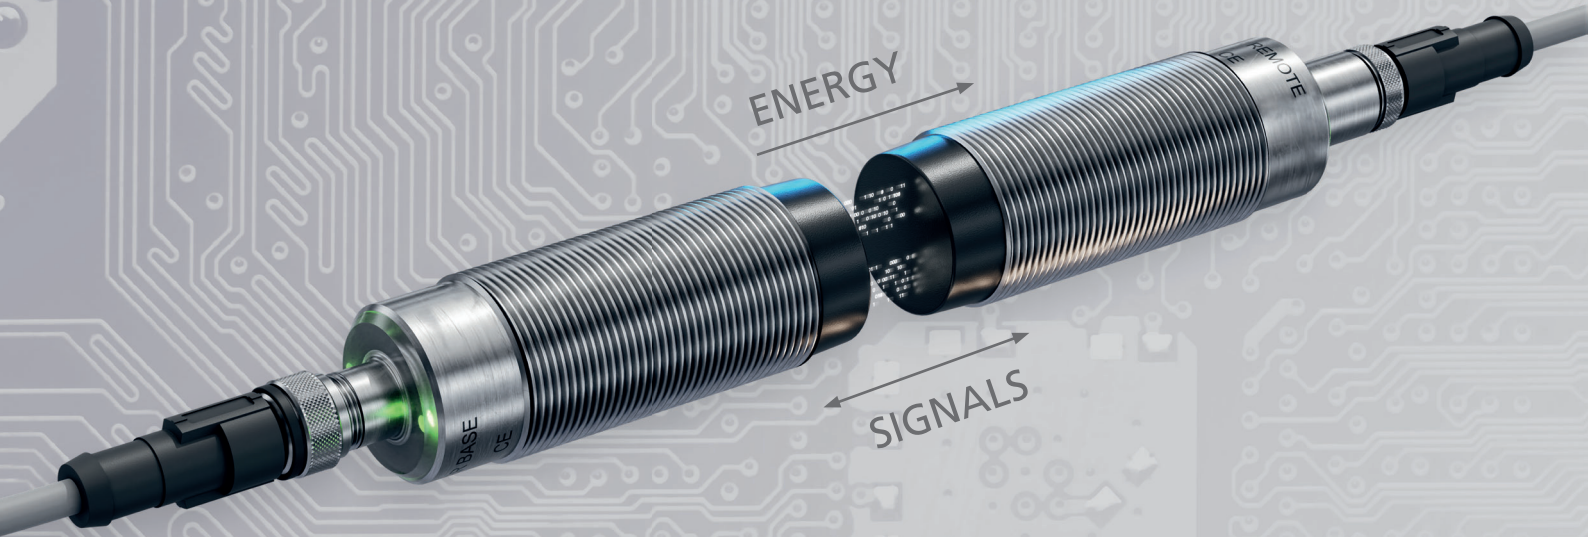

Benefits



- Flexible installation due to the large transmission distance
- Safe transmission even when the mobile coupler rotates
- Also suitable for high speeds
- Insensitive to vibrations
- No cable breakage
- Safe transmission of signals
- Completely free from wear and maintenance
- Can be used in rough conditions and also for clean room applications
- Protected according to IP67
- Safe transmission even through non-metallic obstacles
- Dynamic Pairing: Base unit (stationary) can communicate with different remote units (mobile)

Our technical possibilities and designs of energy and signal transmission

■ Inductive energy transmission

- Up to 1100 W



■ Inductive signal transmission

- Analog signals (0 - 10 V / 4 - 20 mA)
- Temperature signals (PT 100)
- Digital switching signals
- Field bus (CAN)
- IO-Link (COM1, COM2, COM3)
- Ethernet (compatible among others with PROFINET, Modbus, EtherNet/IP)

■ Hybrid systems

- Energy transmission via slip ring / contact pins
- Inductive signal transmission

Examples of geometric design for inductive energy and signal transmission

							
Transmission	Axial	Axial	Axial	Axial	Radial	Radial	Translational
Motion	Rotation / Linear	Rotation	Rotation	Rotation	Rotation	Rotation	Linear
Geometry	Cylinder (also cubic)	Disc	Ring	Ring segment / Ring	Segment / Ring	Ring / Ring	Cubic
Application examples	Palletizing, automation, mechanical engineering, tool monitoring, connector replacement	Mechanical engineering, mechatronics, collector ring replacement	Printing machines, robotics, collector ring replacement	Mechanical engineering, process technology	Packaging machines, centrifuges, process technology	Rotary indexing tables, packaging machines	Transport systems

Blue: Stationary unit (base)

Orange: Mobile unit (remote)

F100 Ethernet

Axial coupler

Inductive Coupling System

■ Contact free transmission of energy and signals



Application/customer benefits

- Contact free transmission of energy and signals between moving / rotating and stationary components
- Application examples: Robotic (END OF ARM TOOLING), Automation, Mechanical engineering
- Substitution of slip ring / connector
- Dynamic Pairing
- Wear and maintenance free
- Protective functions: temperature monitoring, foreign object detection, reverse polarity protection
- Multi-level LED with good visibility


Technical features

- Diameter 100 mm / Through hole 50 mm
- Operating voltage 24 V / max 6 A
- Transmission distance 0 - 4 mm
- Transmission of energy 24 V / 75 W
- Transmission of signals Ethernet 100 Base-T
- Transmission bandwidth: < 5 MBit/s
- Connections: M12 Ethernet (D-coded) / M12 Power (L-coded)
- Protection class: IP67

Standard equipment

Inductive coupler base or remote

Block diagram

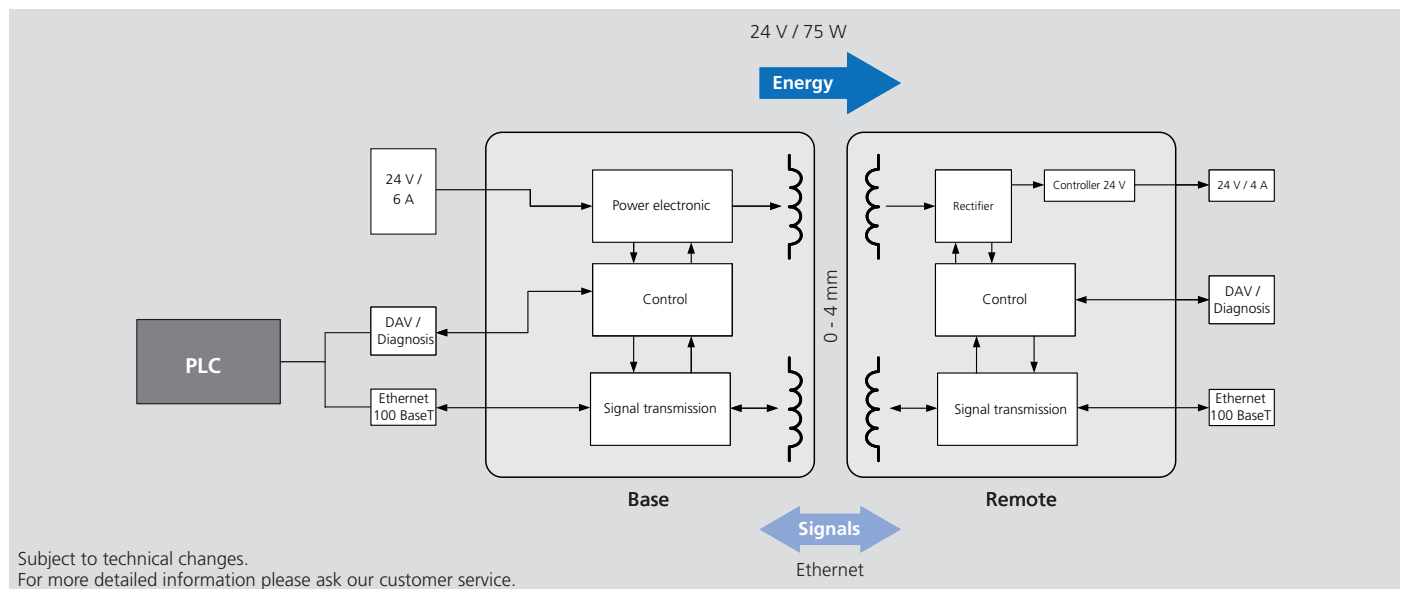


Inductive coupling system F100 Ethernet

Type	Base	Remote
Id. No.	0E011420	0E011421
Operating temperature (housing surface)	-20 °C ... +60 °C	
Storage temperature	-20 °C ... +60 °C	
Transmission distance	0 mm ... 4 mm	
Operating voltage	24 V	-
Output voltage	-	24 V (75 W)
Signal transmission Ethernet (bidirectional)	Ethernet 100 Base-T	
LED	2 LEDs 2-color	
Current consumption (Base)	6 A (24 V)	-
Overload protection / short circuit protection	✓	✓
Residual ripple	-	< 50 mV
Reverse polarity protection	✓	-
Data-Valid output	max. 100 mA	
Ready delay	< 1s	


- Stationary unit - Base
- Mobile unit - Remote

Axial coupler


Base / Remote:

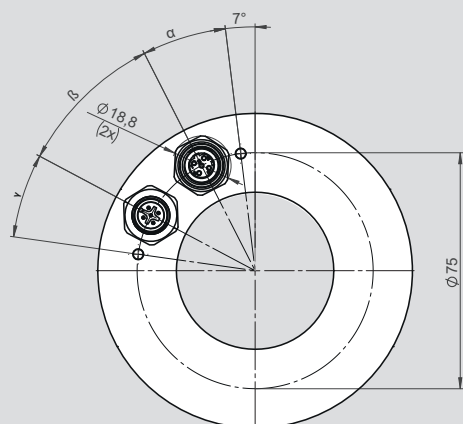


Base / Remote:

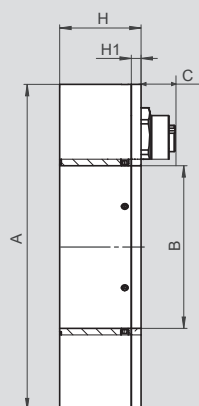

Base:



Remote:



Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system F100 Ethernet

Type		Base	Remote
Id. No.		0E011420	0E011421
A	mm	100	
B	mm	50	
C	mm	13	10
H	mm	25	
H1	mm	3	
α	degree	27	
β	degree	35	
γ	degree	20	
Housing material		Al, GFK	
Protection class		IP67	
Weight	kg	0.45	0.45

Function Base	
LED Power	
Color	Green / red
Function	Off » Unit not supplied with voltage (or undervoltage)
	On (green) » Voltage ok and mobile unit has been detected
	2 Hz green 50 / 50% » Operating temperature in critical range
	1 Hz green 25 / 75% » Voltage ok but no mobile unit detected
	1 Hz red / green » Incompatible mobile unit detected
Function	2 Hz red » Foreign element detected
	5 Hz red » Internal error
LED Signal transmission Ethernet	
Color	Yellow / red
Function	Off » No mobile unit detected
	On / yellow » Signal transmission ready
	1 Hz yellow » Data packets are being transmitted
	3 Hz yellow » 50% of the transmission bandwidth used (10 s)
	8 Hz red » Data packets were discarded (in the last 10 s)
	On / red » Error in data transmission (internal error)

Function Remote	
LED Power	
Color	Green / red
Function	Off » Unit not paired
	On (green) » Unit paired, voltage output ok
	Flashes 2 Hz red » Paired but short circuit
	Flashes 5 Hz red » Internal error
LED Signal transmission Ethernet	
Color	Yellow / red
Function	Off » No mobile unit detected
	On / yellow » Signal transmission ready
	1 Hz yellow » Data packets are being transmitted
	3 Hz yellow » 50% of the transmission bandwidth used (10 s)
	8 Hz red » Data packets were discarded (in the last 10 s)
	On / red » Error in data transmission (internal error)

F100-2IOL

Axial coupler

Inductive Coupling System

■ Contact free transmission of energy and signals

Application/customer benefits

- Contact free transmission of energy and signals between moving / rotating and stationary components
- Application examples: Robotic (End of Arm Tooling), Automation, Mechanical engineering
- Substitution of slip ring / connector
- Dynamic Pairing
- Wear and maintenance free
- Protective functions: temperature monitoring, foreign object detection, reverse polarity protection
- Status LED with good visibility


Technical features

- Diameter 100 mm / Through hole 50 mm
- Operating voltage 24 V / max. 6 A
- Transmission distance 0 - 4 mm
- Transmission of energy 24 V / 75 W
- Transmission of signals: 2x IO-Link (COM 1, COM 2, COM 3)
- Connections: Base: 2x M12 x 1 male 5-pin, Remote: 2x M12 x 1 female 5-pin
- Protection class: IP67

Standard equipment

Inductive coupler base or remote

Block diagram

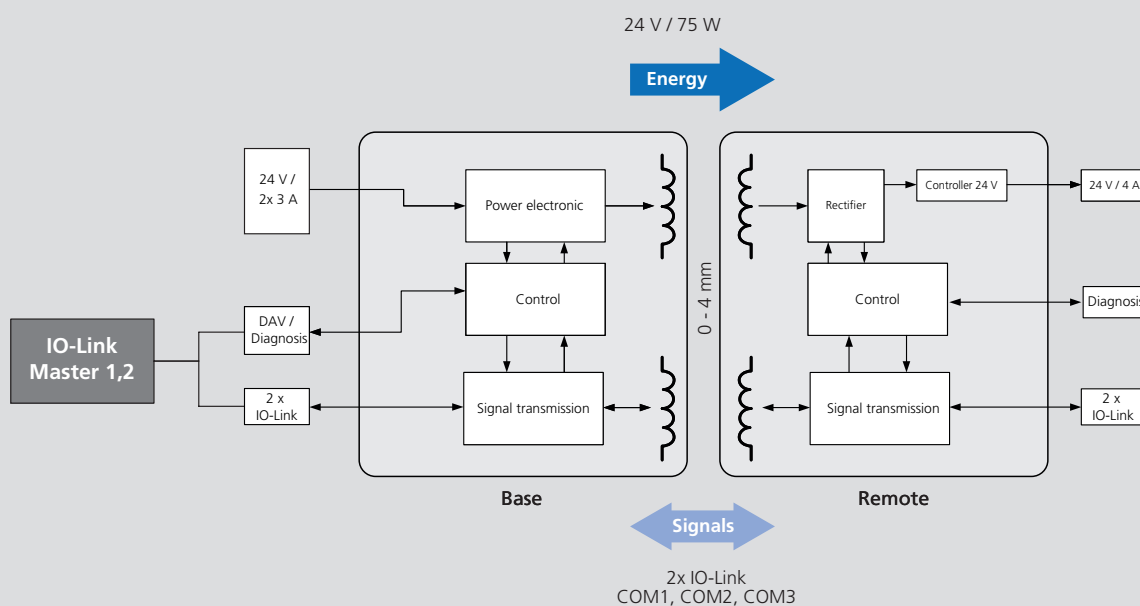

Subject to technical changes.
For more detailed information please ask our customer service.

IO-Link


Inductive coupling system F100-2IOL

Type	Base	Remote
Id. No.	0E012330	0E012331
Operating temperature (housing surface)	-20 °C ... +60 °C	
Storage temperature	-20 °C ... +60 °C	
Transmission distance	0 mm ... 4 mm	
Operating voltage	24 V	-
Output voltage	-	24 V (75 W)
Signal transmission	2x IO-Link (COM2, COM 2, COM 3)	
LED	2 LEDs 2-color	
Current consumption (Base)	6 A (24 V)	-
Overload protection / short circuit protection	✓	✓
Residual ripple	-	< 50 mV
Reverse polarity protection	✓	-
Data-Valid output	max. 100 mA	
Ready delay	< 1 s	


- Stationary unit - Base
- Mobile unit - Remote

Axial coupler



Base / Remote:

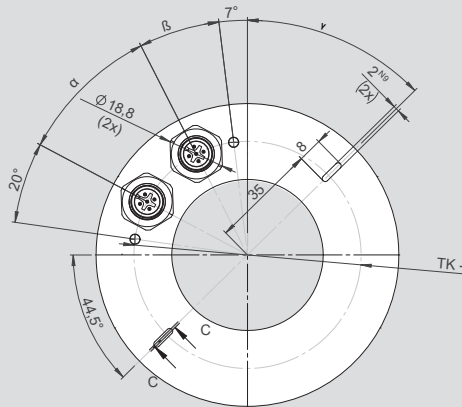

Base / Remote:


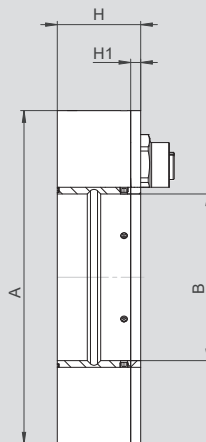


Base:



2x Male connector 5-pin
M12 x 1

Remote:



2x Female connector 5-pin
M12 x 1

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system F100-2IOL

Type		Base	Remote
Id. No.		0E012330	0E012331
A	mm	100	
B	mm	50	
C	mm	1	
H	mm	25	
H1	mm	3	
α	degree	35	
β	degree	20	
γ	degree	45.5	
Housing material		Al, GFK	
Protection class		IP67	
Weight	kg	0,224	0,237

Function LED IO-Link Base (X1, X2)

LED Power	
Color	Yellow / red
Function	Yellow » SIO mode active and SIO signal is high
	Flash yellow (1000 ms on, 100 ms off), » IO-Link communication active, power is on, Remote was detected
	Flashing 2 Hz yellow » no IO-Link device detected, power on, no Remote detected
	Flashing 2 Hz red » Short circuit on IO-Link PIN
	Flashing 5 Hz red » Overload voltage output Remote

Function LED IO-Link Remote (X1, X2)

LED Power	
Color	Yellow / red
Function	Yellow » SIO mode active and SIO signal is high
	Flash yellow (1000 ms on, 100 ms off), » IO-Link communication active, power is on, Base has been detected
	Flashing 2 Hz yellow » No IO-Link communication, power on, no Base detected
	Flashing 2 Hz red » Short circuit on IO-Link PIN
	Flashing 5 Hz red » Overload voltage output Base

PIN assignment	PIN	X1 Base	X2 Base	X1 Remote	X2 Remote
Supply voltage	1	24 V IN	24 V IN	24 V OUT	24 V OUT
Data-Valid	2	DAV 24 V	-	-	-
Ground	3	GND	GND	GND	GND
IO-Link Signal	4	IO-Link CQ	IO-Link CQ	IO-Link CQ	IO-Link CQ
-	5	-	-	-	-


F100-2IOL F100-ETH

Axial coupler

Inductive Coupling Systems

■ Ordering overview flange


Standard flange

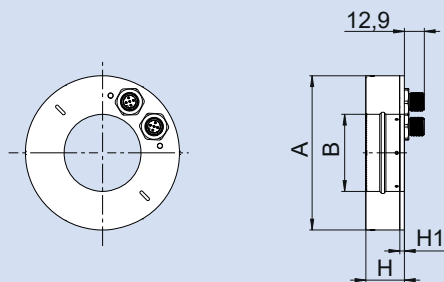

Type	IC-Base F100-2IOL D100/050	IC-Base F100-ETH D100/050
Id.-No.	0E012330 (/1)	0E011420 (/1)
A	100	
B	50	
B1	-	
B2	-	
H	25	
H1	3	
Weight	0.26 kg	

/1 = IC-Remote


Outer flange with feed-through

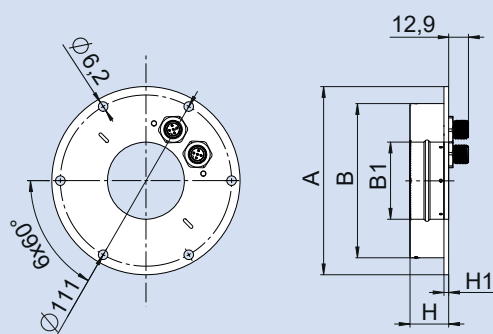

Type	IC-Base F100-2IOL D122/050	IC-Base F100-ETH D122/050
Id.-No.	0E012332 (/1)	0E012320 (/1)
A	122	
B	100	
B1	50	
B2	-	
H	25	
H1	3	
Weight	0.36 kg	

/1 = IC-Remote


Inner flange with feed-through

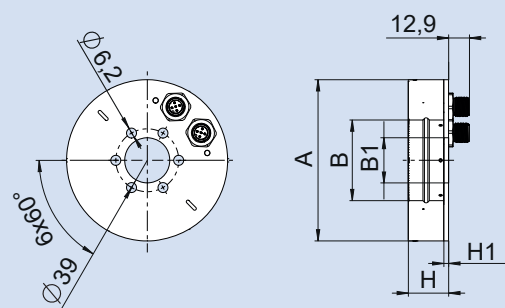

Type	IC-Base F100-2IOL D100/028	IC-Base F100-ETH D100/028
Id.-No.	0E012334 (/1)	0E012322 (/1)
A	100	
B	50	
B1	28	
B2	-	
H	25	
H1	3	
Weight	0.34 kg	

/1 = IC-Remote

Flangering with feed-through

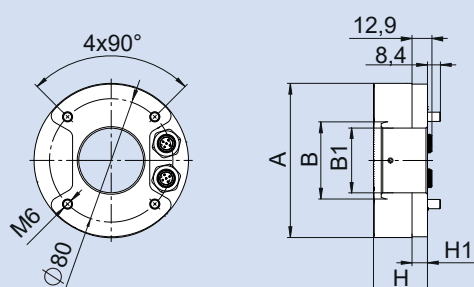

Type	IC-Base F100-2IOL D100/042	IC-Base F100-ETH D100/042
Id.-No.	0E012336 (/1)	0E012324 (/1)
A	100	
B	50	
B1	42	
B2	-	
H	25	
H1	10	
Weight	0.48 kg	

/1 = IC-Remote

FURTHER OPTIONS AVAILABLE ON REQUEST!

- Outer flange without feed-through
- Inner flange without feed-through
- Threaded sleeve with without feed-through


Notes

F180 Ethernet

Axial coupler

Inductive Coupling System

■ Contact free transmission of energy and signals

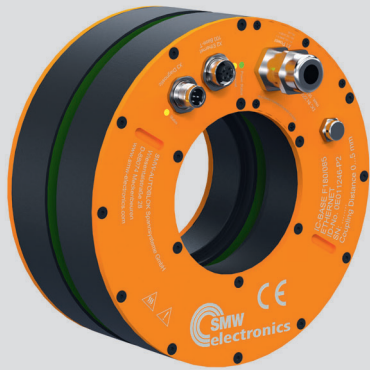

Application/customer benefits

- Contact free transmission of energy and signals between moving / rotating and stationary components
- Application examples: Packaging machines, special machines, automation, machine tools, printing machines, robot applications (EOAT)
- Substitution of slip ring / connector
- Dynamic Pairing
- Wear and maintenance free
- Protective functions: Temperature monitoring, foreign object detection
- Status LED with good visibility


Technical features

- Diameter: 180 mm / Through hole: 85 mm
- Operating voltage: 24 V or 48 V
- Transmission distance: 0 - 5 mm at 24 V or 0 - 3 mm at 48 V
- Energy transmission: 24 V / 240 W or 48 V / 400 W (adjustable)
- Signal transmission: Ethernet 100 Base-T
- Transmission bandwidth < 5 MBit/s
- Connections: M12 Ethernet (D-coded), M12 Diagnosis (A-coded), terminal block (Energy)
- Protection class: IP67

Block diagram

Standard equipment

Inductive coupler base oder remote

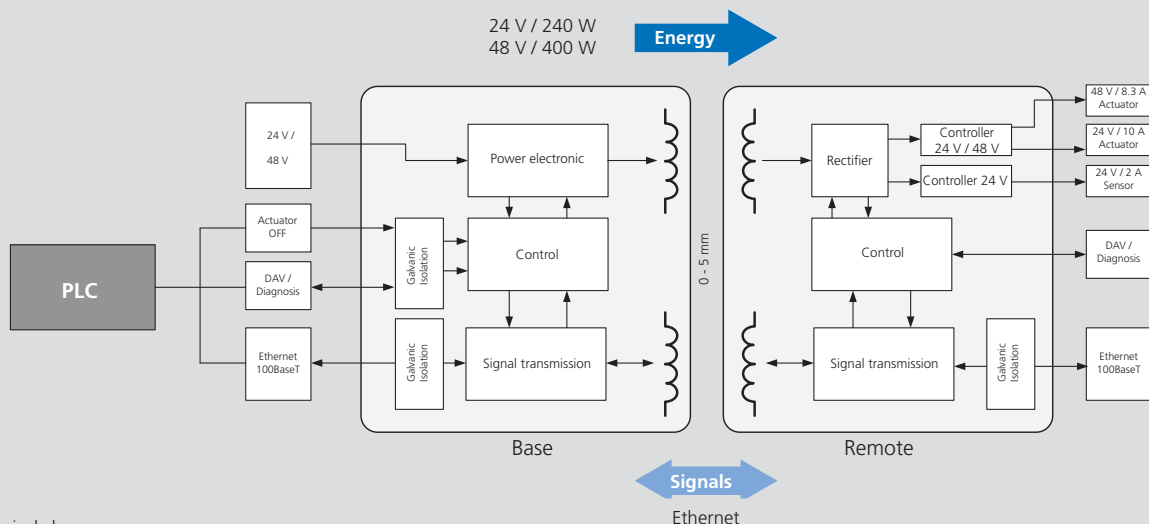


Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system F180 Ethernet


Type	Base	Remote
Id. No.	0E011246	0E011247
Operating temperature (body surface)	-20° C ... +60° C	
Stocking temperature	-20° C ... +60° C	
Transmission distance	0 mm ... 5 mm (24 V) 0 mm ... 3 mm (48 V)	
Operating voltage	24 V / 48 V	-
Output voltage (Actuator supply)*	-	24 V DC / 10 A 48 V DC / 8.3 A
Output voltage (Sensor supply)*	-	24 V DC / 4 A
Signal transmission	Ethernet 100 Base-T	
LED function display	3 LEDs 2-color	
Current consumption (base)	15 A (24 V) 12 A (48 V)	-
Overload protection / short-circuit protection	✓	✓
Reverse polarity protection	-	< 50 mV
Data valid output	max. 100 mA	-
Ready delay	< 5 s	

*max 400 W total


Base / Remote:

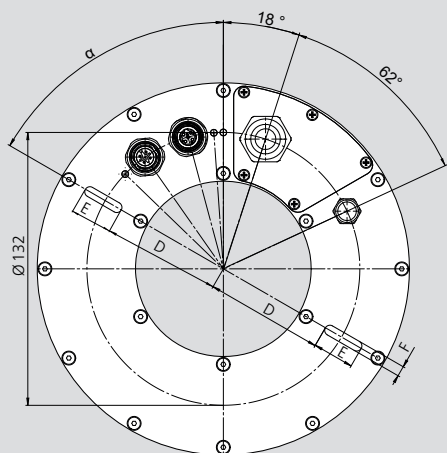


Base / Remote:

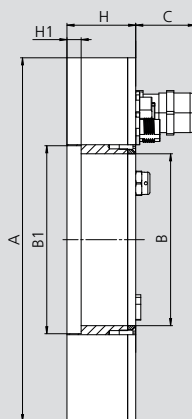

Base:



Remote:




Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system F180 Ethernet

Type		Base	Remote
Id. No.		0E011246	0E011247
A	mm	180	
B	mm	85	
B1	mm	93	
C	mm	29.5	
D	mm	57	
E	mm	20	
F	mm	5	
H	mm	34	
H1	mm	7	
α	degree	60	
Housing material		Al, GFK	
Protection class		IP67	
Weight	kg	1,172	1,275

Function Base		Function Remote	
LED Power		LED Actuator	
Color	Green/red	Color	Green/red
Function	Off » Unit not supplied with voltage (or undervoltage)	Function	Off » Unit not paired
	On (green) » Voltage ok and mobile unit has been detected		On (green) » Unit paired, voltage output actuator ok
	2 Hz green 50/ 50% » Operating temperature in critical range		Flashes 2 Hz red » Unit paired but short circuit on actuator
	1 Hz green 25/75% » Voltage ok but no mobile unit detected		Flashes 5 Hz red » Internal error
	1 Hz red/green » Incompatible mobile unit detected	LED Sensor supply	
	2 Hz red » Foreign element detected	Color	Green/red
5 Hz red » Internal error	Function	Off » Unit not paired	
On (green) » Unit paired, voltage output sensor (24 V) ok			
Flashes 2 Hz red » Unit paired but short circuit on sensor (24 V)			
LED Signal transmission Ethernet		Flashes 5 Hz red » Internal error	
Color	Yellow/red	LED Signal transmission	
Function	Off » No mobile unit detected	Color	Yellow/red
	On/yellow » Signal transmission ready	Function	Off » No mobile unit detected
	1 Hz yellow » Data packets are being transmitted		On/yellow » Signal transmission ready
	3 Hz yellow » 50% of the transmission bandwidth used (10 s)		Flashes 1 Hz yellow » Data packets are being transmitted
	8 Hz red » Data packets were discarded (in the last 10 s)		Flashes 3 Hz yellow » 50% of the transmission bandwidth used (10 s)
	On/red » Error in data transmission (internal error)		Flashes 8 Hz red » Data packets were discarded (in the last 10 s)
LED Energy transmission			On/red » Error in data transmission (internal error)
Color	Yellow/red		
Function	Off » No mobile unit detected		
	On (yellow) » Unit coupled, voltage output ok		
	1 Hz red/yellow » Short circuit at voltage output sensor		
	3 Hz red/yellow » Short circuit at voltage output actuator		
	3 Hz red » Short circuit at both voltage outputs		
	5 Hz red » Internal error		


Standard flange

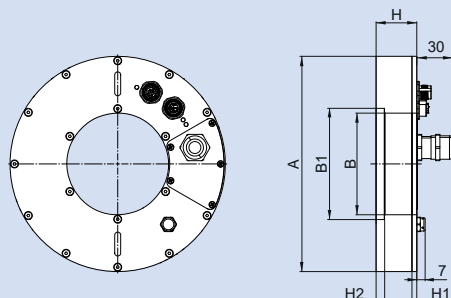

Type	IC-Base F180 Ethernet D180/085
Id.-No.	0E011246 (/1)
A	180
B	85
B1	93
B2	-
H	34
H1	4
H2	7
Weight	1.31 kg

/1 = IC-Remote


Outer flange with feed-through

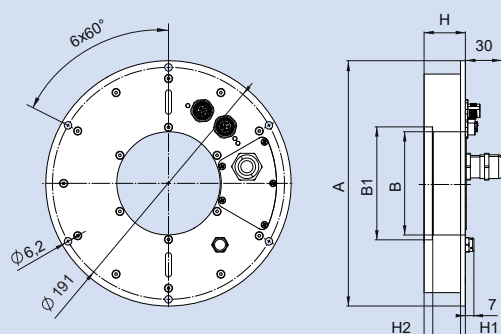

Type	IC-Base F180 Ethernet D202/085
Id.-No.	0E012340 (/1)
A	202
B	85
B1	93
B2	-
H	34
H1	4
H2	7
Weight	1.47 kg

/1 = IC-Remote


Inner flange with feed-through

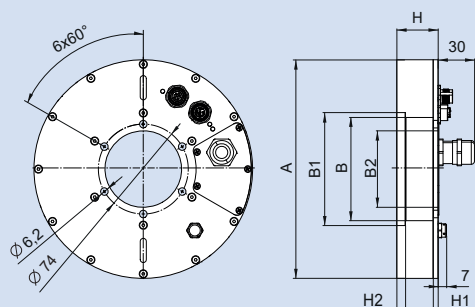

Type	IC-Base F180 Ethernet D180/063
Id.-No.	0E012342 (/1)
A	180
B	85
B1	93
B2	63
H	34
H1	4
H2	7
Weight	1.4 kg

/1 = IC-Remote

Flange ring with feed-through

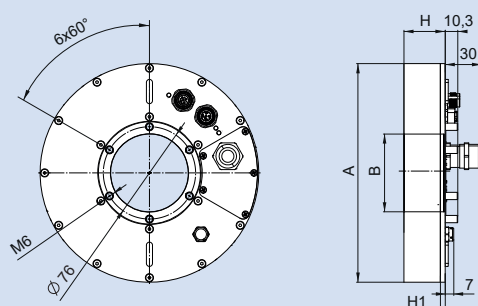


Type	IC-Base F180 Ethernet D180/064
Id.-No.	0E012344 (/1)
A	180
B	64
B1	-
B2	-
H	34
H1	4
H2	-
Weight	1.58 kg

/1 = IC-Remote

FURTHER OPTIONS AVAILBLE ON REQUEST!

- Outer flange without feed-through
- Inner flange without feed-through
- Threaded sleeve with feed-through

Notes

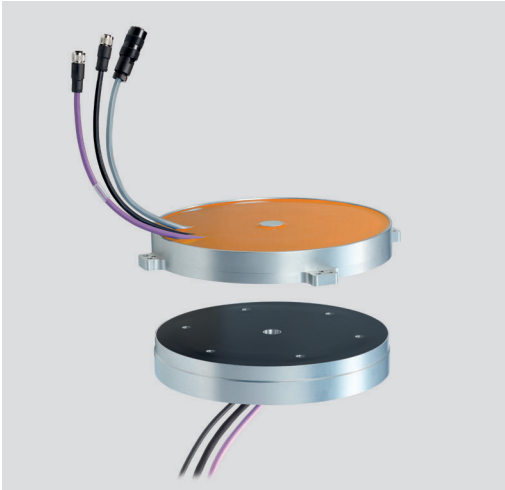

Application/customer benefits

- Contact free, safe transmission of energy and signals between moving / rotating and stationary components
- Connection from mechatronic clamping systems (MM / RT e-motion line) within machine tools, slip ring replacement
- Dynamic Pairing
- Free from wear and maintenance


Technical features

- Operating voltage 60 V $\pm$ 10%
- Energy transmission: 60 V / 1100 W (18 A) actuators, 24 V (2 A) sensors
- Signal transmission: Bus system 2x CAN BUS
- Signal transmission: Digital 2x 24 V switching signal remote to base
- Diameter 280 mm
- Transmission distance 0 - 3 mm
- Inverse-polarity protection (base), short-circuit proof (remote)
- Protection class: IP67

Standard equipment


Inductive coupler base or remote

Block diagram

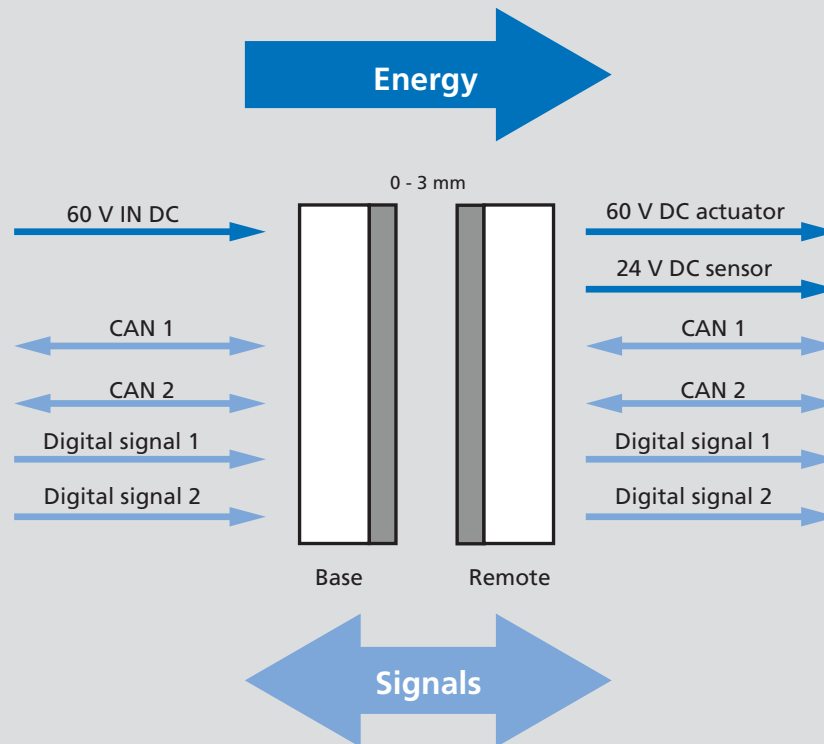


Subject to technical changes.
For more detailed information please ask our customer service.

Base:

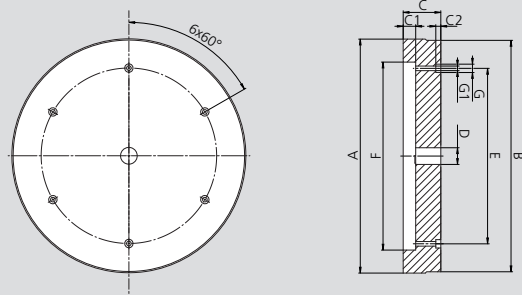

Remote:

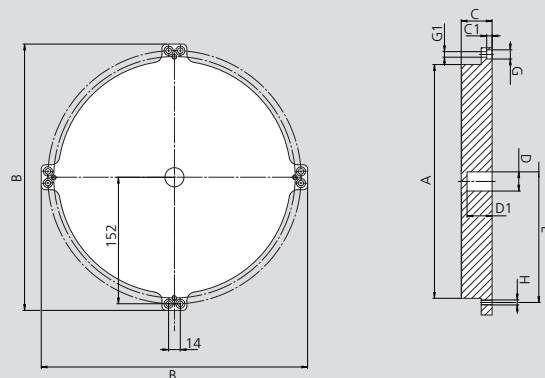

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system F280 CAN


Type		Base	Remote
Id. No.		208004	208005
A	mm	280	
B	mm	277	320
C	mm	45	37
C1	mm	15	6.4
C2	mm	6	-
D	mm	20	23
D1	mm	-	30
E	mm	210	290
F	mm	225	-
G	mm	10	11
G1	mm	5.5	6.6
H	mm	-	M6
Housing material		Al, PA12	
Protection class		IP67	
Operating temperature		-10° C ... +50° C	
Storage temperature		-25° C ... +70° C	
Transmission distance		0 mm ... 3 mm	
Weight	kg	4.54	-
Operating voltage		60 V DC	-
Output voltage actuator		-	60 V DC
Output voltage sensor		-	24 V DC
Power consumption (Base)		< 25 A	-
Power output (Remote)		-	Max. 18 A Aktuator (60 V) / max. 2 A Sensor (24 V)
Overload protection / short circuit protection			✓
Residual ripple		-	< 5 V
Reverse polarity protection		✓	-
Ready delay		< 800 ms	

F100/66-IOL

Axial coupler

Inductive Coupling System

- Contact free transmission of energy and signals
- Ideal for pallet change applications



Application/customer benefits

- Contact free transmission of energy and signals between moving / rotating and stationary components
- Application examples: Supply of sensors and valves in pallet change applications
- Dynamic Pairing
- Wear and maintenance free
- Protective functions: Temperature monitoring, foreign object detection, reverse polarity protection


Technical features

- Mounting 4 x M5 x 20, pitch circle Ø 84 mm
- Axial installation sealing
- Operating voltage 24 V (18 ... 30 V)
- Transmission distance 0 - 5 mm
- Transmission of energy: 24 V / 22 W
- Transmission of signals: IO-Link (COM1, COM2, COM3)
- Connection: Base male connector M12 x 1 (5-pin), remote female connector M12 x 1 (5-pin)
- Protection class: IP67

Standard equipment

Inductive coupler base or remote

Block diagram

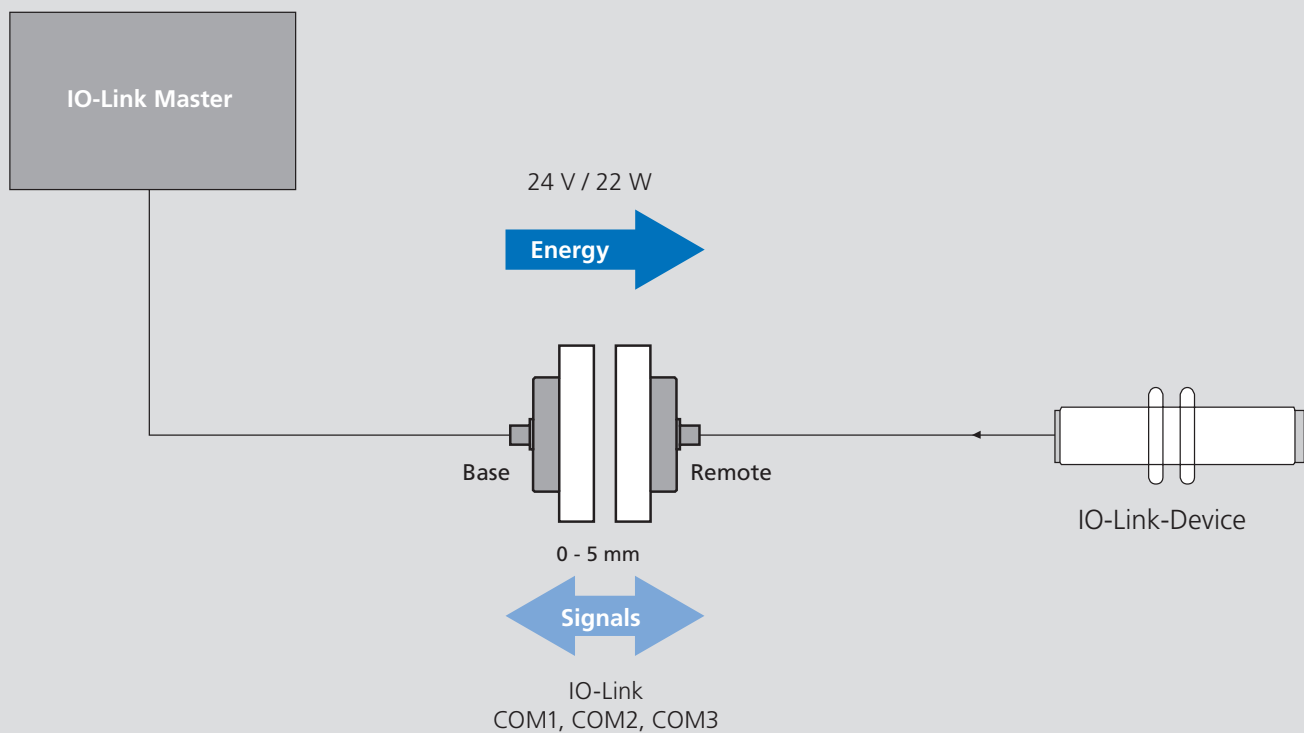

Subject to technical changes.
For more detailed information please ask our customer service.







Inductive Coupling System

F100/66-IOL


- Contact free transmission of energy and signals
- Ideal for pallet change applications

Axial coupler

Base/ Remote:

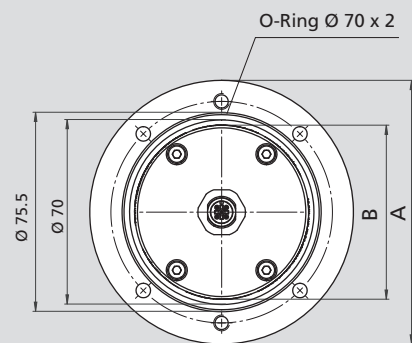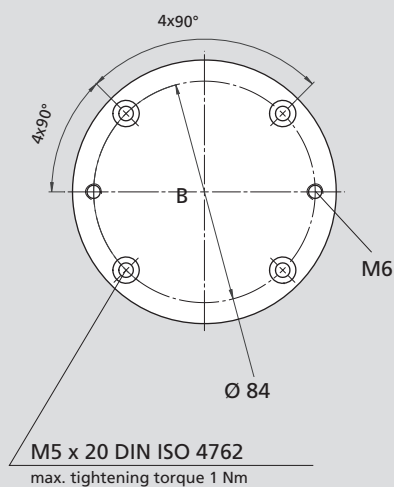

Male connector 5-pin
M12 x 1



Female connector 5-pin
M12 x 1

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system F100/66-IOL

Type		Base	Remote
Id. No.		0E012280	0E012290
A	mm	100 - 0.1	
B	mm	66 - 0.1	
C	mm	20 - 0.1	
D	mm	15	
E	mm	12	
F	mm	M12 x 1 / Male	M12 x 1 / Female
Housing material		PA 12 C, AL	
Protection class		IP67	
Operating temperature		-20° C ... +50° C	
Storage temperature		-20° C ... +80° C	
Transmission distance		0 - 5 mm	
Weight	kg	-	-
Operating voltage		24 V (18 ... 30 V)	-
Output voltage		-	24 V ± 10% DC
Power consumption (Base)		1600 mA	-
Power output (Remote)		-	920 mA
Overload protection / short circuit protection		✓	✓
Residual ripple		-	< 200 mV
Reverse polarity protection		✓	-
Temperature monitoring		✓	✓
Data-Valid Output		150 mA	-
Ready delay		< 600 ms	
PIN assignment		Signal Base	Signal Remote
Supply voltage	1	24 V IN	24 V OUT
Digital signal	2	0/24 V OUT	0/24 V IN
Ground	3	GND	GND
IO-Link Signal	4	IO-Link CQ	IO-Link CQ
Data-Valid	5	DAV 24 V	-

M12-2

Axial coupler

Inductive Coupling System

■ Contact free transmission of energy and signals



Application/customer benefits

- Contact free transmission of energy and signals between moving / rotating and stationary components
- Application examples: Supply of mobile sensors, supply and monitoring of remote systems, monitoring of door contacting
- Dynamic Pairing
- Wear and maintenance free
- Operating display


Technical features

- Mounting M12 x 1
- Operating voltage 24 V $\pm$ 10%
- Transmission distance 0 - 2.5 mm
- Transmission of energy: 24 V / 1 W (35 mA)
- Transmission of signals: 2 digital signals (PNP)
- Inverse-polarity protection (base), short-circuit proof (remote)
- Connections: Base cable 300 mm with male connector M12 x 1 (5-pin), Remote cable 300 mm with female connector M12 x 1 (5-pin)
- Protection class: IP67

Block diagram

Standard equipment

Inductive coupler base or remote


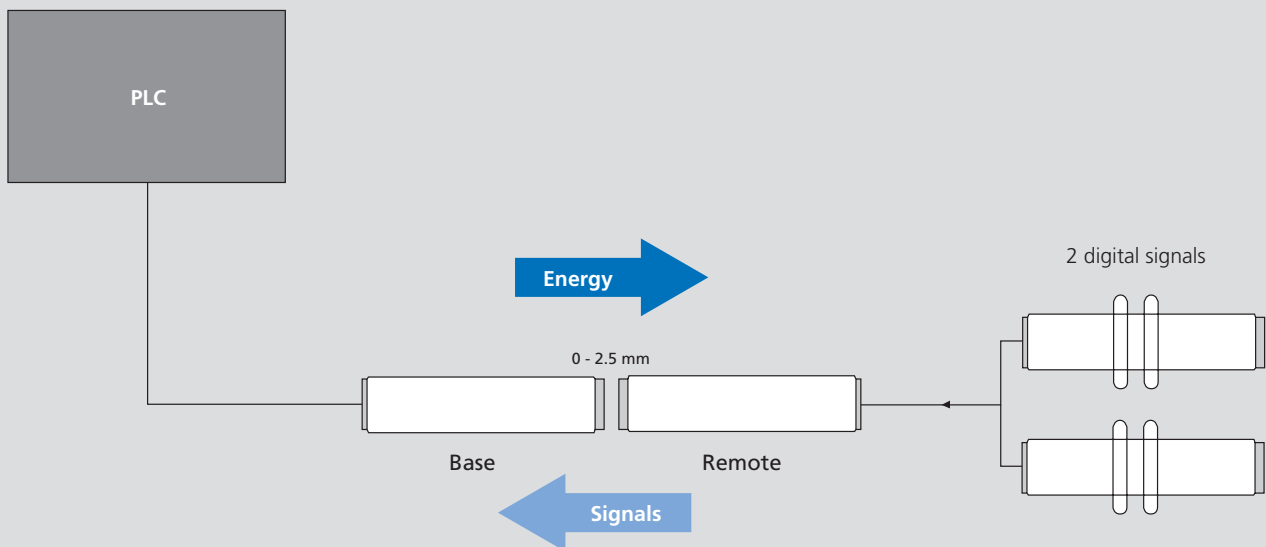


Subject to technical changes.
For more detailed information please ask our customer service.

- Stationary Unit - Base
- Mobile Unit - Remote



Axial coupler

Base:

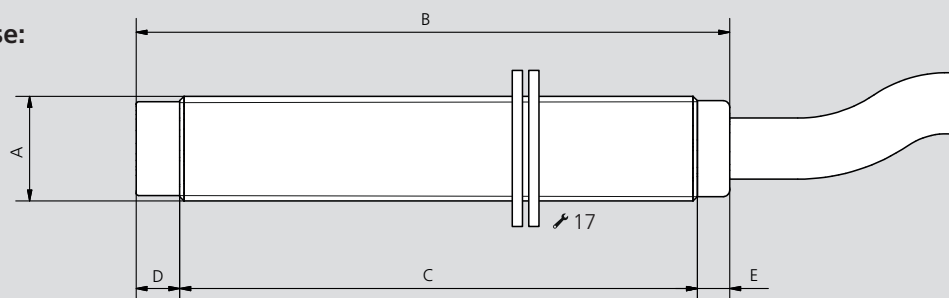

Male connector 5-pin
M12 x 1

Remote:

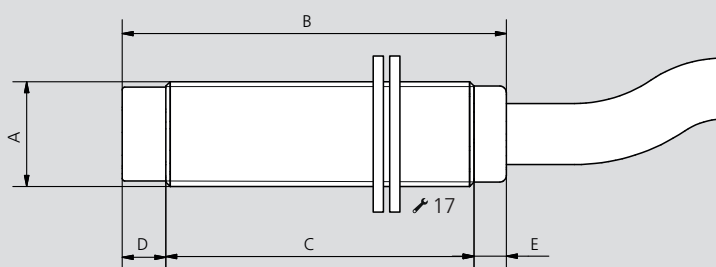

Female connector 5-pin
M12 x 1

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system M12-2

Type		Base	Remote
Id. No.		0E010956	0E010957
A	mm	M12 x 1	
B	mm	68	44
C	mm	59.3	35.3
D	mm	5	
E	mm	3.7	
Cable length	mm	300	
Housing material		CuZn, PA66, PC GF 30%	
Protection class		IP67	
Operating temperature		-10° C ... +55° C	
Storage temperature		-25° C ... +70° C	
Transmission distance		0 mm ... 2.5 mm	
Weight	kg	0.075	0.075
Operating voltage		24 V ± 10% DC	-
Output voltage		-	24 V ± 10% DC
Power consumption (Base)		< 400 mA	-
Power output (Remote)		-	< 50 mA
Overload protection / short circuit protection		✓	✓
Residual ripple		-	< 200 mV
Reverse polarity protection		✓	-
Data-Valid Output		max. 100 mA	-
Ready delay		100 ms	
PIN assignment		Signal Base	Signal Remote
Supply voltage	1	+24 V IN	+24 V OUT
Digital signal 1	2	0 / 24 V OUT	0 / 24 V IN
Ground	3	GND	GND
Digital signal 2	4	0 / 24 V OUT	0 / 24 V IN
Data-Valid	5	DAV 24 V	-



Application/customer benefits

- Contact free transmission of energy and signals between moving / rotating and stationary components
- Application examples: Automation, piloting of magnet valves, reading of status signals, online monitoring of sensor signals in the remote area, contacting at rotary tables, plug replacement for SPS signals
- Dynamic Pairing
- Wear and maintenance free
- Operating display


Technical features

- Mounting M18 x 1
- Operating voltage 22 V ... 30 V $\pm$ 10%
- Transmission distance 0 - 3 mm
- Transmission of energy: 12 V / 1.2 W (100 mA)
- Transmission of signals: 4 digital signals (PNP)
- Inverse-polarity protection (base), short-circuit proof (remote)
- Connection: Base cable 2000 mm open ended, remote cable 2000 mm open ended
- Protection class: IP67

Block diagram

Standard equipment

Inductive coupler base or remote

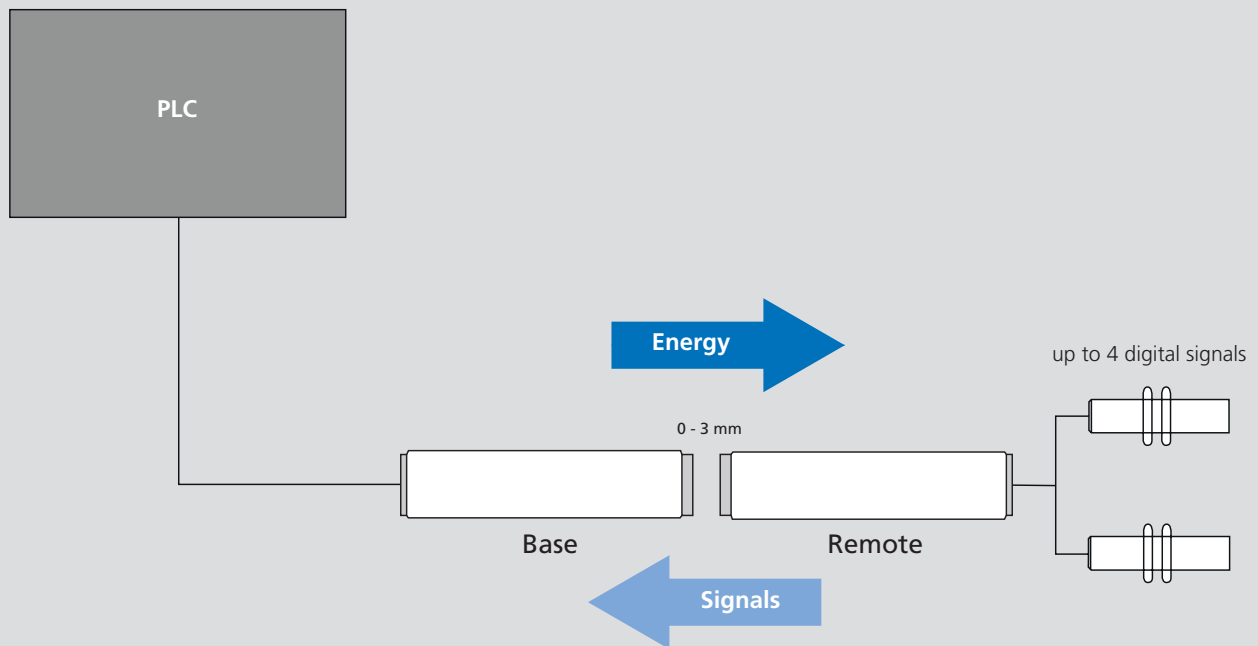


Subject to technical changes.
For more detailed information please ask our customer service.


- Stationary Unit - Base
- Mobile Unit - Remote

Axial coupler

Base:

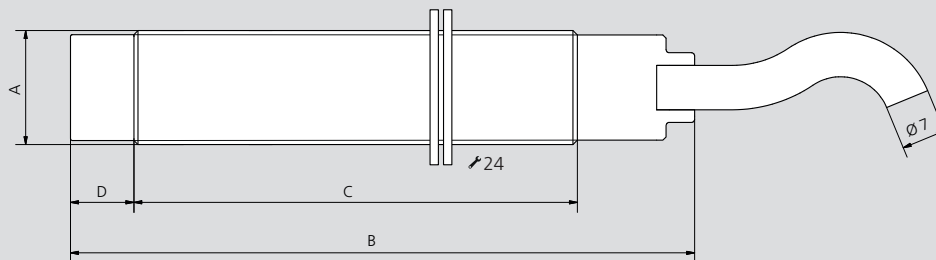

Remote:

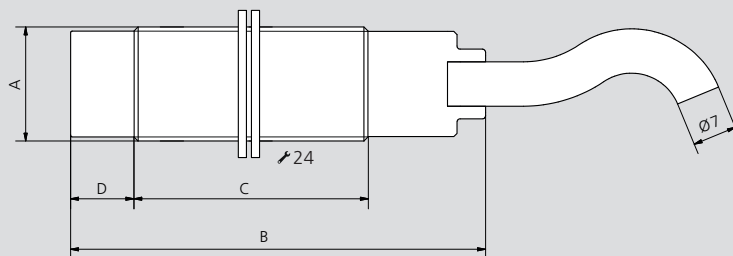


Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system M18-4

Type		Base		Remote	
Id. No.		0E010954		0E010955	
A	mm	M18 x 1			
B	mm	98.5		65.5	
C	mm	70		37	
D	mm	10			
Cable length	mm	~ 2000			
Housing material		CuZn, PA66, PC GF 30%			
Protection class		IP67			
Operating temperature		0° C ... +50° C			
Storage temperature		-10° C ... +70° C			
Transmission distance		0 mm ... 3 mm			
Weight	kg	0.34		0.27	
Operating voltage		22 V ... 30 V		-	
Output voltage		-		12 V ± 10% DC	
Power consumption (Base)		≤ 500 mA		-	
Power output (Remote)		-		< 100 mA	
Overload protection / short circuit protection		✓		✓	
Residual ripple		-		< 200 mV	
Reverse polarity protection		✓		-	
Data-Valid Output		max. 100 mA		-	
Ready delay		< 80 ms			
PIN assignment (*Legend)		PIN	Signal Base		Signal Remote
Connection line WH (Base) / WH (Remote)		1	Supply voltage 24 V IN		Supply voltage VCC 12 V OUT
Connection line BU (Base) / BU (Remote)		2	GND 0 V		GND
Connection line GY (Base) / BN (Remote)		3	Data-Valid 0 / 24 V OUT		Digital signal 1: 0 / 24 V IN
Connection line BN (Base) / PK (Remote)		4	Digital signal 1: 0 / 24 V OUT		Digital signal 2: 0 / 24 V IN
Connection line PK (Base) / YE (Remote)		5	Digital signal 2: 0 / 24 V OUT		Digital signal 3: 0 / 24 V IN
Connection line YE (Base) / GN (Remote)		6	Digital signal 3: 0 / 24 V OUT		Digital signal 4: 0 / 24 V IN
Connection line GN (Base) / GY (Remote)		7	Digital signal 4: 0 / 24 V OUT		-

(*Legend) WH = White; BU = Blue; GY = Grey; BN = Brown; PK = PINK; YE = YELLOW; GN = Green;



Application/customer benefits

- Contact free, safe transmission of energy and signals between moving / rotating and stationary components
- Application examples: Supply of sensors, Supply and monitoring of remote systems
- Dynamic Pairing
- Wear and maintenance free
- Protective function: Temperature monitoring, foreign object detection, reverse polarity protection
- Multi-level LED with good visibility


Technical features

- Mounting: M30 x 1.5
- Operating voltage: 24 V (18 ... 30 V)
- Transmission distance: 0 - 10 mm
- Transmission of energy: 24 V / 12 W (500 mA) with a distance of 0 - 7 mm
- Transmission of signals: IO-Link (COM1, COM2, COM3), 1 digital signal
- Connection: Base male connector M12 x 1 (5-pin), remote female connector M12 x 1 (5-pin)
- Protection class: IP67

Standard equipment

Inductive coupler Base or Remote

Block diagram

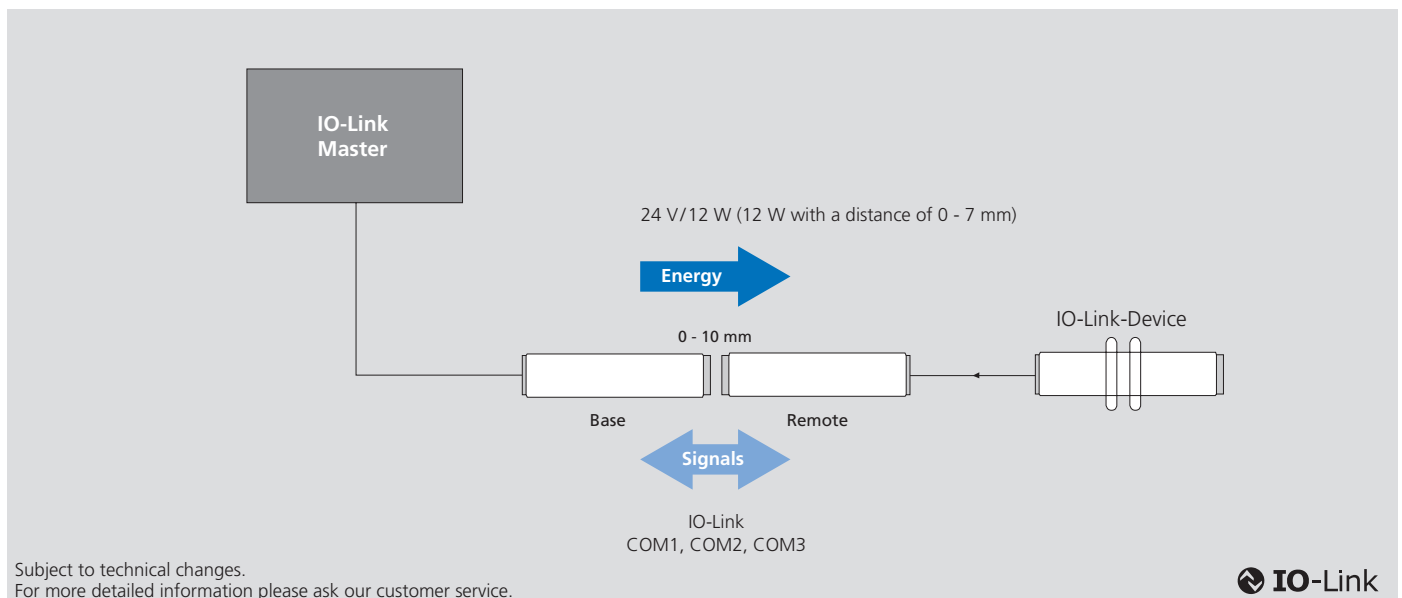

LED Function display Base

LED Power	
Color	Green/red
Function	Off green » Unit not supplied with voltage
	Flashes green for 3 s/0.5 s » Device supplied with voltage 18 V < U < 30 V
	On green » Voltage ok and mobile unit detected
	Flashes 2 Hz red/green » Alternately U in > 30 V, remote overload
	Flashes 2 Hz red » Base overtemperature
LED Signal 1	
Color	Yellow/red
Function	Off yellow » No mobile unit detected
	On yellow » Mobile unit detected, no IOL mode
	Flashes 900 ms/100 ms yellow » IOL mode (COM1, COM2, COM3)
	2 Hz red » Signal overload (C/Q, DO, DAV)
LED Signal 2	
Color	Yellow
Function	Off yellow » Digital channel not switched (low)
	On yellow » Digital channel switched (high)
Data Valid Output	
Function	ON » Handset has been recognized and there is no error
	OFF » The data at the output is not valid because the mobile unit is not recognized, overload at the output, mobil unit power supply overloaded.


LED Function display Remote

LED Coupling	
Color	Green/red
Function	Off green » Device is not coupled
	On green » Device is coupled and 24 V out ok
	2 Hz red/green » Overload at 24 V out or insufficient power supply
	2 Hz red » Overtemperature
	2 Hz rot » Overload cut-off at 24 V out
LED IO-Link	
Color	Yellow/red
Function	Off yellow » No stationary part detected
	On yellow » Stationary part detected, no IOL mode
	Flashes 900 ms/100 ms yellow » IOL mode (COM1, COM2, COM3)
	2 Hz red » Signal overload (C/Q)
LED Signal	
Color	Yellow
Function	Off yellow » Digital channel not switched (low)
	On yellow » Digital channel switched (high)


- Stationary Unit - Base
- Mobile Unit - Remote

Axial coupler


Base / Remote

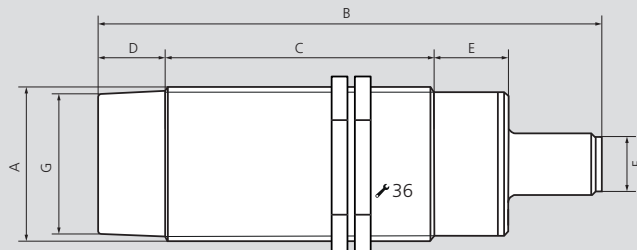

Display Base LED




Base




Male connector 5-pin
M12 x 1

Display Remote LED



Remote



Female connector 4-pin
M12 x 1

Number	LED	Color
1	Power LED	Green / Red
2	Signal LED	Yellow
3	IOL LED	Yellow / Red

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system M30-IOL

Type		Base	Remote
Id. No.		0E011604	0E011605
A	mm	M30 x 1.5	
B	mm	96	94
C	mm	52	
D	mm	13	
E	mm	18	
F	mm	M12 x 1 / Male	M12 x 1 / Female
G	mm	Ø 27	
Housing material		CrNi, PA66, PC GF30%	
Protection class		IP67	
Operating temperature		-20°C ... +50°C	
Storage temperature		-20°C ... +80°C	
Transmission distance		0 mm ... 10 mm (12 W: 0 mm ... 7mm)*	
Weight	kg	0.13	0.13
Operating voltage		24 V (18 ... 30 V)	-
Output voltage		-	24 V ± 10% DC
Power consumption (Base)		1500 mA	-
Power output (Remote)		-	500 mA
Overload protection / short circuit protection		✓	✓
Residual ripple		-	< 200 mV
Reverse polarity protection		✓	-
Temperature monitoring		✓	✓
Data-Valid Output		150 mA	-
Ready delay		< 600 ms	
PIN assignment	PIN	Signal Base	Signal Remote
Supply voltage	1	24 V IN	24 V OUT
Digital signal	2	0/24 V OUT	0/24 V IN
Ground	3	GND	GND
IO-Link Signal	4	IO-Link CQ	IO-Link CQ
Data-Valid	5	DAV 24 V	-


* V in ≥ 22 V Base

M30-4A

Axial coupler

Inductive Coupling System

■ Contact free transmission of energy and signals



Application/customer benefits

- Contact free transmission of energy and signals between moving / rotating and stationary components
- Application examples: Process monitoring edibles, manufacturing of plastic, test engineering, machine tools
- Dynamic Pairing
- Wear and maintenance free
- Operating display


Technical features

- Mounting: M30 x 1.5
- Operating voltage: 24 V $\pm$ 10%
- Transmission distance: 0 - 4 mm
- Transmission of energy: 24 V / 6 W (250 mA)
- Transmission of signals: 4 analog signals (4 - 20 mA / 0 - 10 V)
- Inverse-polarity protection (base), short-circuit proof (remote)
- Ports: Base male connector M12 x 1 (12-pin), remote female connector M12 x 1 (12-pin)
- Protection class: IP67

Standard equipment

Inductive coupler base or remote

Block diagram

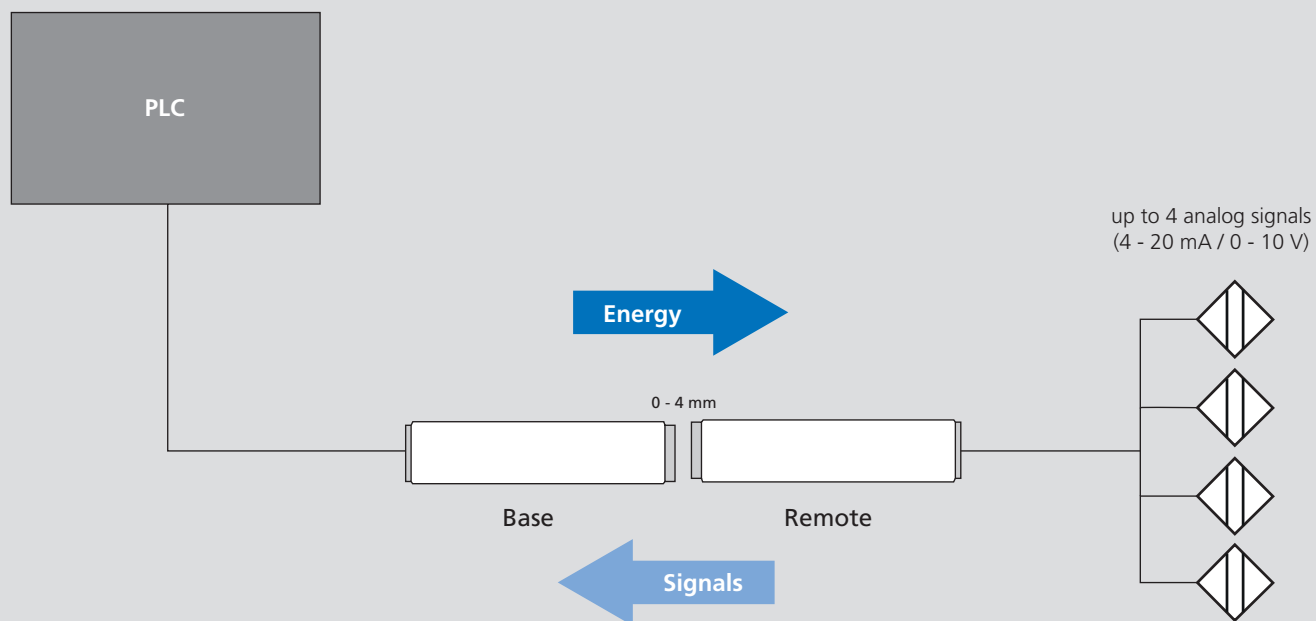


Subject to technical changes.
For more detailed information please ask our customer service.


- Stationary Unit - Base
- Mobile Unit - Remote

Axial coupler

Base / Remote:

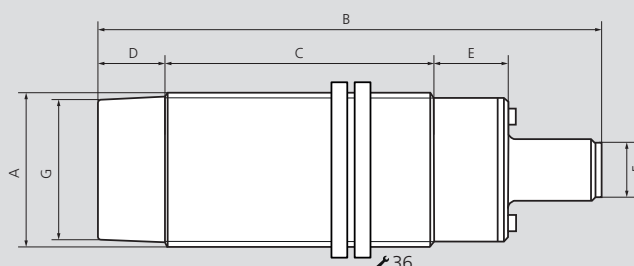


Base



Male connector 12-pin
M12 x 1

Remote



Female connector 12-pin
M12 x 1


Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system M30-4A

Type		Base 0 ... 10 V	Remote 0 ... 10 V	Base 4 ... 20 mA	Remote 4 ... 20 mA
Id. No.		0E010958	0E010959	0E010960	0E010961
A	mm	M30 x 1.5			
B	mm	98			
C	mm	52			
D	mm	13			
E	mm	14.5			
F	mm	M12	M12 / Female	M12	M12 / Female
G	mm	Ø 27			
Housing material		CuZn, PA66, PC GF 30%			
Protection class		IP67			
Operating temperature		0° C ... +60° C			
Storage temperature		-10 °C ... +80° C			
Transmission distance		0 mm ... 4 mm			
Weight	kg	0.21	0.23	0.21	0.23
Operating voltage		24 V ± 10% DC	-	24 V ± 10% DC	-
Output voltage		-	24V ± 10% DC	-	24 V ± 10% DC
Power consumption (Base)		< 500 mA	-	< 500 mA	-
Power output (Remote)		-	250 mA	-	250 mA
Overload protection / short circuit protection		✓	✓	✓	✓
Residual ripple		-	< 200 mV	-	< 200 mV
Reverse polarity protection		✓	-	✓	-
Data-Valid Output		max. 100 mA	-	max. 100 mA	-
Data-Valid Visual		✓	-	✓	-
Operational readiness		< 100 ms			
PIN assignment	PIN	Signal Base	Signal Remote	Signal Base	Signal Remote
Supply voltage	1	+24 V IN	+24 V OUT	+24 V IN	+24 V OUT
Analog signal 1	2	CH 1 0 ... 10 V OUT	CH 1 0 ... 10 V IN	CH 1 4 ... 20 mA OUT	CH 1 4 ... 20 mA IN
Ground connection 1	3	AGND-CH1*	AGND-CH1*	AGND-CH1*	AGND-CH1*
Analog signal 2	4	CH 2 0 ... 10 V OUT	CH 2 0 ... 10 V IN	CH 2 4 ... 20 mA OUT	CH 2 4 ... 20 mA IN
Ground connection 2	5	AGND-CH2*	AGND-CH2*	AGND-CH2*	AGND-CH2*
Analog signal 3	6	CH 3 0 ... 10 V OUT	CH 3 0 ... 10 V IN	CH 3 4 ... 20 mA OUT	CH 3 4 ... 20 mA IN
Ground connection 3	7	AGND-CH3*	AGND-CH3*	AGND-CH3*	AGND-CH3*
Analog signal 4	8	CH 4 0 ... 10 V OUT	CH 4 0 ... 10 V IN	CH 4 4 ... 20 mA OUT	CH 4 4 ... 20 mA IN
Ground connection 4	9	AGND-CH4*	AGND-CH4*	AGND-CH4*	AGND-CH4*
Ground	10	GND	GND	GND	GND
	11	NC	NC	NC	NC
**0 = no remote detected / 24 V = remote detected	12	**Data-Valid OUT	NC	NC	NC

* AGND = Analog Ground (galvanically isolated from GND)

** Only with inductive coupler M30-4A Base 0 ... 10 V



Application/customer benefits

- Inductive component detection / distance measurement
- High-precision, multi-dimensional position control
- Parameterizable sensor technology
- Communication interfaces IO-Link or analog signal
- Available for e-motion chucks (MM,CC) or as retrofit solution

Technical data

- Accuracy < 0.01 mm
- Signal output IO-Link or analog signal 0 - 10 V
- **proofline®** = sealed - low maintenance


Standard equipment

Product-specific tool stop


Example of integration e-sensing on MM *e-motion*

High-precision inductive component detection/
Distance measurement, parameterizable,
Accuracy < 0.01 mm


LED Status display

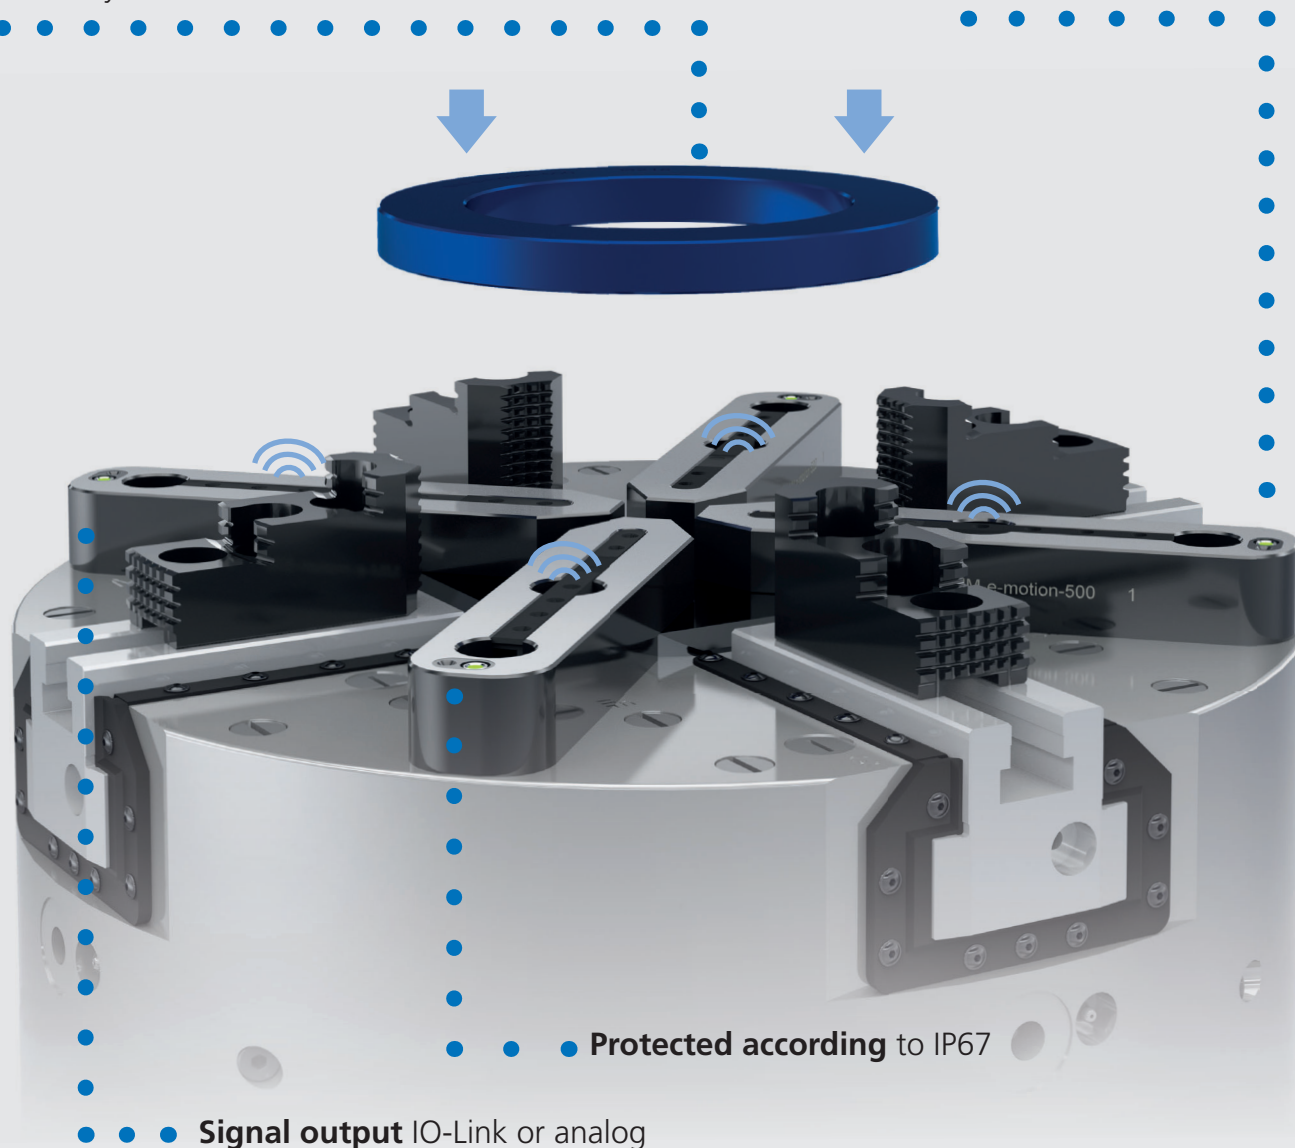

Integration power chuck scheme

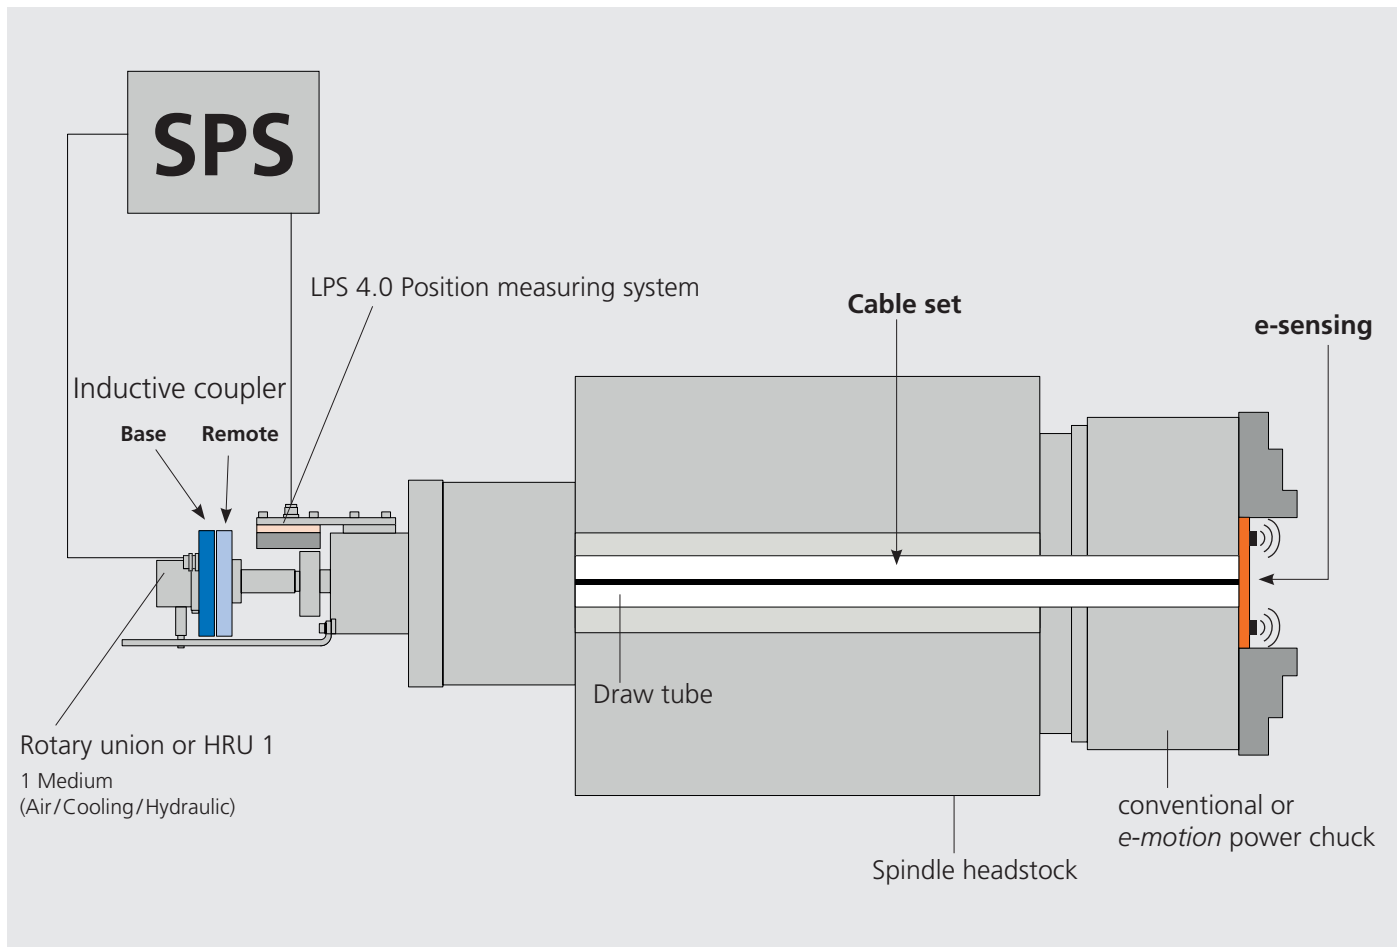


Example of integration CC e-motion

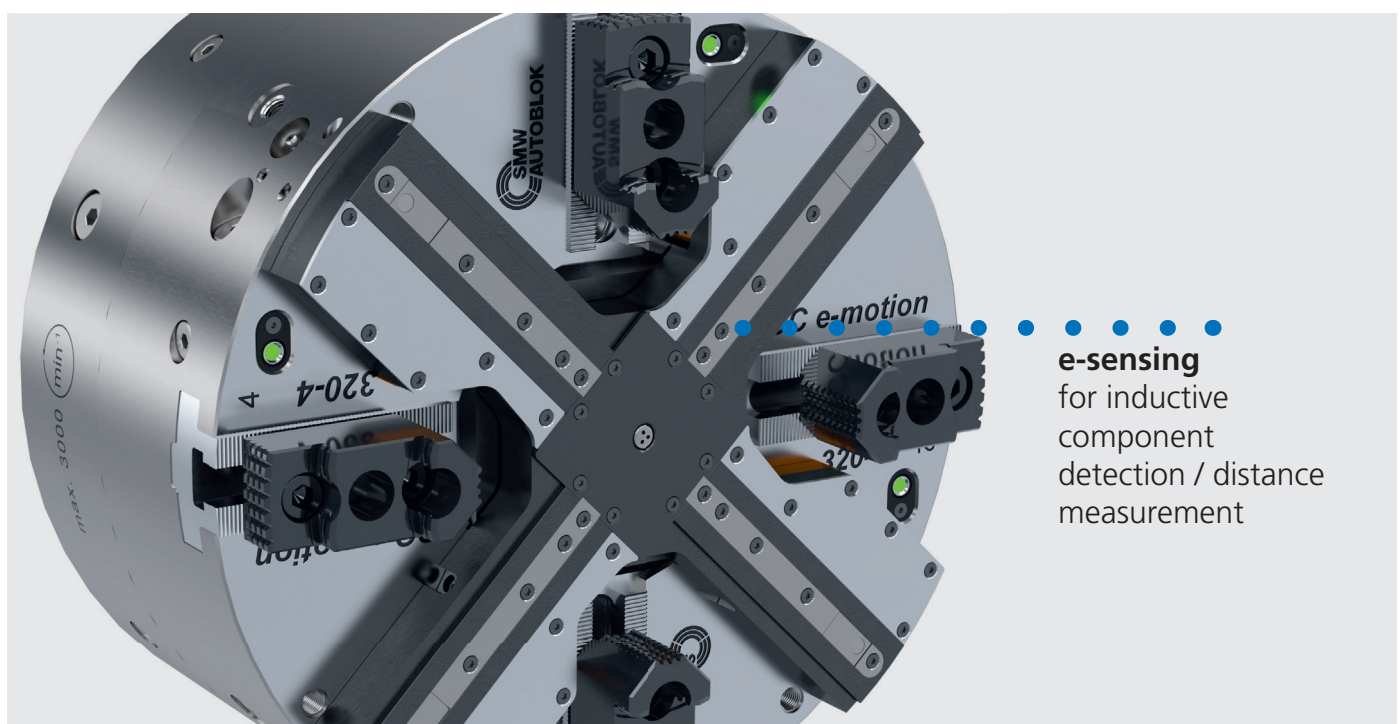

e-sensing
for inductive
component
detection / distance
measurement

- Contact free transmission of energy and signals
- For 1 medium (air, oil+air, cooling lubricant)

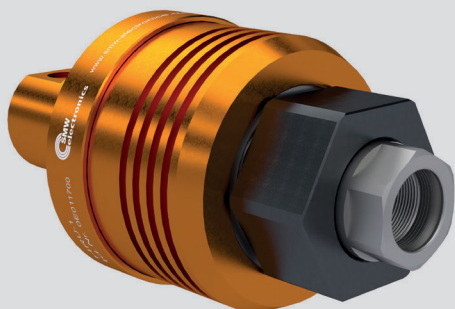

Application/customer benefits


- Rotary feed with loss- and wear-free energy, signal and additional media transmission from stationary to rotating units
- Application examples: Packaging machines, machine tools (e-sensing), labelling machines, robotics, rotary tables
- Also suitable for retrofit solution e-sensing with conventional chuck
- Data transmission 3x Analog / 3x Digital
- Media transmission: 1 medium (air, oil+air, cooling lubricant)

Technical features

- Power transmission 24 V, 2.5 W
- Signal transmission: 3x Analog 0 - 10 V / 3x Digital PNP
- Medium connection G1/4
- Speed max. 7000 r.p.m.

Standard equipment

Hybrid rotary union

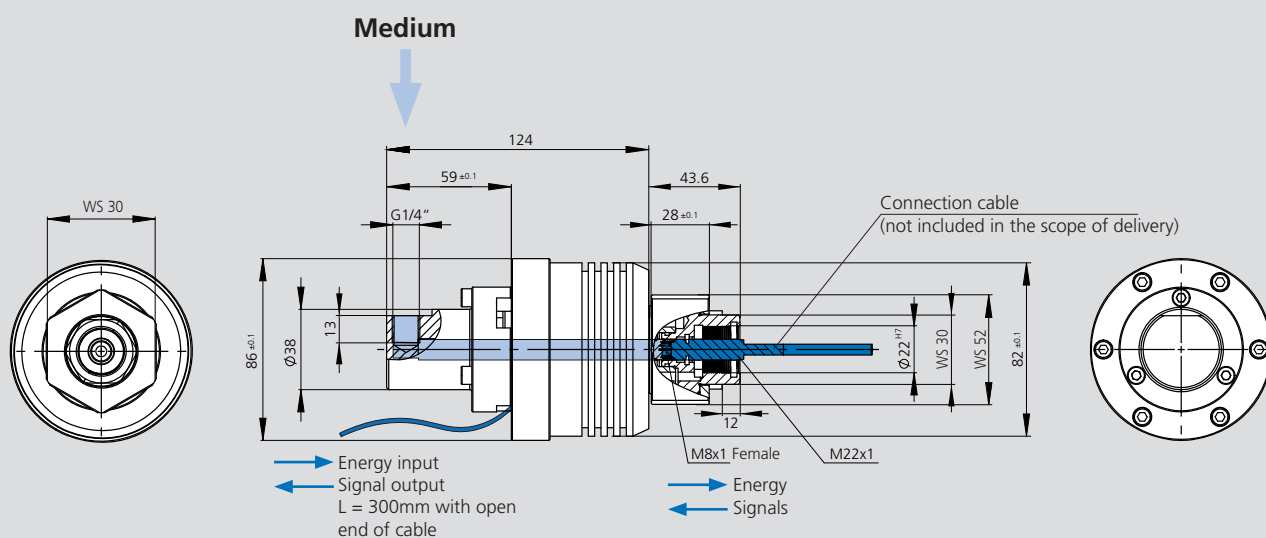


Subject to technical changes.
For more detailed information please ask our customer service.

Type	Hybrid rotary union - 1 medium		
Id. No.	0E011700		
Energy transmission	24 V, 2.5 W		
Signal transmission	3x Analog 0 - 10 V / 3x Digital PNP		
Connection Media	G1/4"		
Max. speed	7000 min ⁻¹		
Weight	-		
PIN-Assignment Inductive Coupling System	Color	Base	Remote
1	Brown	+ 24 V	+ 24 V
2	Green	Digital-1 OUT	D-IN1
3	Yellow	Digital-2 OUT	D-IN2
4	Grey	Digital-3 OUT	D-IN3
5	Blue	Analog-1 OUT	CH-1 IN
6	Red	Analog-2 OUT	CH-2 IN
7	Black	Analog-3 OUT	CH-3 IN
8		GND	GND


- Contact free transmission of energy and signals
- For 1 medium (air, oil+air, cooling lubricant)

Application example: e-sensing on conventional power chuck

Schematic

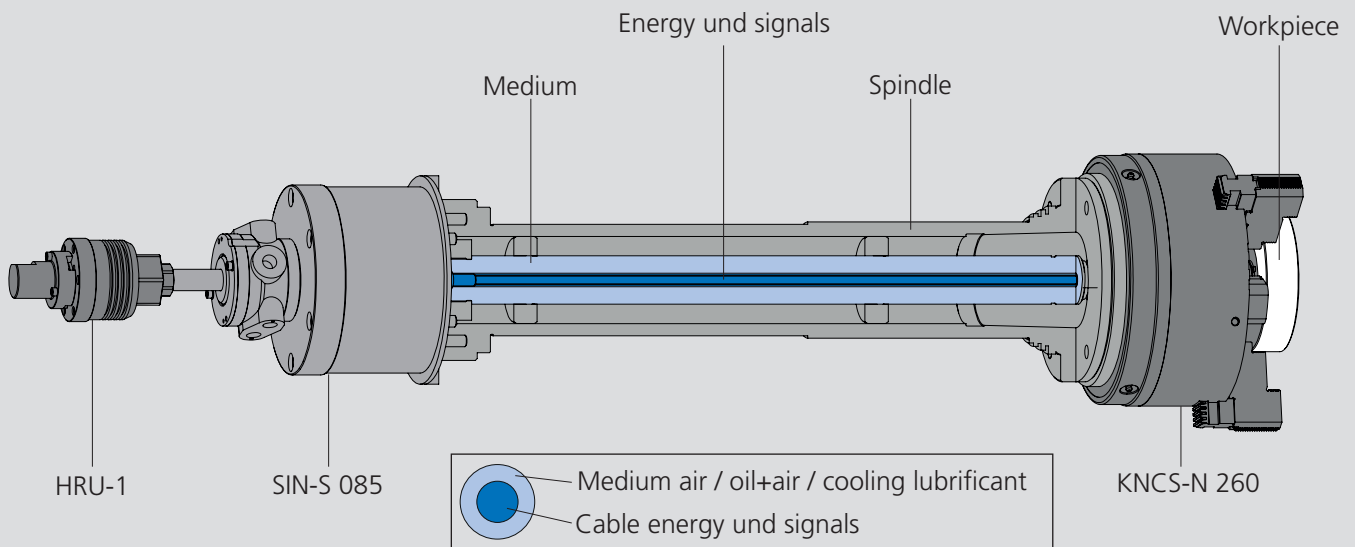

Function

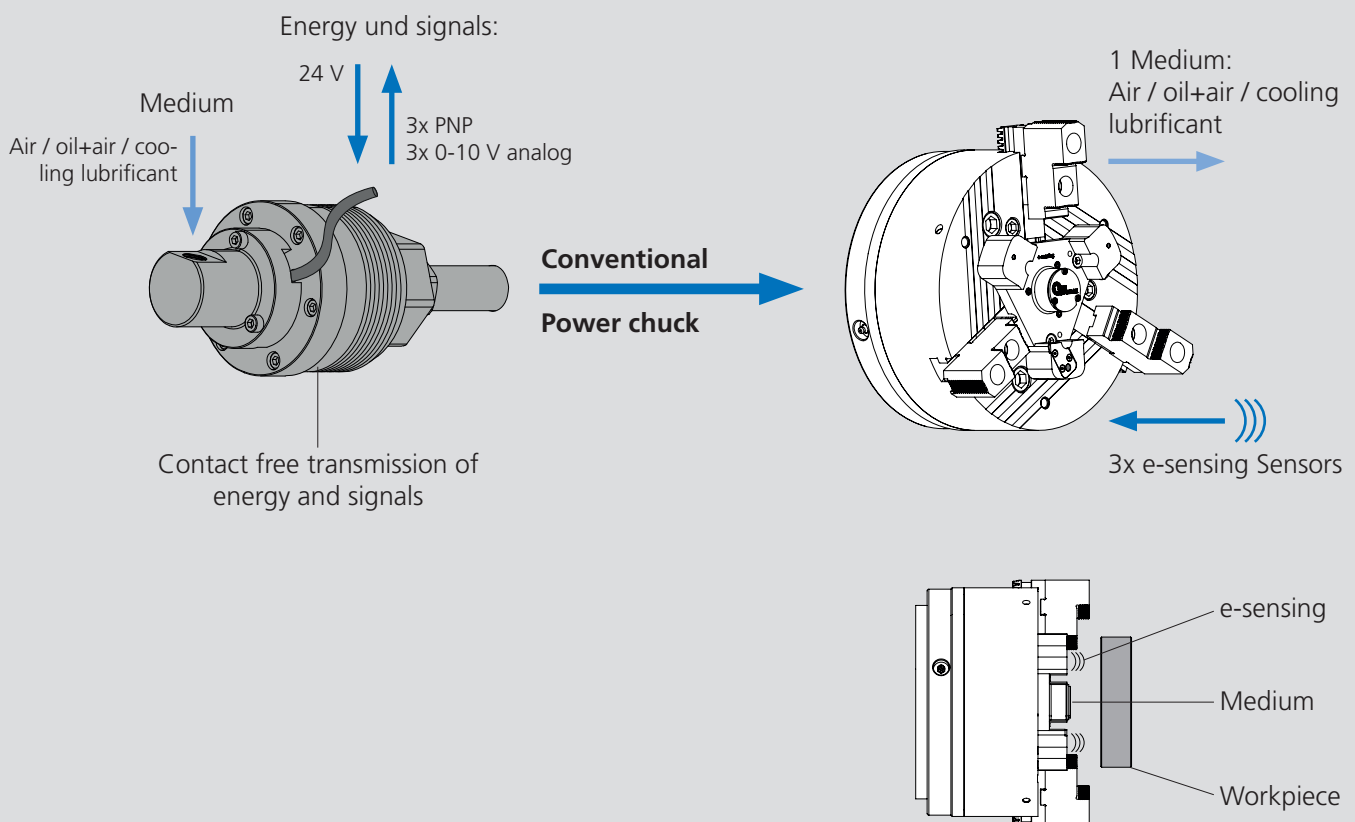

Also suitable for retrofit solutions!

LPS 4.0 IO

Linear Position Sensor System

High-precision inductive linear position sensor

Standard connection

M12 x 1 (5 Pole)

Common communication interfaces:

- IO-Link
- Analog signal: (0 - 10 V/4 - 20 mA)

Status displays LEDs


- Operation and
- Target detection

Housing plastic

Protection class: IP67 / 69K



Inductive position measurement by target / encoder unit

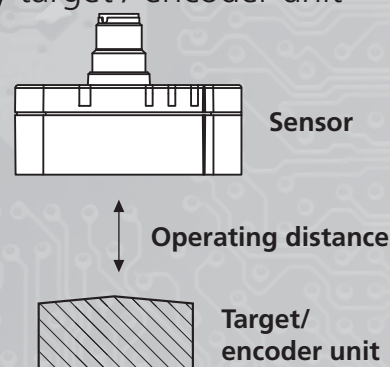


TARGET / ENCODER UNIT DESIGN


Required dimensions: LPS 4.0 48/80/120 IO

Dimensions	Remark
Operating distance A = 1.0 mm ± 0.25	A = Required distance (light and parallel) between measuring surface and the operating ring
Width B = 19 mm	B = Required width of the operating cam or operating ring
Angle α = 6°	α = Angle min. 6°

Cam

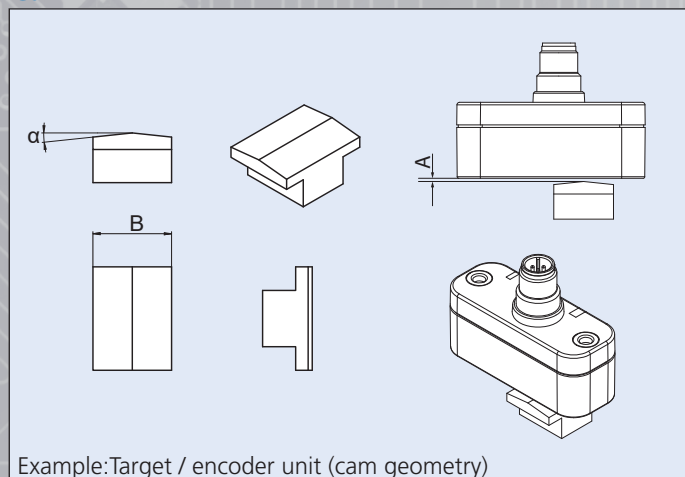


Ring

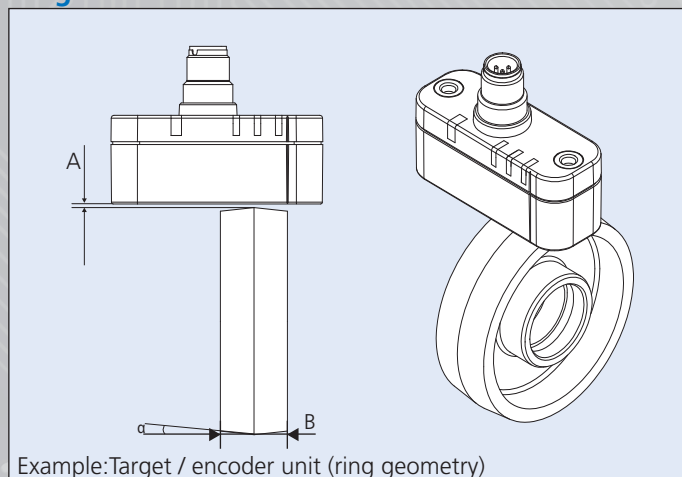

Application example

High-precision piston stroke sensing using LPS 4.0 IO

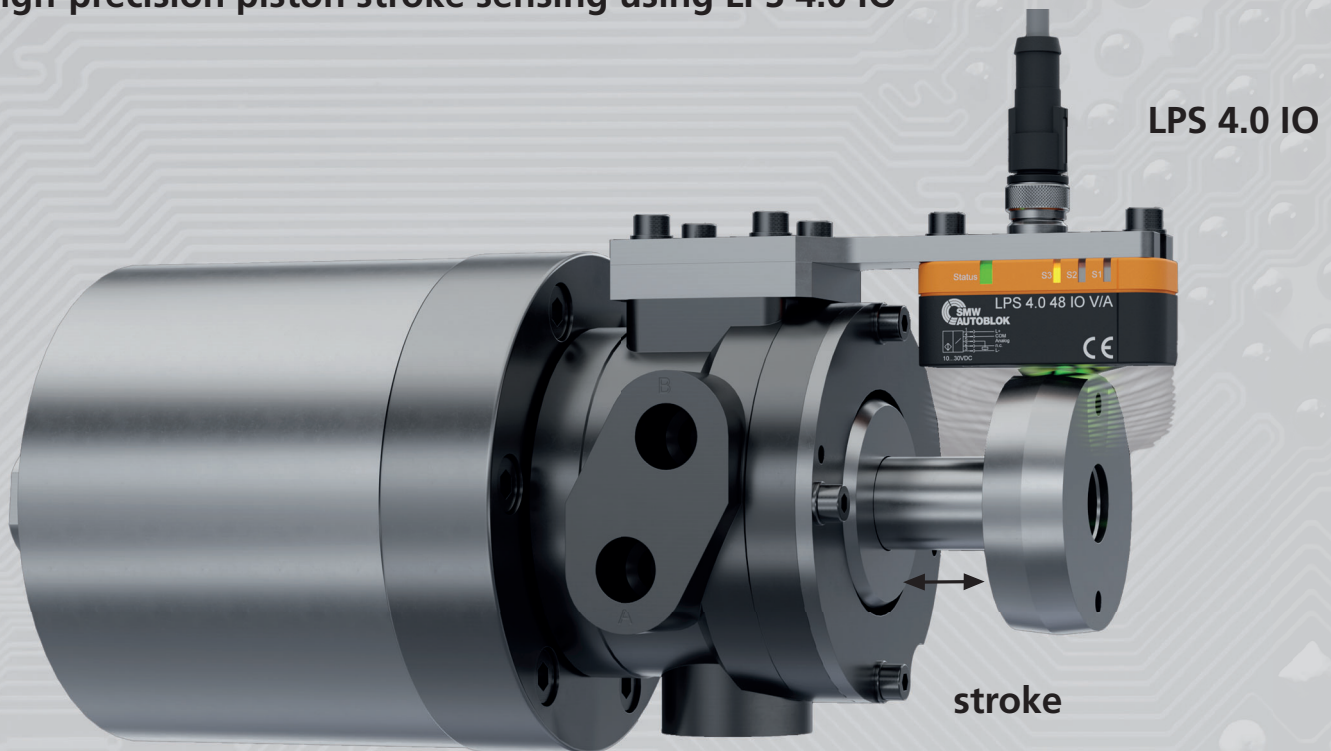

Clamping cylinder

Benefits:


- Measuring ranges from 0 - 120 mm
- Wear-free, due to contact free function
- Highest repeatability and precise positioning
- IO-Link and analog signal: (0 - 10 V, 4 - 20 mA)
- Plug & Play integration
- Extremely robust + protected according to IP67/69K

TARGET / ENCODER UNIT DESIGN

Required dimensions: **LPS 4.0 14 IO**


Dimensions	Remark
Operating distance $A = 1.0 \text{ mm} \pm 0.25$	A = Required distance (light and parallel) between measuring surface and the operating ring
Width $B = 11 \text{ mm}$	B = Required width of the operating cam or operating ring
Angle $\alpha = 6^\circ$	α = Angle min. 6°

Cam

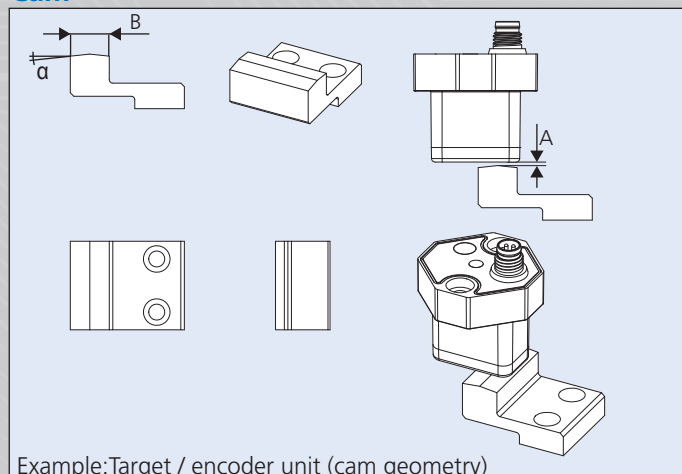

Example: Target / encoder unit (cam geometry)

Ring

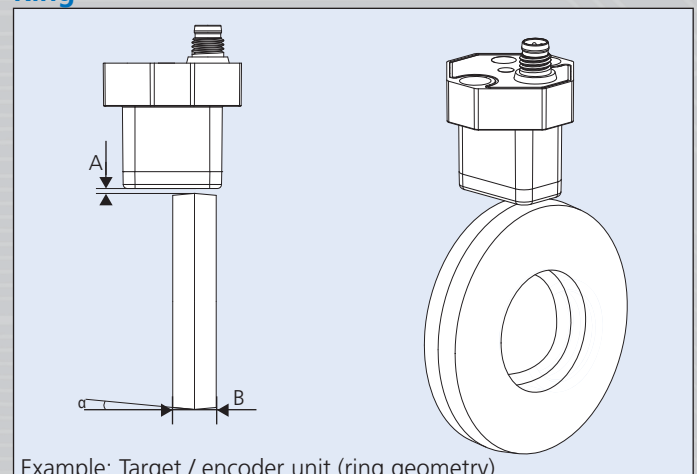

Example: Target / encoder unit (ring geometry)

LPS 4.0 14 IO

Linear Position Sensor

Measuring range 14 mm



Application/customer benefits

- High precise inductive linear position measuring system
- Ready for Industry 4.0

Technical features






- Inductive measuring system
- No interference from magnetic fields
- Measuring range: 14 mm
- Compact design / simple installation
- Analog output: 0 - 10 V (Id. No. 208106)
- IO-Link standard interface
- Protection class: IP67

Standard equipment

LPS 4.0 14 IO without cable

Ordering example

LPS 4.0 14 IO 0 - 10 V
Id. No. 208106
Cable with elbow plug 5 m
Id. No. 208241

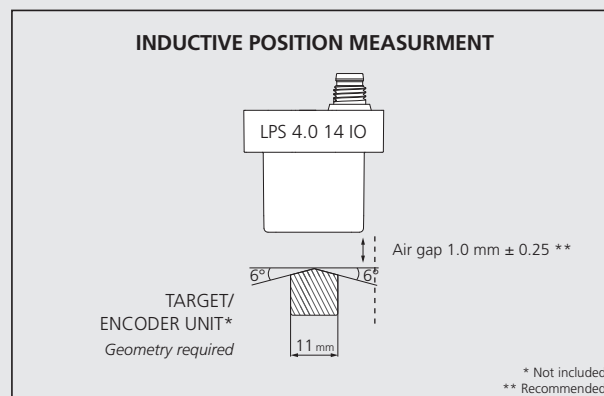

Pin Assignment

Pin	Description
1	24 V DC
2	Signal output: 0 - 10 V
3	GND
4	C/Q (IO-Link)


Male connector
M8x 1



Technical data

Type	LPS 4.0 14 IO 0 - 10 V
Id. No.	208106
Measuring range	14 mm
Output signal	0 - 10 V
Power supply	24 V DC
Repeat accuracy	± 0.05 mm
Linearity	± 0.20 mm
Temperature drift	0.25 mm
Operating temperature	10 - 60°
Protection class	IP67
Interface	IO-Link 1.0
MTTF _d	490 a
Mission time (T _M)	20 a
Diagnostic Coverage (DC)	0%

Cables for LPS 4.0 14 IO*	Length	Id. No.
Sensor connection cable straight plug M8 x 1 5-pin	5 m	208238
	10 m	208239
	15 m	208240
Sensor connection cable elbow plug M8 x 1 5-pin	5 m	208241
	10 m	208242
	15 m	208243

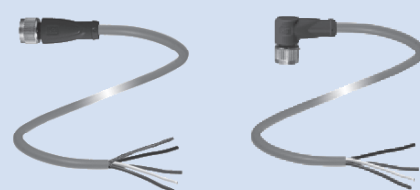

* Shielded PUR cable, 1 side cable end, 1 side with socket M8 x 1, machined and gold-plated contacts.



Application/customer benefits

- High precise inductive linear position measuring system
- Ready for Industry 4.0

Technical features


- Inductive measuring system
- No interference from magnetic fields
- Measuring range: 48 mm
- Compact design / simple installation
- Analog output: 0 - 10 V (Id. No. 208108) / 4 - 20 mA (Id. No. 208107)
- IO-Link standard interface
- Protection class: IP67
- LEDs for operating status

Standard equipment


LPS 4.0 48 IO without cable

Ordering example

LPS 4.0 48 IO 0 - 10 V
Id. No. 208108
Cable with elbow plug 5 m
Id. No. 208247

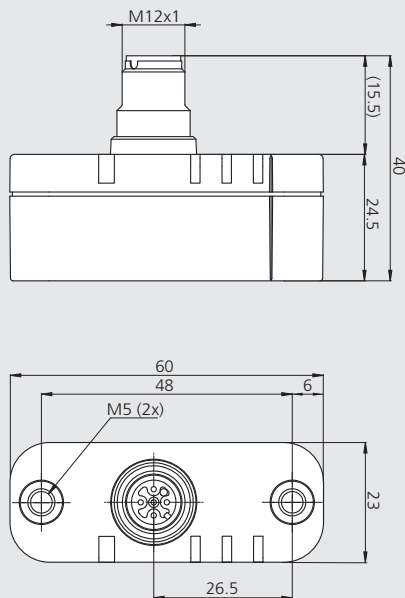

INDUCTIVE POSITION MEASUREMENT

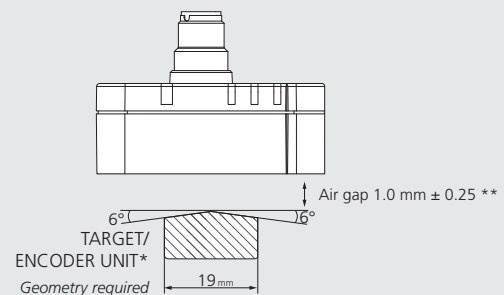


* Not included
** Recommended

Pin Assignment

Pin	Description
1	24 V DC
2	not used
3	GND
4	C/Q (IO-Link)
5	Signal output: 0 - 10 V (Id. No. 208108) Signal output: 4 - 20 mA (Id. No. 208107)


Male connector
M12 x 1



Technical data

Type	LPS 4.0 48 IO 0 - 10 V	LPS 4.0 48 IO 4 - 20 mA
Id. No.	208108	208107
Measuring range	48 mm	
Output signal	0 - 10 V	4 - 20 mA
Power supply	24 V DC	
Repeat accuracy	± 0.1 mm	
Linearity	± 0.2 mm	
Temperature drift	0.25 mm	
Operating temperature	10 - 60°	
Protection class	IP67	
Interface	IO-Link 1.1	
MTTF _d	365 a	
Mission time (T _M)	20 a	
Diagnostic Coverage (DC)	0%	

Cables for LPS 4.0 48 IO*	Length	Id. No.
Sensor connection cable straight plug M12 x 1 5-pin	5 m	208244
	10 m	208245
	15 m	208246
Sensor connection cable elbow plug M12 x 1 5-pin	5 m	208247
	10 m	208248
	15 m	208249

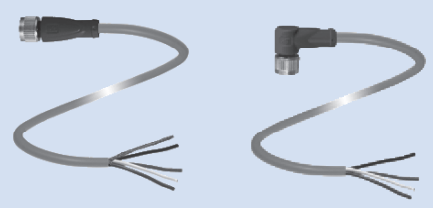

* Shielded PUR cable, 1 side cable end, 1 side with socket M12 x 1, machined and gold-plated contacts.

LPS 4.0 80 IO

Measuring range 80 mm

Linear Position Sensor

Application/customer benefits

- High precise inductive linear position measuring system
- Ready for Industry 4.0

Technical features

- Inductive measuring system
- No interference from magnetic fields
- Measuring range: 80 mm
- Compact design / simple installation
- Analog output: 0 - 10 V / 4 - 20 mA
- IO-Link standard interface
- Protection class: IP67
- LEDs for operating status

Standard equipment

LPS 4.0 80 IO without cable



Ordering example

LPS 4.0 80 IO 0 - 10 V

Id. No. 212001

Cable with elbow plug 5 m


Id. No. 208247

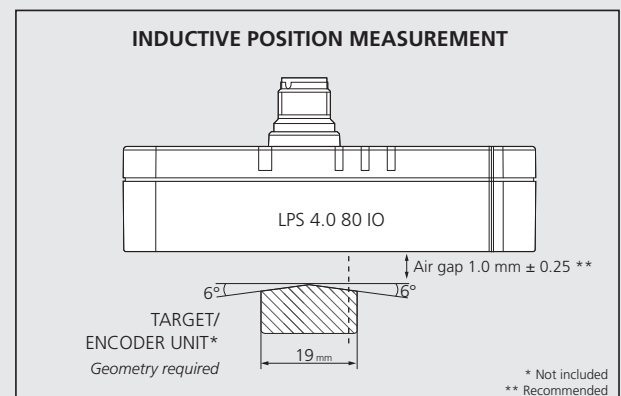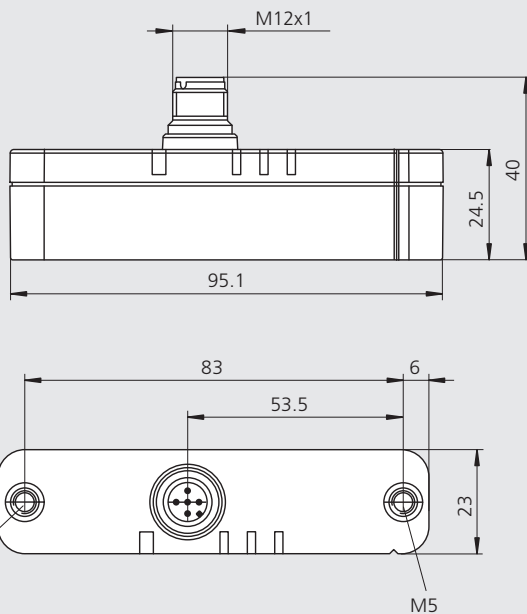

Pin Assignment

Pin	Description
1	24 V DC
2	not used
3	GND
4	C/Q (IO-Link)
5	Signal output: 0 - 10 V (Id. No. 212001) Signal output: 4 - 20 mA (Id. No. 212000)


Male connector
M12 x 1



Technical data

Type	LPS 4.0 80 IO 0 - 10 V	LPS 4.0 80 IO 4 - 20 mA
Id. No.	212001	212000
Measuring range	80 mm	
Output signal	0 - 10 V	4 - 20 mA
Power supply	24 V DC	
Repeat accuracy	± 0.1 mm	
Linearity	± 0.2 mm	
Temperature drift	0.25 mm	
Operating temperature	10 - 60°	
Protection class	IP67	
Interface	IO-Link 1.1	
MTTF _d	311 a	
Mission time (T _M)	20 a	
Diagnostic Coverage (DC)	0%	

Cables for LPS 4.0 80 IO*	Length	Id. No.
Sensor connection cable straight plug M12 x 1 5-pin	5 m	208244
	10 m	208245
	15 m	208246
Sensor connection cable elbow plug M12 x 1 5-pin	5 m	208247
	10 m	208248
	15 m	208249

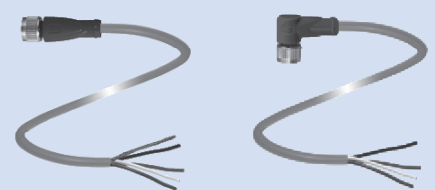

* Shielded PUR cable, 1 side cable end, 1 side with socket M12 x 1, machined and gold-plated contacts.



Application/customer benefits

- High precise inductive linear position measuring system
- Ready for Industry 4.0

Technical features



- Inductive measuring system
- No interference from magnetic fields
- Measuring range: 120 mm
- Compact design / simple installation
- Analog output: 0 - 10 V (Id. No. 208110) / 4 - 20 mA (Id. No. 208109)
- IO Link standard interface
- Protection class: IP67
- LEDs for operating status

Standard equipment

LPS 4.0 120 IO without cable

Ordering example


LPS 4.0 120 IO 0 - 10 V
Id. No. 208110
Cable with elbow plug 5 m
Id. No. 208247

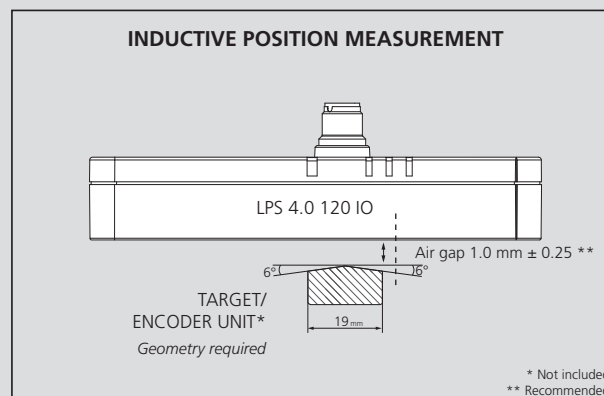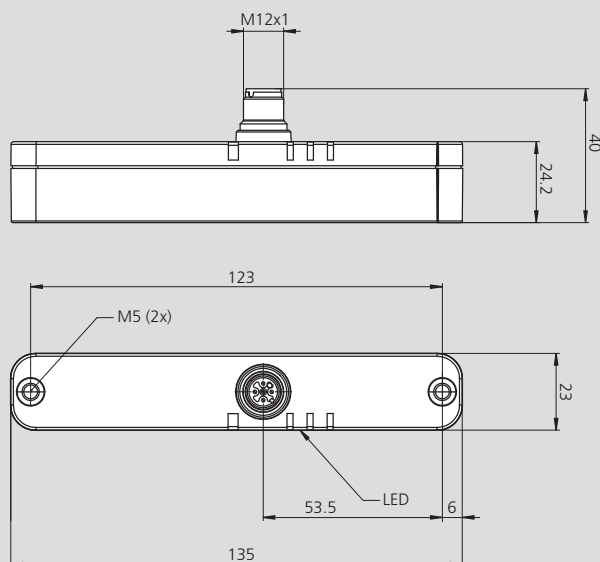

Pin Assignment

Pin	Description
1	24V DC
2	not used
3	GND
4	C/Q (IO-Link)
5	Signal output: 0 - 10 V (Id. No. 208110)
	Signal output: 4 - 20 mA (Id. No. 208109)

Male connector
M12 x 1



Technical data

Type	LPS 4.0 120 IO 0 - 10 V	LPS 4.0 120 IO 4 - 20 mA
Id. No.	208110	208109
Measuring range	120 mm	
Output signal	0 - 10 V	4 - 20 mA
Power supply	24 V DC	
Repeat accuracy	± 0.1 mm	
Linearity	± 0.2 mm	
Temperature drift	0.25 mm	
Operating temperature	0 - 70°	
Protection class	IP67	
Interface	IO-Link 1.1	
MTTF _d	271 a	
Mission time (T _M)	20 a	
Diagnostic Coverage (DC)	0%	


Cables for LPS 4.0 120 IO*	Length	Id. No.
Sensor connection cable straight plug M12 x 1 5-pin	5 m	208244
	10 m	208245
	15 m	208246
Sensor connection cable elbow plug M12 x 1 5-pin	5 m	208247
	10 m	208248
	15 m	208249



* Shielded PUR cable, 1 side cable end, 1 side with socket M12 x 1, machined and gold-plated contacts.

IO-Link Hub 16DI

Input module for up to 16 signals (IN)



Application/customer benefits


- Input module for up to 16 digital input signals
- 8 x M12 plug connections
- Solid metal housing
- Plug & Play

Technical features

- IO-Link Hub
- 8 x M12 A-coded I/O connection
- 16 digital signals (IN)
- Reverse polarity protection, short circuit proof
- M12, 5-poles, L-coded power connection
- Protection class: IP69K

Standard equipment

IO-Link Hub 16DI

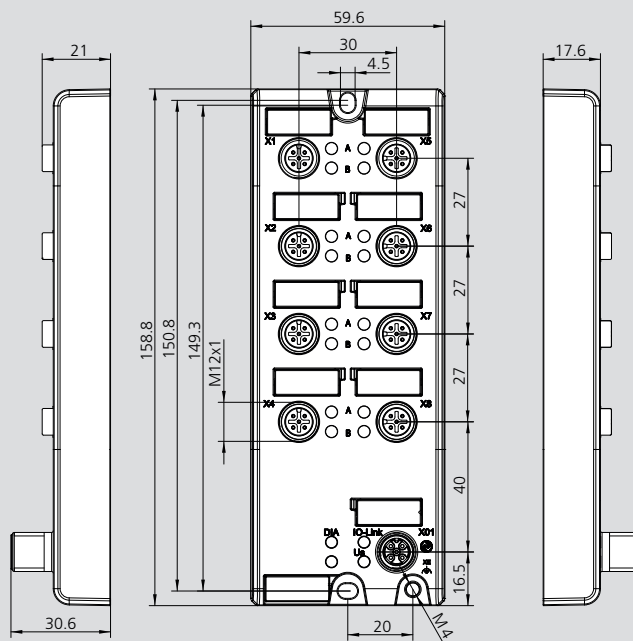


Subject to technical changes.
For more detailed information please ask our customer service.



Type	IO-Link Hub 16DI
Id. No.	OE011404
Housing material	Metal, zinc die-cast
Protection class	IP69K
Dimensions (WxHxD)	60 mm x 31 mm x 159 mm
Weight	390 g
Ambient temperature (operation)	-20 °C to 70 °C
Contact base material	gold-plated


Application example with an inductive coupling system

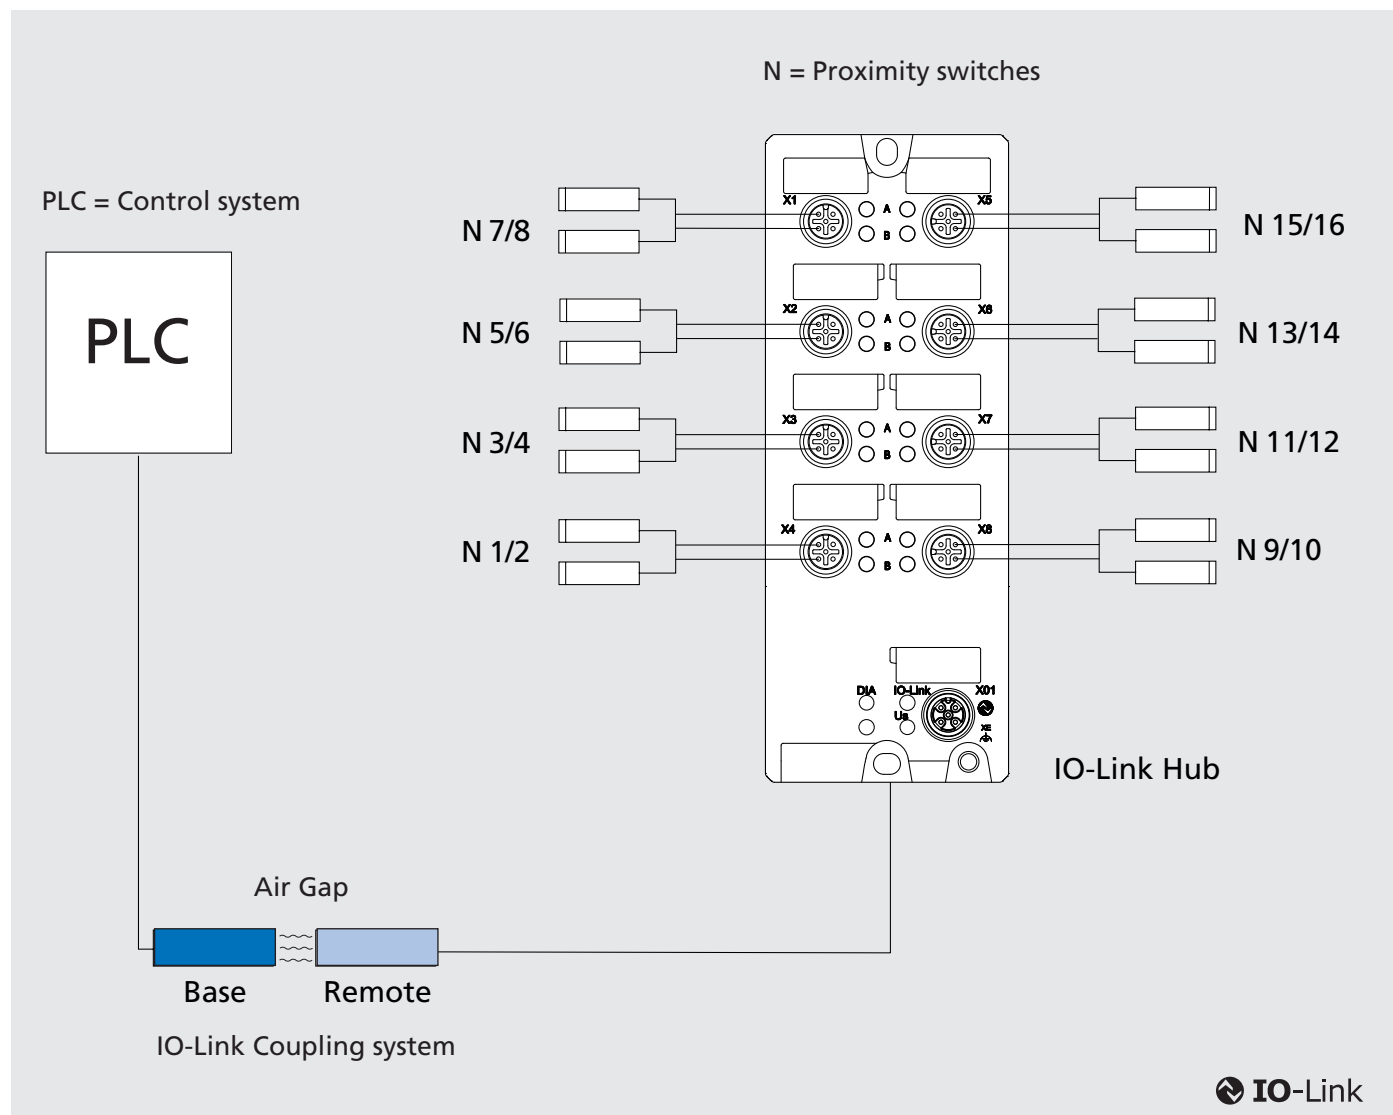

Type	IO-Link Hub 16DI
Id. No.	0E011404
IO-Link	
Connection	M12, 5-poles, A-coded
Specification	V1.1.2
Transmission rate / COM mode	COM 3 (230.4 kbps)
Power supply	
Connection module supply voltage	M12, 5-poles, A-coded
Power supply	18...30 V
Reverse polarity protection	Yes
Status indicator	LED green
Diagnostic indicator	LED red
Connection sensor supply voltage	M12 power, 5-poles, L-coded
Sensor supply voltage	18...30 V
Digital input channels	
Number of digital input channels	16
Connection	M12, 5-poles, A-coded
Number of ports	8x, X1 to X8
Input wiring	2, 3-wire
Nominal voltage	24 V (module power supply)
Sensor type	PNP

IO-Link Hub 16DIO

Input / output module for up to 16 signals (IN/OUT)



Application/customer benefits


- Module for 16 digital input and output signals
- 8x M12 plug connections
- Solid metal housing
- Plug & Play

Technical features

- IO-Link Hub
- 8x M12 A-coded I/O connection
- 16 digital signals (IN/OUT)
- Reverse polarity protection, short circuit proof
- M12, 5-poles, L-coded power connection
- Protection class: IP69K

Standard equipment

IO-Link Hub 16DIO

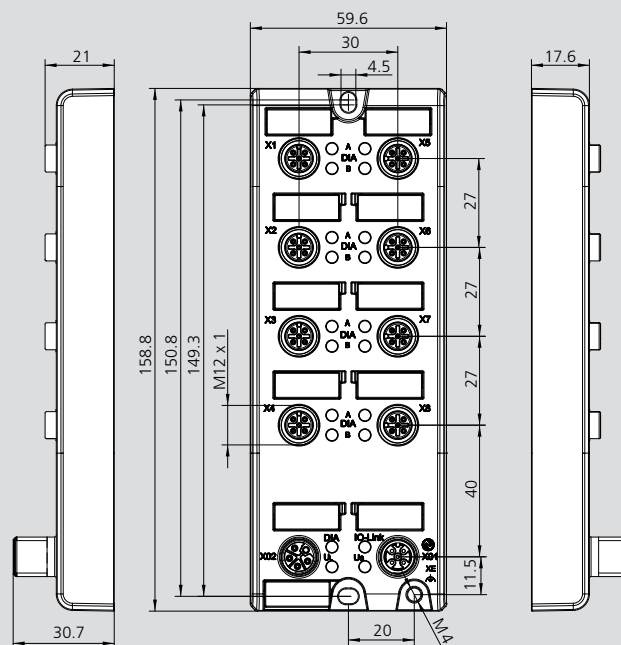


Subject to technical changes.
For more detailed information please ask our customer service.

Type	IO-Link Hub 16DIO
Id. No.	OE011403
Housing material	Metal, zinc die-cast
Protection class	IP69K
Dimensions (WxHxD)	60 mm x 31 mm x 159 mm
Weight	400 g
Ambient temperature (operation)	-20 °C to 70 °C
Contact base material	gold-plated

Type	IO-Link Hub 16DIO
Id. No.	0E011403
IO-Link	
Connection	M12, 5-poles, A-coded
Specification	V1.1.2
Transmission rate / COM mode	COM 3 (230.4 kbps)
Power supply	
Connection module supply voltage	M12, 5-poles, A-coded
Supply voltage	18...30 V
Reverse polarity protection	Yes
Status indicator	LED green
Diagnostic indicator	LED red
Connection sensor supply voltage	M12 power, 5-poles, L-coded
Number of connections	1
Sensor supply voltage	18...30 V
Digital input channels	
Number of digital input channels	16
Connection	M12, 5-poles, A-coded
Number of ports	8x, X1 to X8
Input wiring	2-, 3-, 4-wire
Nominal voltage	24 V DC via US (module power supply)
Digital output channels	
Number of digital output channels	16
Connection	M12, 5-poles, A-coded
Number of ports	8x, X1 to X8
Output wiring	2-, 3-wire
Nominal voltage	24 V DC (supplied PIN 2 / 4 of M12 power connector)


- Sensor-/ actuator connection cable
- Power cable

Sensor actuator cable - 1 meter

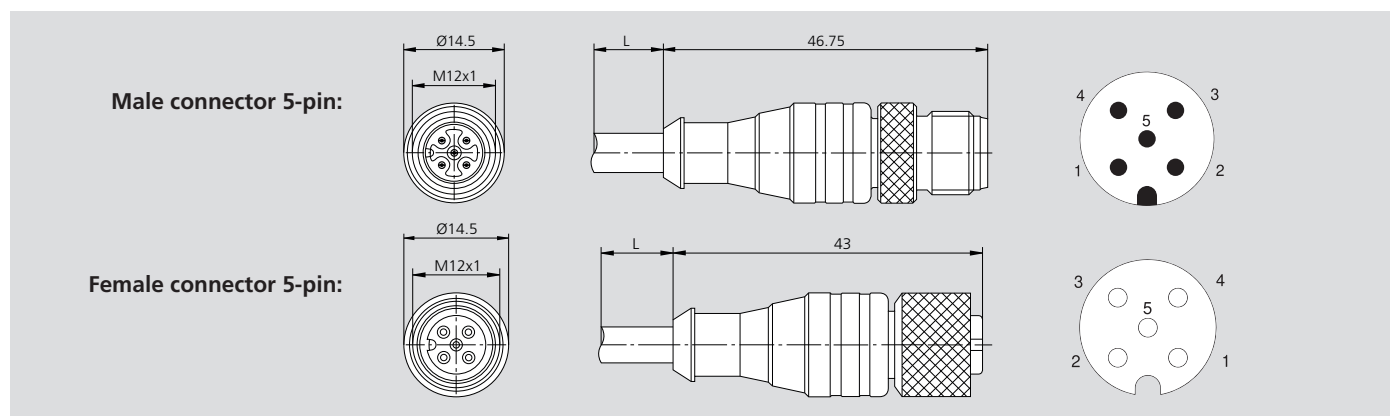

Type	Connection cable M12 pin straight to M12 socket straight	
Id. No.	0E011405	0E011406
Number of poles	Side 1 = 5, side 2 = 5	
Coding	A	
Material contact	CuSn, gold-plated	
Cable sheath	PUR black	
Cable construction	5 x 0.5 mm ²	
UL approval	UL 2238; cURus	
Protection class	IP65, IP67, IP68, IP69K	
Length	1 m	3 m

Power cable for IO-Link hub



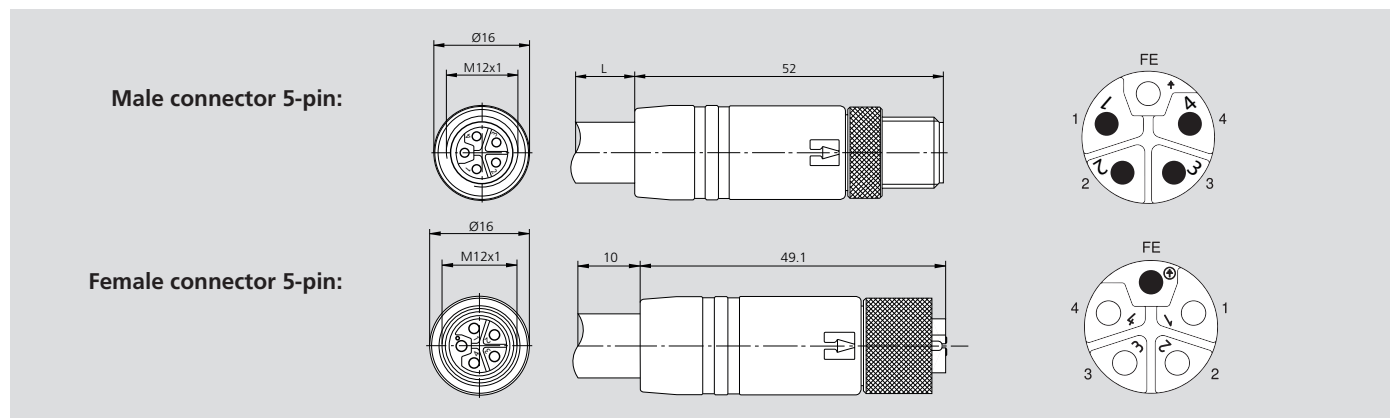


Type	M12 power connection cable: socket, straight
Id. No.	0E011407
Number of poles	5 (4+FE)
Coding	L
Material contact	CuNi, gold-plated
Cable sheath	PUR grey
Cable construction	5 x 1.5 mm ²
UL approval	UL 2237; cULus
Protection class	IP65, IP67, IP68, IP69K
Length	5 m
Shielding	unshielded
Operating voltage	63 V
Rated current	16 A




■ Power cable

Power cable for IO-Link hub (0E011404)

Male connector 5-pin:

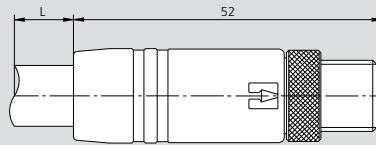




Female connector 5-pin:

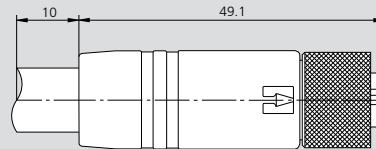

SMW-electronics Type	M12 power connection cable: socket, straight
Id. No.	0E011407
Number of poles	5 (4+FE)
Coding	L
Material contact	CuNi, gold-plated
Cable sheath	PUR grey
Cable construction	5 x 1.5 mm ²
UL approval	UL 2237; cULus
Protection class	IP65, IP67, IP68, IP69K
Length	5 m
Shielding	unshielded
Operating voltage	63 V
Rated current	16 A

■ For Inductive couplers M30, M18 and M12




Mounting bracket for inductive coupler M30

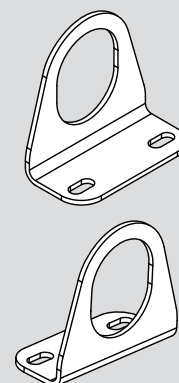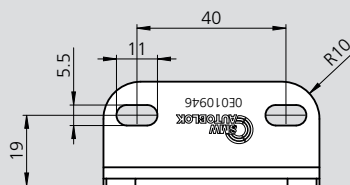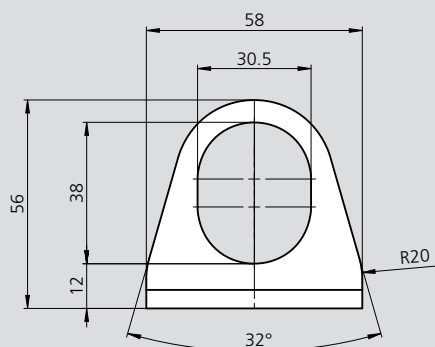

Scope of delivery: 1 piece

Type	Id. No.
Mounting bracket M30	OE010946




Mounting bracket for inductive coupler M18

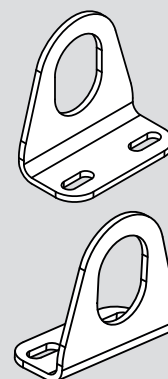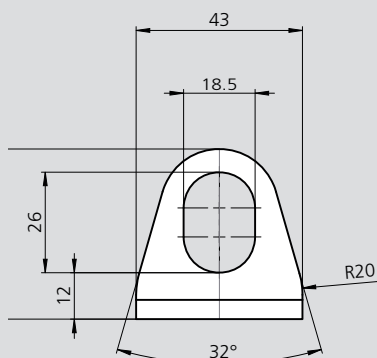

Scope of delivery: 1 piece

Type	Id. No.
Mounting bracket M18	OE010947

Mounting bracket for inductive coupler M12

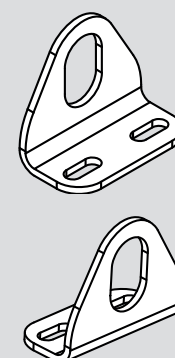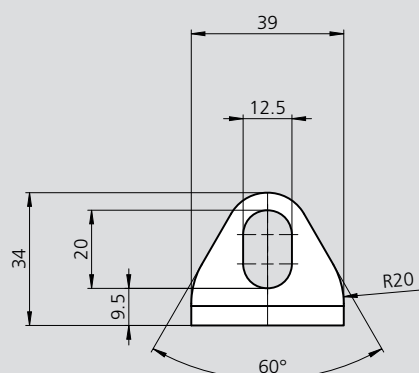

Scope of delivery: 1 piece

Type	Id. No.
Mounting bracket M12	OE010948

Notes

Multi Device

CLAMPING FORCE MEASURING DEVICE + ASSISTANCE SYSTEM

GFT-X 4.0

Wireless gripping force and speed measuring of jaw chucks and collet chucks in dynamic or static measuring mode.



Measuring heads

M3/M4

Measuring heads for jaw chucks

Clamping-Ø 72 to 108 mm



Measuring head convertible for 2 and 3 jaws

Measuring head	Range/gripping force	
	2 Jaws	3 Jaws
M3	0 to 180 kN	0 to 270 kN
	Id. No. 207074	
M4	0 to 30 kN	0 to 45 kN
	Id. No. 207259	



Separate measuring head for 2, 3 and 6 jaws

Measuring head	Range/gripping force
	6 Jaws
M3-6	0 to 270 kN on request
M4-6	0 to 45 kN on request

M2

Measuring head for collet chucks

Clamping-Ø 42 mm



For collets with 3 segments

Measuring head	Range/gripping force
	Collets
M2	0 to 120 kN
	Id. No. 207258

M1

Measuring head for collet chucks

Clamping-Ø 18 mm



For collets with 3 segments

Measuring head	Range/gripping force
	Collets
M1	0 to 75 kN
	Id. No. 207257

Features GFT-X 4.0

- **Wireless data transfer** from measuring head to table via Bluetooth for the measuring of dynamic and static clamping forces and speed (with included bracket)
- **Built-in camera** in tablet
- **Assistance systems:**
Manuals, Jaw Finder, Chuck Finder, Technical calculations
- **Rechargeable battery**, operation time in use: 8 h
- **Smart user interface**
- Tablet suitable for **industrial use** (Protection class: IP67)
- **Display** kN or lbf
- **Languages:**
German, English, Spanish
- **Measured clamping forces can be evaluated**
by the integrated software or
by the display software on Laptop / PC
- **4 Measuring heads** for jaw chucks and
2 Measuring heads for collet chucks



Gripping force tester – GFT-X 4.0 with measuring head



GFT-X 4.0

Multifunctional Gripping Force Tester

Wireless gripping force measuring

Ordering overview and technical data

Standard equipment with GFT-X 4.0

Case with:

- Large Multi Device Tablet.
- Measuring head M3 (2 and 3 jaws) for jaw chucks with extensions and loading device.
- Torx-key T15 and spare screws.
- Bracket with magnet for measuring of speed.
- Loading cable with USB port.
- USB cable for Tablet.
- Adapter for USA, UK and Southern Europe.

Ordering data

GFT-X 4.0 case incl. Tablet, Measuring head M3 (2 and 3 jaws) Id. No. 206844

Option:

Measuring head M1 (for collet chucks)	Id. No.	207257
Measuring head M2 (for collet chucks)	Id. No.	207258
Measuring head M3 (2 and 3 jaws)	Id. No.	207074
Measuring head M4 (2 and 3 jaws, high-precision)	Id. No.	207259
Measuring head M3 (6 jaws)	Id. No.	207586
Measuring head M4 (6 jaws, high-precision)	Id. No.	207587



Display software PC / Laptop


- The data transfer is via an USB interface.
- The software can be run under all standard windows systems.

Input

- Automatic measuring of the data (gripping force - speed).
- The number of measuring steps can be programmed free.

Output

- Table gripping force / speed.
- Diagram gripping force / speed.

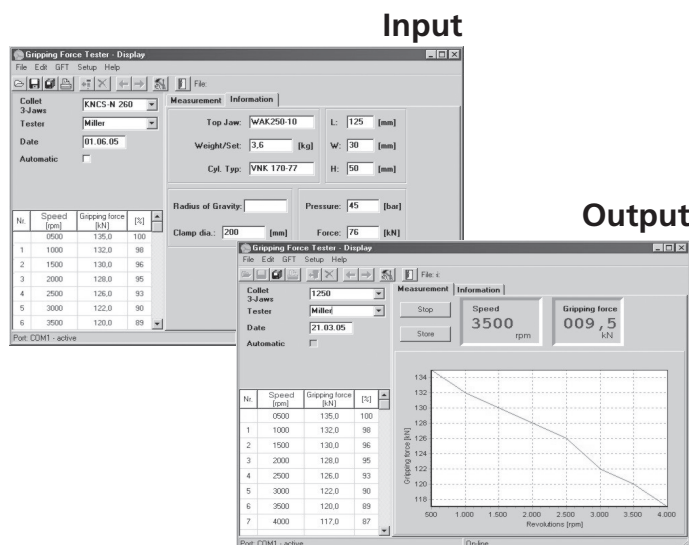

Technical data


Tablet	
Display / Grip force F – speed	Display in kN / lbf - r.p.m
Data transfer	Bluetooth 4.0
Power supply / Transformer	100 / 240 V AC, 50 to 60 Hz
Distance Tablet / Measuring head	1-4 m (appr.)
Interface PC / Laptop	USB 2.0
Operating temp.	0 to 40° (32°-100 °F)
Protection class	IP 67

Warning: Machine door must be closed while measuring head is rotating!

Measuring heads				
	Measuring head M1	Measuring head M2	Measuring head M3	Measuring head M4
Application	collet Ø 18	collet Ø 42	chuck 2 / 3 or 2 / 3 / 6 jaws	
Clamping diameter	18 mm	42 mm	72 to 108 mm	72 to 108 mm
No. of jaws	collet 3 x slotted	collet 3 x slotted	2 and 3 jaws / 6 jaws	
Power supply	internal rechargeable capacitor			
Capacity of power supply	ca. 1.5 h at 50 % d.c.			
Data transfer	Bluetooth 4.0			
Range / gripping force F max.	0 to 75 kN	0 to 120 kN	0 to 180 kN (2-jaws) 0 to 270 kN (3 / 6-jaws)	0 to 30 kN (2-jaws) 0 to 45 kN (3 / 6-jaws)
Speed r.p.m	<10.000 r.p.m.	<8.000 r.p.m.	<6.000 r.p.m.	<6.000 r.p.m.
Accuracy (F / r.p.m)	<5% / <1% fsr	<5% / <1% fsr	<3% / <1% fsr	<1.5% / <1% fsr

Notes

Application examples

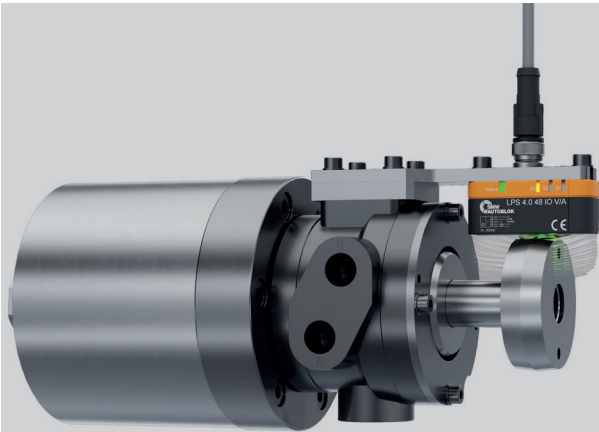


Application: Cylinder stroke sensing with linear position sensor LPS 4.0

- Inductive position monitoring
- Highest accuracy
- Signal output IO-Link, analog signal
- Various measuring lengths: 14, 48, 80 and 120 mm


Application: Status query transport system with inductive coupler M30

- Inductive transmission of energy and signals
- Very fast connection set-up between base and remote system
- Dynamic pairing: 1 base system connects to several remote units
- Suitable for clean room applications
- Different signals possible (IO-Link, digital signals, analog signals)

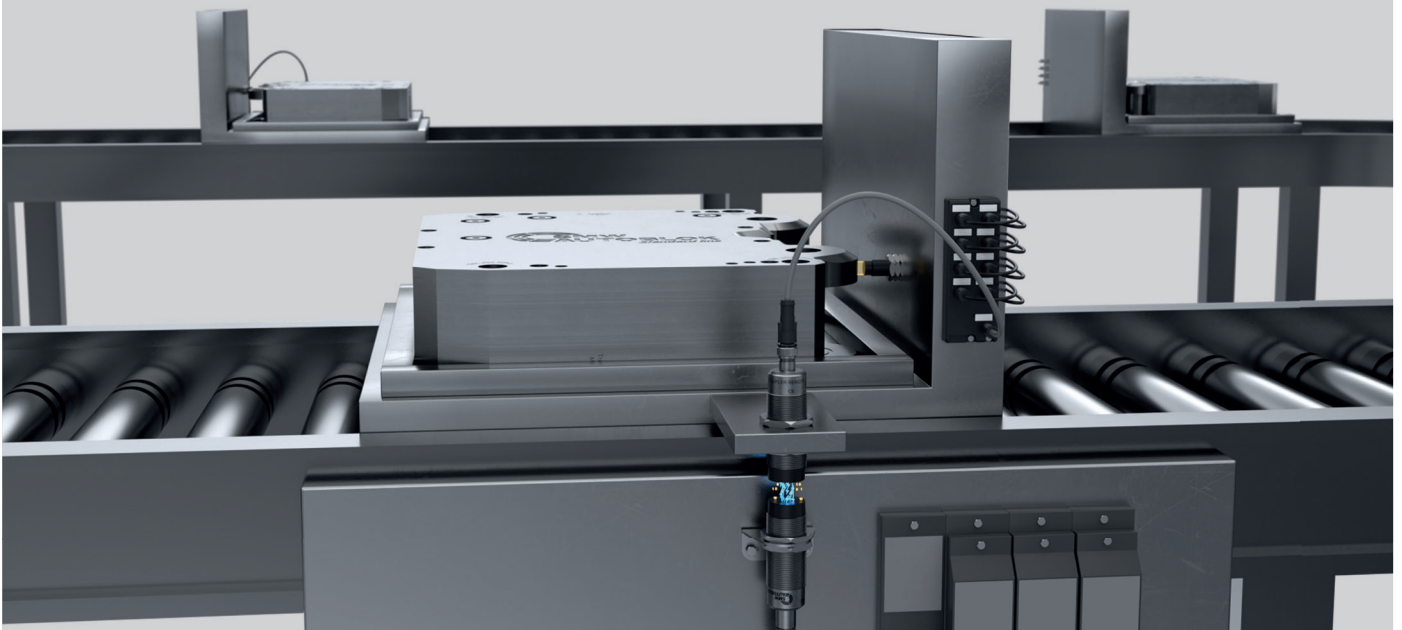


Application: Robotics End of Arm Tooling

- Inductive transmission of energy and signals
- Contact free Ethernet transmission for ultra-fast data transmission for camera application
- Power supply for camera and electro-mechanical gripper, also contact free
- Suitable for clean room applications
- Endless rotating gripper motion possible
- Sensitive gripping of components
- Variable adjustment of the gripping force

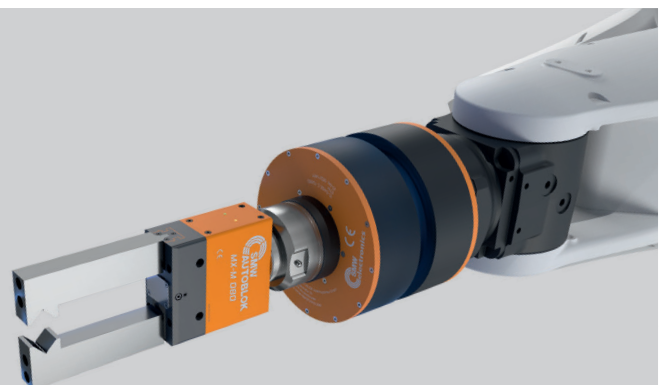

Application examples

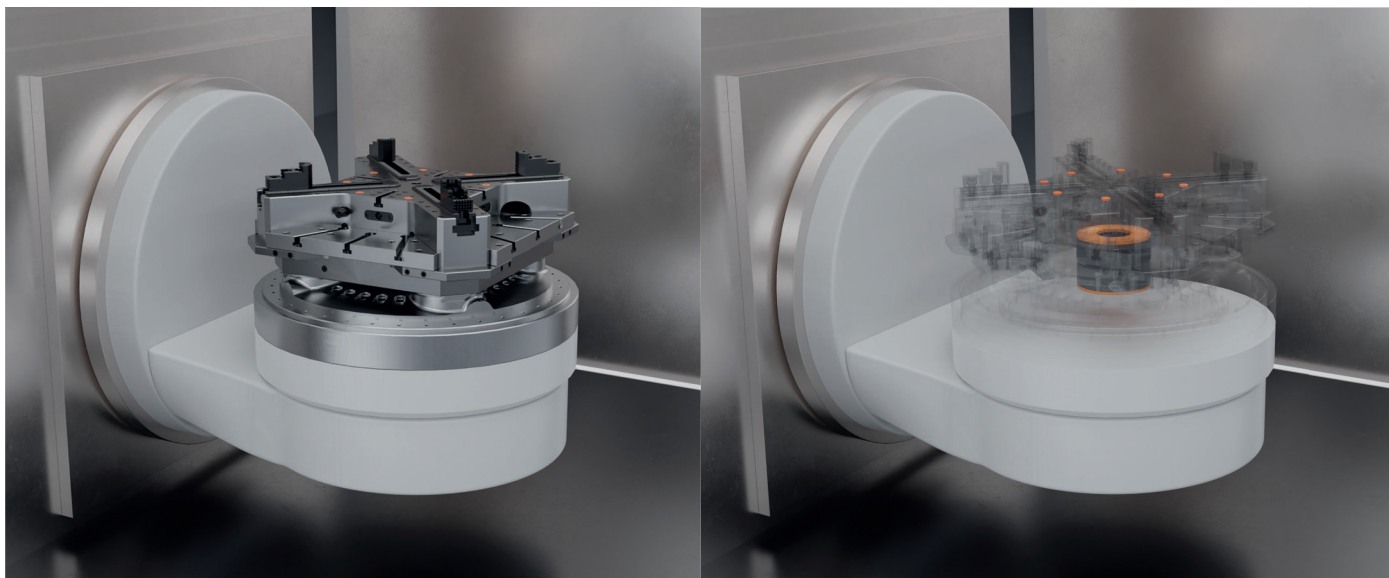


Application: Machine tool

- Inductive transmission of energy and signal between machine table and pallet
- Digitized clamping devices: Monitoring of different process parameters even during machining by using integrated sensor technology
- Ethernet or IO-Link




Application: Off Highway

- Inductive transmission of energy and signal
- Plug replacement for safe communication between excavator and attachment tool
- Wear-resistant (even with a high degree of contamination) and maintenance-free
- Quick and manless tool change

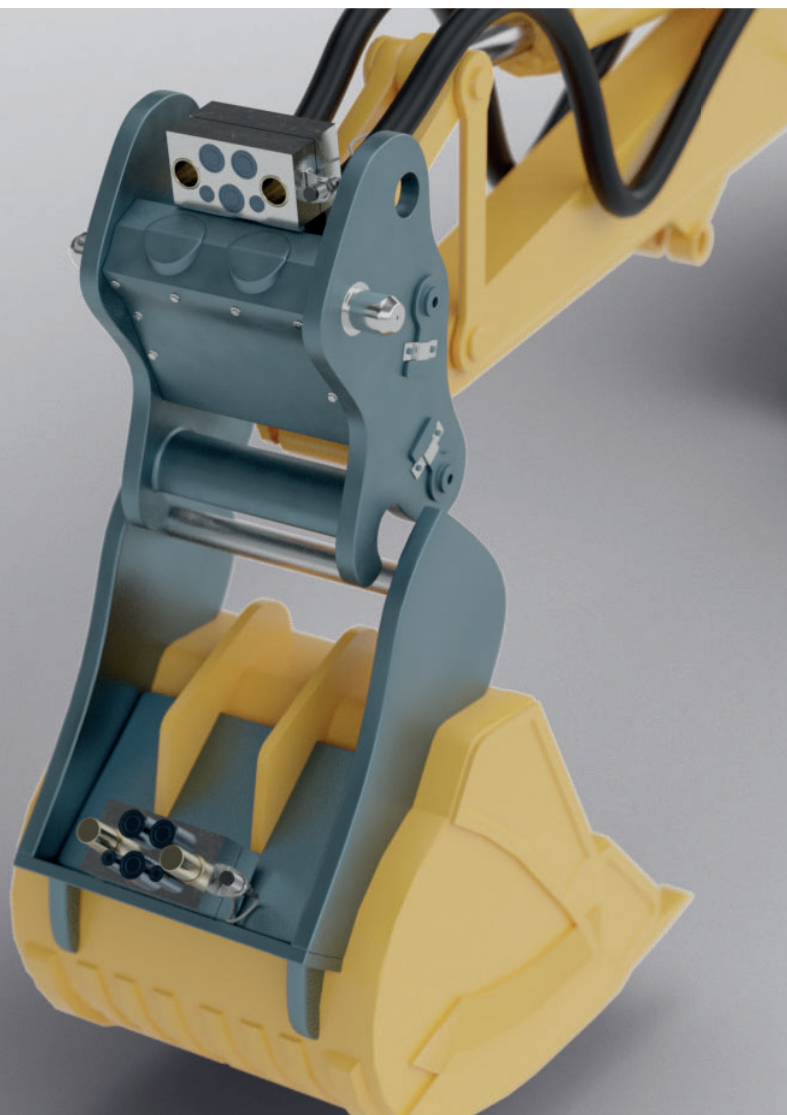

INTEGRATION OVERVIEW

PLUG & PLAY

PRODUCT		CONTROL	INDUCTIVE COUPLING SYSTEM
ZeroAct <i>e-motion</i>		Integrated (DIGITAL)	Optional
SLX <i>e-motion</i>		Integrated (PROFINET/ ETHERNET/IP)	Optional
RT <i>e-motion</i>		 AC-MM (PROFIBUS)	 F280
MM 500 <i>e-motion</i>		 AC-MM (PROFIBUS)	 F280
MM 800 <i>e-motion</i>		 AC-MM (PROFIBUS)	 F280
CC 320 <i>e-motion</i>		Integrated (PROFINET)	 F180

CABLE SET	SOFTWARE PLC modules	HMI Operating screen APP
Standard Sensor/actuator cable M12x1	Machine side not necessary	Machine side not necessary
		Machine side not necessary
Integrated		
		
		
		



Germany

SMW-AUTOBLOK Spannsysteme GmbH
Wiesentalstraße 28 • D-88074 Meckenbeuren
SMW-electronics GmbH
Wiesentalstraße 19 • D-88074 Meckenbeuren
Tel. +49 (0) 7542 - 405 - 0
Fax +49 (0) 7542 - 405 - 0
E-mail ► info@smw-autoblok.de
E-mail ► info@smw-electronics.de



Italy

AUTOBLOK s.p.a.
Via Duca D'Aosta n.24
Fraz. Novaretto
I-10040 Caprie - Torino
Tel. +39 011 - 9638411
Tel. +39 011 - 9632020
Fax +39 011 - 9632288
E-mail ► info@smwautoblok.it



U.S.A.

SMW-AUTOBLOK Corporation
285 Egidi Drive - Wheeling, IL 60090
Tel. +1 847 - 215 - 0591
Fax +1 847 - 215 - 0594
E-mail ► autoblok@smwautoblok.com



France

SMW-AUTOBLOK
17, Avenue des Frères Montgolfier - Z.I. Mi-Plaine
F-69680 Chassieu
Tel. +33 (0) 4.72.79.18.18, Fax +33 (0) 4.72.79.18.19
E-mail ► autoblok@smwautoblok.fr



Japan

SMW-AUTOBLOK Japan Inc.
1-56 Hira, Nishi-Ku, Nagoya
Tel. +81 (0) 52 - 504 - 0203
Fax +81 (0) 52 - 504 - 0205
E-mail ► infosaj@smwautoblok.co.jp



Great Britain

SMW-AUTOBLOK Telbrook Ltd.
7 Wilford Industrial Estate, Ruddington Lane,
Wilford, GB-Nottingham, NG11 7EP
Tel. +44 (0) 115 - 982 1133
E-mail ► info@smw-autoblok-telbrook.co.uk



China

SMW-AUTOBLOK (Shanghai) Work Holding Co.,Ltd.
2dn Floor, Building 1, No.141, Xuanchung Road,
Xuanchung Town, Pudong District,
201399, Shanghai P. R. China
Tel. +86 21 - 5810 - 6396, Fax +86 21 - 5810 - 6395
E-mail ► china@smwautoblok.cn



Spain

SMW-AUTOBLOK IBERICA, S.L.
Ursalto 4 – Pab. 9-10 Pol. 27,
20014 Donostia - San Sebastián (Gipuzkoa)
Tel.: +34 943 - 225 079, Fax: +34 943 - 225 074
E-mail ► info@smwautoblok.es



Mexico

SMW-AUTOBLOK Mexico, S.A. de C.V.
Acceso III No. 16 Int. 9, Condominio Quadrum
Industrial Benito Juárez, Queretaro, Qro. C.P. 76120
Tel. +52 (442) 209 - 5118, Fax +52 (442) 209 - 5121
E-mail ► smwmex@smwautoblok.mx



Canada

SMW AUTOBLOK CANADA CORP
1460 The Queensway - Suite 219
Etobicoke, ON M8Z 1S7
Tel. +1 416 - 316 - 3839
E-mail ► info@smwautoblok.ca



India

SMW-AUTOBLOK Workholding Pvt. Ltd.,
Plot No. 4, Weikfield Industrial Estate, Gat No. 125,
Sanaswadi, Tal - Shirur, Dist - Pune. 412 208
Tel. +91 2137 - 616 974
E-mail ► info@smwautoblok.in



Taiwan

AUTOBLOK Company Ltd.
No.6, Shuyi Rd., South Dist.,
Taichung, Taiwan
Tel. +886 4-226 10826, Fax +886 4-226 12109
E-mail ► taiwan@smwautoblok.tw



Turkey

SMW AUTOBLOK Makina San. Ve Tic. Ltd. Sti.
Yenisehir Mah, Osmanli Blv, Volume Kurtköy Ofis
No: 9, Kat: 2, D: 30, 34912, Pendik, Istanbul
Tel. +90 216 629 20 19
E-mail ► info@smwautoblok.com.tr



Czech Republic / Slovakia

SMW-AUTOBLOK s.r.o.
Merhautova 20
CZ - 613 00 Brno
Tel. +420 513 034 157
E-mail ► info@smw-autoblok.cz



Sweden / Norway

SMW-AUTOBLOK Scandinavia AB
Kommendörsgatan 3
281 35 Hässleholm
Tel. +46 (0) 761 420 111
E-mail ► info@smw-autoblok.se



Poland

SMW-AUTOBLOK Poland Sp. z o.o
OGRODNICZA 12
95 - 100 ZGIERZ
Tel. +48 736 059 699
E-mail ► info@smwautoblok.pl



Holland / Belgium

SMW Autoblok Benelux B.V.
Zeearend 7, 7609PT Almelo
Tel. +31 546 812 615
E-mail ► info@smwautoblok.nl



Korea

SMW-AUTOBLOK KOREA CO., LTD.
1502-ho, Charyong-ro 48beon-gil,
Uichang-gu, Changwon-si
Gyeongsangnam-do, 51391, Republic of Korea
Tel. +82 55 264 9505
E-mail ► info-korea@smw-autoblok.net



ZIBTRPRO
tehnologija obdelave · vpenjalni sistemi